



代码	类型	材质		硬度	表面处理	适用标准
		国标	相当			
TBP21	C型	弹簧钢		44~51HRC	规格<9: 发黑; 规格≥9: 磷化黑	JIS B 2804-2001
TBP22		3Cr13	SUS420J2	34~42HRC	—	
TBP23		0Cr18Ni9	SUS304	30~40HRC	—	

挡圈尺寸

挡圈装配尺寸

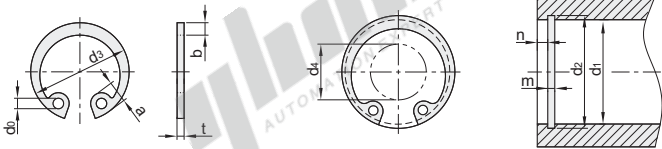

① d4: 将挡圈嵌入d1时的最小内周直径(间隙内径)。



型号		挡圈						参考		适用轴(参考)					
代码	规格	d ₃		t		b (约)	a (约)	d ₀ (min)	d ₄	d ₁	d ₂		m		n(min)
(弹簧钢) TBP21 (SUS420J2) TBP22 (SUS304) TBP23	6	6.7	±0.18	0.4	±0.03	0.7	1.6	0.8	2.5	6	6.25	+0.04	0.5	+0.10 0	0.5
	7	7.7				0.8	1.7		3	7	7.3				
	8	8.8				0.9	1.7		3.5	8	8.4	+0.06 0			
	9	9.8		0.6	±0.04	1.1	2.2	4	9	9.4	0.7	0.6			
	10	10.7				1.5	2.8	4	10	10.4					
	11	11.8	1.5			3	4	11	11.4						
	12	13	1	±0.05	1.7	3.1	1.5	5	12	12.5	+0.11 0	1.15			
	13	14.1			1.7	3.1		6	13	13.6					
	14	15.1			1.9	3.6		7	14	14.6					
	15	16.2			1.9	3.6	8	15	15.7						
	16	17.3			1.9	3.7	8	16	16.8						
	17	18.3	±0.2	1.2	1.9	3.8	1.7	9	17	17.8	+0.21 0	1.35			
	18	19.5			2.4	4		10	18	19					
	19	20.5			2.5	4		11	19	20					
	20	21.5			2.5	4	12	20	21						
	22	23.5			2.5	4.1	13	22	23						
	24	25.9	±0.25	(1.6)	±0.06	2.5	4.3	2	15	24	25.2	+0.25 0	(1.75)	+0.14 0	
	25	26.9				3	4.4		16	25	26.2				
	26	27.9				3	4.6		16	26	27.2				
	28	30.1				3	4.6	18	28	29.4					
	30	32.1				3	4.7	20	30	31.4					
	32	34.4	±0.4	1.8	±0.07	3.5	5.2	2.5	21	32	33.7	+0.30 0	2.2		
	34	36.6				3.5	5.2		23	34	35.7				
	35	37.8				3.5	5.2		24	35	37				
	36	38.8				3.5	5.2	25	36	38					
	37	39.8				3.5	5.2	26	37	39					
	38	40.8	±0.55	2	±0.08	4	5.3	3	27	38	40	+0.35 0	3.2	+0.18 0	3
	39	42.5				4	5.4		27	39	41.2				
	40	43.5				4	5.7		28	40	42.5				
	42	45.5				4	5.7	30	42	44.5					
	45	48.5				4.5	5.7	33	45	47.5					
	46	49.5	±0.45	2.5	±0.09	4.5	5.7	2.5	33	46	48.5	+0.35 0	2.7		
	47	50.5				4.5	6.1		34	47	49.5				
	48	51.5				4.5	6.1		35	48	50.5				
	50	54.2				4.5	6.5	37	50	53					
52	56.2	5.1				6.5	39	52	55						
55	59.2	±0.09	3	±0.09	5.1	6.5	3	41	55	58	+0.35 0	3.2	+0.18 0	3	
56	60.2				5.1	6.6		42	56	59					
58	62.2				5.1	6.6		44	58	61					
60	64.2				5.5	6.8	46	60	63						
62	66.2				5.5	6.9	48	62	65						
63	67.2	±0.55	3	±0.09	5.5	6.9	3	49	63	66	+0.35 0	3.2	+0.18 0	3	
65	69.2				6	7.4		50	65	68					
68	72.5				6	7.4		53	68	71					
70	74.5				6	7.4	55	70	73						
72	76.5				6.6	7.4	57	72	75						
75	79.5	±0.55	3	±0.09	6.6	7.8	3	60	75	78	+0.35 0	3.2	+0.18 0	3	
80	85.5				7	8		64	80	83.5					
85	90.5				7	8		69	85	88.5					
90	95.5				7.6	8.3	73	90	93.5						
95	100.5				8	8.5	77	95	98.5						

① ()厚度t=1.6mm, 暂且可以把它作为1.5mm, 此时m=1.65。



请按图示订货

型号	
代码	规格
(TBP21)	6
(TBP22)	7
(TBP23)	8

TBP21 — 6



未税价(元)

● 优惠价

数量	1~49	50~
价格	100%	另行报价



交货期
3

总目录

目录

使用说明

螺钉

螺栓

螺柱

铆接类

组合件

螺母

垫圈

挡圈

树脂类

带挡块

螺钉

柱塞

紧固件

进口专区

紧固件

专用配件

经济型

轴承

标准型

轴承

进口型

轴承

品牌轴承

带座轴承

吊环

索具

电子焊接

工具

手动工具

电动工具

气动工具

储存工具

量具

刀具

技术资料