



代码	类型	材质	硬度 (肖氏)	颜色	使用 温度范围	使用压力	线速度	用途
XUE31	UN型	TPU	HS90±5	蓝色	-20~100°C	30MPa 以下	0.03~0.5m/s	孔轴通用的轴向滑动 单向密封



安装方式

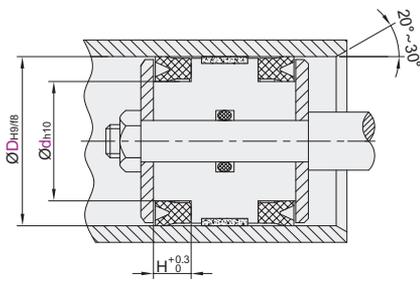

① 活塞缸内面应作0.1~0.8μm Ra的研磨或抛光。

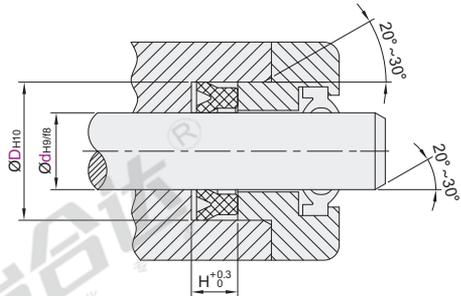

② 活塞杆表面应作0.2~0.4μm Ra的抛光。



视角标准：第一视角

型号	d	D	B	H	
XUE31	4	10	4	4.5	
		12			
	5	11	8	9	
			12	5	6
	6	12	4	4.5	
			6	7	
	8	12	5	6	
			14	6	7
	9	19	6	7	
			8	9	
			4	5	
			6	7	
	10	16	5	6	
			6	7	
		18	8	9	
			6	7	
	11.2	20	5	6	
			5	6	
	12	20	6	7	
			8	9	
14	22				
16	24				
18	26				
20	28				
22	30	5	6		
22.4	30				
23.5	31.5				
24	32				
25	33				

型号	d	D	B	H
XUE31	27	35		
	28	36	5	6
	30	40		
	31.5	41.5		
	32	42		
	35			
	35.5	45		
	36	46		
	38	48		
	40	50		
	45	55		
	45	56	7	8
	50	60		
	53	63		
	55	65		
	56	66	6	7
	58	68		
	60	70		
	60	71	7	8
	63	73		
	65	75		
	70	80	6	7
	75	85		
	80	90		
	85	100	10	11
	90	105	9	10
	95	110	10	11
	100	115	9	10



请按图示订货

型号	d	D	B
XUE31	4	10	4
	5	12	4

XUE31-d4-D10-B4



未税价(元)

优惠价

数量	1~10	11~
价格	100%	另行报价



交货期

7