


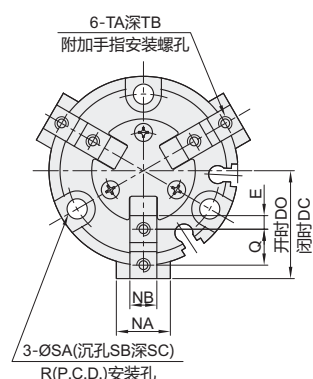



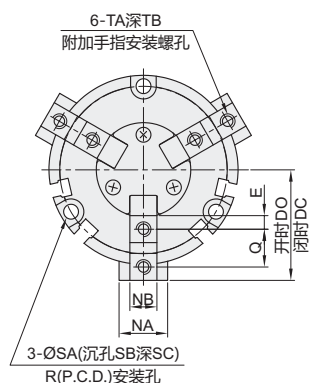


代码	类型	动作形式
WGY02	平行开闭型 标准型	双作用

缸径: 16~25



缸径: 32~80

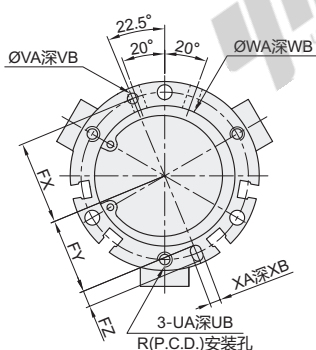

尺寸表

缸径	AA	AB	AC	B	CA	CB	DC	DO	EC	EO	FX	FY	FZ	G	V	J	K	L	A	NA	NB
16	35	32		30		11	15	17	5	7	12.5	11		25	4	10	4			8	5 _{0.03}
20	38	35		36	7	13	18	20	6	8	14.5	13	3	27	5	12	5	2 ^{+0.025} ₀		10	6 _{0.03}
25	40	37	3	42		15	21	24	7	10	17	14.5		28		14	6		2	12	
32	44	41		52	8	16	28	32	8	12	22	19.5	5	30.5	6	20				14	8 _{0.036}
40	47	44		62		17	31	35	10	14	26.5	23.5	6	32	7	21	9	3 ^{+0.025} ₀		16	
50	55	52		70	9	20	35	41	11	17	31	28		37.5	9	24	10	4 ^{+0.030} ₀		18	10 _{0.036}
63	66	62	4	86	12	22	43	51	15	23	38	34.5	7	44	11	28	11	6 ^{+0.030} ₀	3	24	12 _{0.043}
80	82	77	5	106	13.5	27	53.5	63.5	21.5	31.5	47.5	43.5	8	56	12	32	12	8 ^{+0.036} ₀	4	28	14 _{0.043}

缸径	E	P	Q	R	SA	SB	SC	TA	TB	UA	UB	VA	VB	WA	WB	XA	XB
16	2	M3	6	25	3.4	6.5	8		5	M3	4.5	2 ^{+0.025} ₀		17 ^{+0.043}		2 ^{+0.025} ₀	2
20	2.5		7	29			9.5	M3					2	21 ^{+0.052}	1.5		
25	3		8	34	4.5		10		6					26 ^{+0.052}		3 ^{+0.025} ₀	3
32	4.5	M5	11	44		8		M4	8			3 ^{+0.025} ₀	3	34 ^{+0.062}			
40			12	53	5.5	9.5	9	M4						42 ^{+0.062}	2	4 ^{+0.030} ₀	4
50	5		14	62			12	M5	10			4 ^{+0.030} ₀	4	52 ^{+0.074}		5 ^{+0.030} ₀	5
63	5.5		17	76	6.6	11	14	M5	10			5 ^{+0.030} ₀	5	65 ^{+0.074}	2.5	6 ^{+0.030} ₀	6
80	6	RC1/8	20	95			19	M6	12			6 ^{+0.030} ₀	6	82 ^{+0.087}	3	6 ^{+0.030} ₀	6

型号		手指行程	磁性开关数量	接管口径	夹持力N (每个手指夹持力的有效值)		使用流体	使用压力范围 MPa	环境流体温度 ℃	重复精度	最高使用频率 (c.p.m)	润滑
代码	缸径				外径夹持力	内径夹持力						
WGY02	16	4		M3	14	16						
	20	4			25	28		0.2~0.6			120	
	25	6			42	47						
	32	8	0		74	82						
	40	8	2	M5	118	130	空气		-10~60	±0.01		
	50	12			187	204		0.1~0.6			60	
	63	16			335	359						
	80	20		Rc1/8	500	525					30	

① 缸径16~25配套磁性开关WHS13-L2-2, 缸径32~80配套磁性开关WHS23-L2-2。



请按图示订货

型号		手指行程	磁性开关数量
代码	缸径		
WGY02	20	4	0
	25	6	0

WGY02—20—4—2



未税价(元)

优惠价	
数量	1~29
价格	100% 另行报价

交货期	
数量	1~29
价格	100% 另行报价