


直通接头/端插直通头  
双向插入型接头/塞子  
变径

# 精密型 快插接头


直通接头

代码	类型	材质
J-XXP01	变径 直通接头	PBT

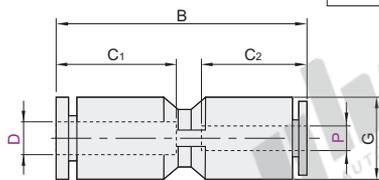

端插直通头

代码	类型	材质
J-XXP51	变径 端插直通头	PBT



型号	D	P	B	G	C <sub>1</sub>	C <sub>2</sub>	有效断面积 (mm <sup>2</sup> )	重量 (g)
J-XXP01	6	4	34.5	13	17	14.9	4.81	3.2
		8	39	14.5	18.4			
	10	6	42.5	18.5	21.2	17	11.03	6.9
		8	43			18.4	20.35	7.1
	12	8	48	21	23.4	21.2	33.95	10.5
		10	48.5					

型号	D	P	B	E	G	C	有效断面积 (mm <sup>2</sup> )	重量 (g)	
J-XXP51	4	6	38.4	19	11	14.9	4.8	1.5	
		8	35	21.5					13
	6	4	42.2	17.2	23.5	12.5	14.9	4.5	4.3
		6	40.7			12.9	17	11	2.3
	8	6	46.1	26.5	14.4	18.1	20.3	2.8	
		6	39.6						12.9
	10	8	43.3	18.1	20.2	14.4	18.1	20.3	3
		10	51.2						



型号	代码	D	P
J-XXP01	8	4	6

J-XXP01-D8-P4



优惠价	数量	1~29	30~
	价格	100%	另行报价



1



型号	代码	D	P
J-XXP51	4	6	8

J-XXP51-D4-P6




优惠价	数量	1~29	30~
	价格	100%	另行报价



1


双向插入型直通头

代码	类型	材质
J-XXP61	变径 双向插入型直通头	PBT



塞子

代码	类型	材质
J-XXP81	变径 塞子	PBT

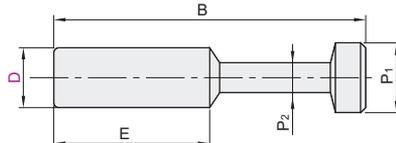

型号	D	P	B	有效断面积 (mm <sup>2</sup> )	重量 (g)
J-XXP61	6	4	39.5	2.5	0.5
		6	36.9	—	0.6
	8	6	38.1	4.8	0.8
		8	41.5	—	1.3
	10	8	43	11.4	1.5
		10	44.4	—	1.8
	12	10	48	20.3	2.4
		12	52.5	—	4.5
	16	12	53.5	31.8	3.5

型号	D	B	E	P <sub>1</sub>	P <sub>2</sub>	重量 (g)
J-XXP81	4	27.9	15	5	3	0.3
	6	32.6	16	7	—	0.7
	8	36.7	18	9	4	1.3
	10	42.3	20.5	11	5	2.1
	12	43.2	23	13	6	2.8
	16	49	24	17	8	5.3



型号	代码	D	P
J-XXP61	8	6	6

J-XXP61-D8-P4



优惠价	数量	1~29	30~
	价格	100%	另行报价



1



型号	代码	D	B
J-XXP81	6	8	36.7

J-XXP81-D6



优惠价	数量	1~29	30~
	价格	100%	另行报价



1

气调速接头类  
D8