

T型接头/Y型接头


外螺纹

精密型 清洁配管用快插接头


代码	类型	材质	
		主体	螺纹部
J-XYC11	外螺纹	T型接头	PP
J-XYC16		Y型接头	SUS304



T型接头
J-XYC11

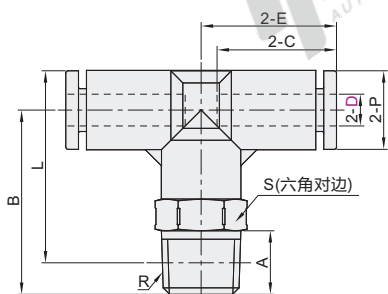

Y型接头
J-XYC16

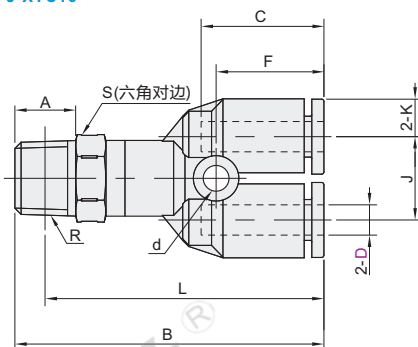

T型接头

代码	型号	公称型号	R	A	B	L	P	C	E	S	有效截面积 (mm ²)	重量 (g)
J-XYC11	4	1	R1/8	8	23.3	24.3	10	15	17	10	4.1	12
	6	2	R1/4	11	26	28.5	13	17.1	20.3	12	10	15.5
	8	1	R1/8	8	26.3	29.8	15	18.4	22.4	14	16.5	23
	8	2	R1/4	11	29.3	30.8	17.5	20.4	25.4	17	30	19.5
	10	3	R3/8	12	31.1	32.3	21	23.1	28.6	21	47	25
	10	2	R1/4	11	36	38.7	20	22.4	21	37	30	37.5
	12	3	R3/8	12	37	39.4	21	23.1	28.6	21	47	36.5
	12	3	R3/8	12	39	43.2	21	23.1	28.6	21	47	44
	12	3	R3/8	12	39	43.2	21	23.1	28.6	21	47	54.5

Y型接头

代码	型号	公称型号	R	A	B	L	P	C	J	d	F	S	有效截面积 (mm ²)	重量 (g)
J-XYC16	4	1	R1/8	8	40.7	36.7	10	15	11	3.4	14.2	10	4.2	12.5
	6	1	R1/8	8	44.5	40.5	12.5	17.1	12	3.2	15.9	12	10	15.5
	6	2	R1/4	11	47.5	41.5	14.5	18.1	14	3.2	17.2	14	16.5	23
	8	1	R1/8	8	48.7	44.7	18	20.9	18	4.5	19.7	17	30	20.5
	8	2	R1/4	11	51.7	45.7	21	23.6	20	4.2	22.4	21	37	25.5
	8	3	R3/8	12	53.5	47.2	21	23.6	20	4.2	22.4	21	37	24.5
	10	2	R1/4	11	58.5	52.5	21	23.6	20	4.2	22.4	21	37	38
	10	3	R1/4	11	59.5	53.2	21	23.6	20	4.2	22.4	21	37	45.5
	12	3	R3/8	15	64.7	58.4	21	23.6	20	4.2	22.4	21	37	45.5

T型接头

代码	型号	公称型号
J-XYC11	4	1
J-XYC11	6	2

J-XYC11—D4—1

Y型接头

代码	型号	公称型号
J-XYC16	4	1
J-XYC16	6	2

J-XYC16—D6—1



数量	1~29	30~
价格	100%	另行报价



交货期
9

气
调
速
接
头
类

D8