



精密型 耐热快速接头

- 直接头
- 内六角孔直接头
- 外螺纹

直接头

代码	类型	材质			表面处理
		主体	螺纹部	密封部材料	主体
J-XP01	外螺纹 直接头	黄铜	黄铜	耐热NBR	镀镍



型号	公称	R	D	P	B	C1	C2	A	L	S	喷嘴	有效断面	重量
代码	d	型号									直径	面积 (mm²)	(g)
J-XP01	4	M5	M5	6	9.8	22.7	17.6	2.9	19.8	10	1.8	2	12
		1	R1/8			23.7		8	19.7		2.5	4.5	13
		2	R1/4			26.7		11	20.7	14			22
	6	M5	M5	8	11.8	25.5		2.9	22.6	12	1.8	2	17
		1	R1/8			25.1	19.5	8	21.1		4	11	14
		2	R1/4			29.1		11	23	14			23
	8	3	R3/8			29.9		12	22.7	17			34
		1	R1/8			29.9		8	25.9				27
		2	R1/4			28.6	20.2	11	22.6	14	6	20	25
	10	3	R3/8			28.9		12		17			32
		1	R1/8			33.3		8	29.3			23	40
		2	R1/4			31.8	23.2	11	27.3	17			39
J-XP01	12	3	R3/8			31.8	19.5	12	25.5		8	35	46
		4	R1/2			35.8		15	27.6	22			67
		2	R1/4			38.9		11	32.9		8.5	47	61
	12	3	R3/8	14	20	34.9	26.3	12	28.6	21	9	50	62
		4	R1/2			36.9		15	28.7	22			74



请按图示订货

型号	公称	R
代码	d	型号
J-XP01	4	M5
	1	R1/8

J-XP01-d4-M5



未税价(元)



数量	1~29	30~
价格	100%	另行报价



交货期
1

内六角孔直接头

代码	类型	材质			表面处理
		主体	螺纹部	密封部材料	主体
J-XP11	外螺纹 内六角孔直接头	黄铜	黄铜	耐热NBR	镀镍

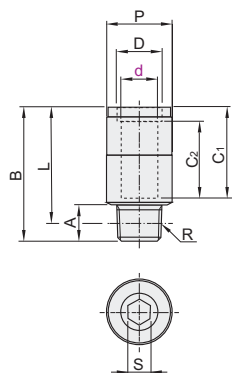

型号	公称	R	D	P	B	C1	C2	A	L	S	喷嘴	有效断面	重量
代码	d	型号									直径	面积 (mm²)	(g)
J-XP11	4	M5	M5	6	9.9	22.6	17.6	2.9	19.7	2	2.1	2	11
		1	Rc1/8			23.7		8	19.7		2.5	2.6	12
		2	R1/4			24.7		11	18.7			5.2	19
	6	M5	M5	8	11.9	25.5		2.9	22.6	2	2.1	2	15
		1	R1/8			25.1	19.5	8	21.1				13
		2	R1/4			29.9		11	19	4	4.1	11	18
	8	3	R3/8			26.1		12	19.7				27
		1	R1/8			29.9		8	25.9				20
		2	R1/4			28.6	20.2	11	22.6	5	5.1	17	20
	10	3	R3/8			25.9		12	19.6				26
		1	R1/8			33.3		8	29.3		6.2	23	35
		2	R1/4			32.3	23.2	11	26.3				33
J-XP11	12	3	R3/8			31.8	19.5	12	25.4	6	5.1	17	38
		4	R1/2			20.8		15	24.6				56
		2	R1/4			38.9		11	32.9		6.2	20	56
	12	3	R3/8	14	20.8	34.9	26.3	12	28.6	5	8.2	40	49
		4	R1/2			36.9		15	28.7				64



请按图示订货

型号	公称	R
代码	d	型号
J-XP11	4	M5
	1	R1/8

J-XP11-d4-M5



未税价(元)

数量	1~29	30~
价格	100%	另行报价



交货期
1

气动
调节阀
D8