


# 点式喷嘴

## 标准型 喷射形状·单点形




代码	喷射形状	外形特征	接口类型	材质		最高使用压力	最高使用温度	推荐流体
				主体	管			
NHR01	单点形	标准型	外螺纹 内螺纹	SUS316	SUS304	5Bar	200°C	空气、水
NHR02								


□ 请使用推荐流体，以保证喷射效果。

- 特点：  
 ● 孔径、长度多种规格可选，管可弯曲；  
 □ 用途：  
 ● 清洗，除尘，冷却，干燥等。
- 喷射形状 单点形


外螺纹 NHR01  
公称型号：0.5/1

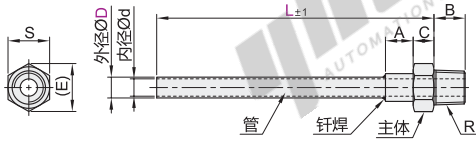


外螺纹 NHR01  
公称型号：3/5/6

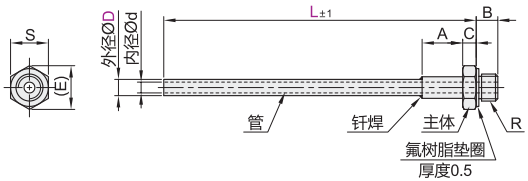

内螺纹 NHR02  
公称型号：1

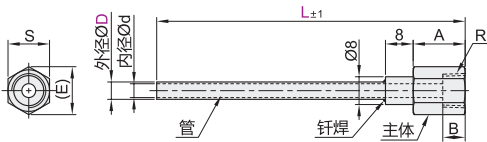

内螺纹 NHR02  
公称型号：3/5/6

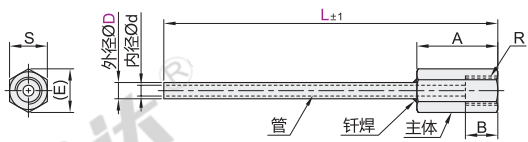

视角标准：第一视角

型号		外径 D	L	螺纹 R	内径 d	A	B	C	S	(E)							
代码	公称型号																
外螺纹 NHR01	0.5	1	25 50 75 100 125 150	R1/16	0.5	8	8	4	10	11.5							
		1.5															
		2															
		2.5															
		3															
		4															
	1	5	30 50 75 100 125 150 200	R1/8	4	8	9	6	12	13.8							
		6															
		1															
		1.5															
		2															
		3															
	3	1		M3	0.5	9.5	4	2.5									
		1.5															
		2															
		1			25 50 75 100 125 150						M5	0.5	7	4	2.5	8	9.2
		1.5															
		2															
2.5																	
3																	
2		M6	0.5	9		5	3										
1.5																	
2																	
2.5																	
3																	
4			30 50 75 100 125 150 200		Rc1/8					4	8		12	13.8			
6																	
1		M3		0.5		15	-	8	9.2								
1.5																	
2																	
2.5																	
3																	
1				M5	0.5					6		8	9.2				
1.5																	
2																	
2.5																	
3																	
1		M6			0.5												
1.5																	
2																	
2.5																	
3																	
1				M6	0.5												
1.5																	
2																	
2.5																	
3																	

请按图示订货

型号	外径 D	L
NHR01-0.5-D1-L50	1.5	25 50 75

未税价(元)

● 优惠价  
 数量 1-19 20~  
 价格 100% 另行报价

交货期  
 1