
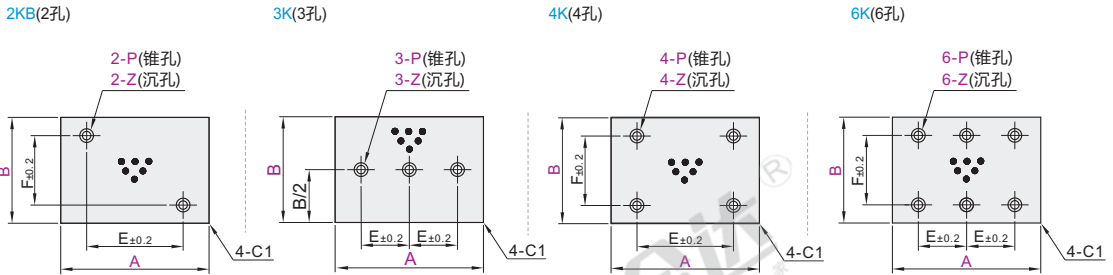
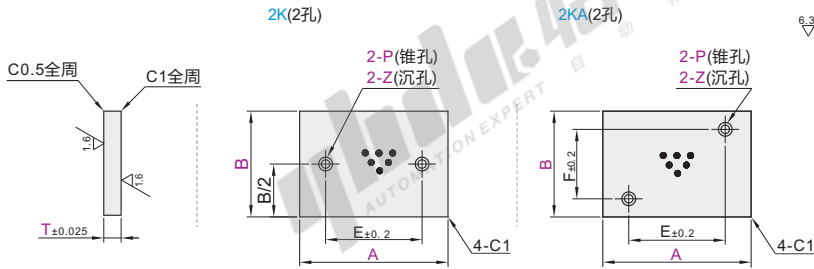


尺寸指定型 · 锥孔型/沉孔型

铜合金


无油线性滑板

代码	类型	材质
OBH01	尺寸指定型 锥孔型	高力黄铜(SP2)
OBH11	尺寸指定型 沉孔型	镶嵌固体润滑剂



代码	型号	最小单位1		T 选择	P/Z		E	F	
		A	B		T=5	T=10			
锥孔型 OBH01	2K	50~60	28~80	5	P5	Z6	30	—	
		61~80					40		
		81~100					60		
	3K	101~120		5	P6	80			
		121~150				100			
		151~180				65×2			
沉孔型 OBH11	2KA	50~60	50~100	5	P5	Z6	30	30(B≤80)	
		61~80					40		
	2KB	81~100		10	P6	60	60(B≥81)		
		101~120				80			
		121~150		5	P6	100			
		181~200				80×2			
	4K	80~100		50~100	5	P5	Z6	60	30(B≤80)
		101~120						80	
		121~150		10	P6	100	60(B≤100)		
		150~180				80(B≤120)			
6K	181~200	100~150	10	P6	Z8	65×2	100(B≥121)		
						80×2			

孔加工图



螺钉 公称直径	锥孔型		沉孔型	
	P5	P6	Z6	Z8
d	5.3	6.5	6.5	8.5
d ₁	11.5	13.5	11	14
h	3	3.5	4.5	5.5

① 螺钉需另行购买。

螺钉公称直径	M×L		
	P5	P6-Z6	Z8
T=5	M5×16	M6×16	—
T=10	—	M6×20	M8×20



代码	公称尺寸	最小单位1		T 选择	螺钉公称直径选择	
		A	B		T=5	T=10
OBH01	2K	50~60	28~80	5	P5	Z6

OBH01-2K-A50-B50-T10-P6



数量	优惠价	
	1~9	10~
价格	100%	另行报价



7