





重载型·可互换

高级 轻预压(FC):0~0.02C


高组装高型直线导轨

代码	类型	精度等级	滑块固定方式	滑块数量	导轨固定方式	材质
IBC31	组件	高级	上锁式	单滑块	上锁式	合金钢
IBC33				双滑块		

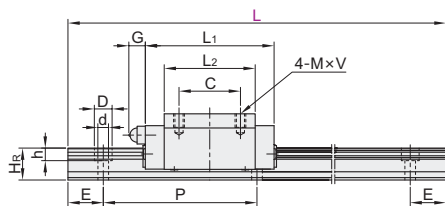

① 静态容许力矩, $M_R/M_P/M_Y$ 的数值请参考下表。

① 精度等级选型参照P1361页。



视角标准：第一视角

型号	H	L	H1	F	滑块尺寸									
代码	H	L	H1	F	W	B	B1	C	L1	L2	G	MxV	T	H2
IBC31	28	100~1480	4.3	9.5	34	26	4	26	56.5	38.5	6	M4×5	6	9
IBC33	30	100~1960	6	12	44	32	6	36	71.6	53.2		M5×6	9.5	8
	40	100~1960	7	12.5	48	35	6.5	35	80	59	12	M6×8		13.5
	45	200~1960	9.5	16	60	40	10	40	95.7	67.7		M8×10	9	12

① L尺寸的最小值由滑块长度与滑块数量而定，请确认。

滑轨尺寸					基本额定负载(KN)					静态容许力矩(KN·M)					重量	
W_R	H_R	D	h	d	P	固定螺钉	C(动)	C0(静)	M_R	M_P	M_Y	滑块(kg)	滑轨(kg/m)			
15	13.5	7.5	5.3	4.5		M4×16	10.6	16.2	0.126	0.0995	0.0995	0.2	1.3			
20	16	9.5	8.5	6	60	M5×16	18.3	27.5	0.296	0.226	0.226	0.4	2.1			
23	20	11	9	7		M6×20	24.7	36.3	0.437	0.334	0.334	0.6	3.0			
28	24	14	12	9	80	M8×25	33.6	49.2	0.716	0.528	0.528	0.9	4.6			

型号	H	L
IBC31	28	100~1480
IBC33	30	100~1960
IBC33	40	100~1960
IBC31	H30	L260

请按图示订货



数量	1~4	5~
价格	100%	另行报价

未税价(元)



交货期	5
-----	---

■ N(安装孔数)/E(螺钉中心孔至端面距离)

H	最小单位1	N(安装孔数)	E
28	100~139	2	
	140~199	3	
	200~259	4	
	260~319	5	
	320~379	6	
	380~439	7	
	440~499	8	
	500~559	9	
	560~619	10	
	620~679	11	
	680~739	12	
	740~799	13	
	800~859	14	
	860~919	15	
	920~979	16	
	980~1039	17	
	1040~1099	18	
	1100~1159	19	
	1160~1219	20	
	1220~1279	21	
	1280~1339	22	
	1340~1399	23	
	1400~1459	24	
	1460~1480	25	
	100~139	2	
	140~199	3	
	200~259	4	
	260~319	5	
	320~379	6	
	380~439	7	
	440~499	8	
	500~559	9	
	560~619	10	
	620~679	11	
	680~739	12	
	740~799	13	
	800~859	14	
	860~919	15	
	920~979	16	
	980~1039	17	
	1040~1099	18	
	1100~1159	19	
	1160~1219	20	

■ N(安装孔数)/E(螺钉中心孔至端面距离)


H	最小单位1	N(安装孔数)	E
30	1220~1279	21	
	1280~1339	22	
	1340~1399	23	
	1400~1459	24	
	1460~1519	25	
	1520~1579	26	
	1580~1639	27	
	1640~1699	28	
	1700~1759	29	
	1760~1819	30	
	1820~1879	31	
	1880~1939	32	
	1940~1960	33	
	100~141	2	
	142~201	3	
	202~261	4	
	262~321	5	
	322~381	6	
	382~441	7	
	442~501	8	
	502~561	9	
	562~621	10	
	622~681	11	
	682~741	12	
	742~801	13	
	802~861	14	
	862~921	15	
	922~981	16	
	982~1041	17	
	1042~1101	18	
	1102~1161	19	
	1162~1221	20	
	1222~1281	21	
	1282~1341	22	
	1342~1401	23	
	1402~1461	24	
	1462~1521	25	
	1522~1581	26	
	1582~1641	27	
	1642~1701	28	
	1702~1761	29	
	1762~1821	30	
	1822~1881	31	

■ N(安装孔数)/E(螺钉中心孔至端面距离)

H	最小单位1	N(安装孔数)	E
40	1882~1941	32	
	1942~1960	33	
	200~279	3	
	280~343	4	
	344~423	5	
	424~503	6	
	504~583	7	
	584~663	8	
	664~743	9	
	744~823	10	
	824~903	11	
	904~983	12	
	984~1063	13	
	1064~1143	14	
	1144~1223	15	
	1224~1303	16	
	1304~1383	17	
	1384~1463	18	
	1464~1543	19	
	1544~1623	20	
	1624~1703	21	
	1704~1783	22	
	1784~1863	23	
	1864~1943	24	
	1944~1960	25	

① P：螺钉孔间距

① E：螺钉中心孔至端面距离



■ 精度基准

尺寸精度	28	30	40	45
单滑块	高度H的容许尺寸误差	±0.1		
	宽度F的容许尺寸误差	±0.1		
双滑块	高度H的相互误差	0.02		
	宽度F的相互误差(基准轨)	0.02		
	滑块C面对滑轨A面的行走平行度	0.03		
	滑块D面对滑轨B面的行走平行度	请参阅行走精度表P1361		