





代码	类型	限位孔	螺纹	主体		螺栓/螺钉 代码		
				材质	表面处理			
ICR01	单件 凹型限位块	无孔	—	S45C	镀硬铬	—		
ICR04			粗牙		发黑			
ICR06			细牙		镀硬铬			
ICR05		组件 凹型限位块+定位螺栓	螺纹孔		粗牙		发黑	PBE32
ICR11							镀硬铬	TDC61
ICR12							发黑	
ICR15							镀硬铬	
ICR16	凹型限位块+聚氨酯螺钉	发黑						

特点：结构紧凑，特别适用于导轨长度大于运动行程的单导轨应用场景。


凹型限位块(无孔)  
ICR01

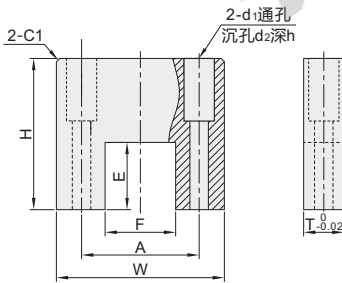


凹型限位块(螺纹孔)  
ICR04/05/06/07

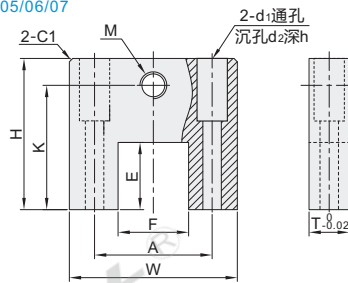

凹型限位块+定位螺栓  
ICR11/12

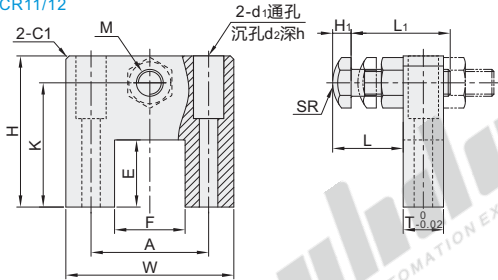

凹型限位块+聚氨酯螺钉  
ICR15/16

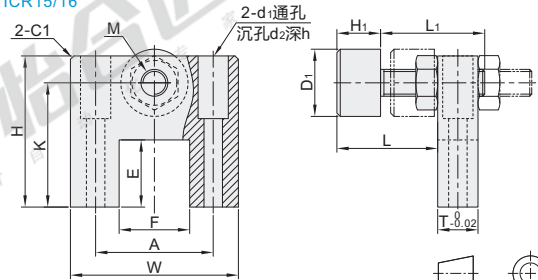

视角标准：第一视角

代码	型号 适用导轨规格	W	H	A	E	F	T	M		K	d <sub>1</sub>	d <sub>2</sub>	h
								粗牙	细牙				
单件	15A	27	35	11	16	12	M6×1.0	M6×0.75	19	5.5	9	12	
	15B	38	16	16	12	31			18				
	20A	35	12	21	12	M8×1.25	M8×1.0	27	5.5	9	19		
	20B	45	19	24	16			37			22		
组件	25A	40	16	24	16	M8×1.25	M8×1.0	32	6.6	11	20		
	25B	51	23	16	16			44			24		
	30B	65	27	29	16	M10×1.5	M10×1.0	51	9.0	14	29		
	35B	70	30	35	16			61			36		

代码	型号 适用导轨规格	L		L <sub>1</sub>		H <sub>1</sub>		SR	D <sub>1</sub>	匹配导轨 宽度系列	适用怡合达 导轨型号
		ICR11/12	ICR15/16	ICR11/12	ICR15/16	ICR11/12	ICR15/16				
单件	15A	7~22	11~23	30	25	4	10	4	15	微型15系列	IAC/IAF-H16 IAJ/IAM-H16
	15B	10~28	14~31	35	30	5.5	13			重载15系列	IBJ-H24 IBC-H28
	20A									微型20系列	—
	20B	重载20系列	IBJ/IBP-H30 IBC/IBF-H30								
组件	25A	10~28	14~31	35	30	5.5	13	5	20	微型25系列	—
	25B									重载25系列	IBJ/IBP-H36 IBC/IBF-H40
	30B	12~36	16~39	45	40	7	15			重载30系列	IBJ/IBP-H42 IBC/IBF-H45
	35B	12~36	16~39	45	40	7	15			重载35系列	—



代码	型号 适用导轨规格
ICR01	15A
ICR04	15B
	20A

ICR01-15B



● 优惠价  
数量 1~9 10~  
价格 100% 另行报价



交货期  
7