


代码	类型	限位孔	螺纹	主体		螺栓/螺钉代码
				材质	表面处理	
ICR61	单件	无孔	—	S45C	镀硬铬	—
ICR64					发黑	
ICR66					发黑	
ICR65					镀硬铬	
ICR67					发黑	
ICR71	组件	方型限位块+定位螺栓	螺纹孔	粗牙	镀硬铬	PBE32
ICR72					发黑	
ICR75					镀硬铬	TDC61
ICR76					发黑	




特点：可倒置隐藏安装在运动部件底面且结构紧凑，不会对结构的美观性造成影响。

直线导轨
E3


方型限位块(无孔)
ICR61

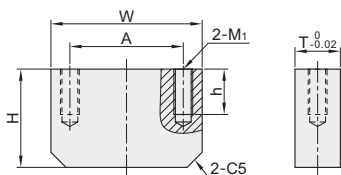


方型限位块(螺纹孔)
ICR64/65/66/67

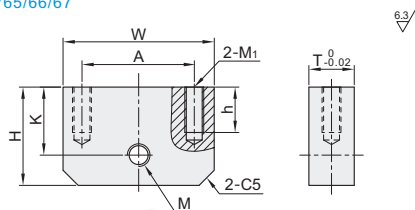

方型限位块+定位螺栓
ICR71/72

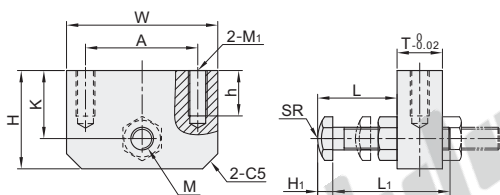

方型限位块+聚氨酯螺钉
ICR75/76

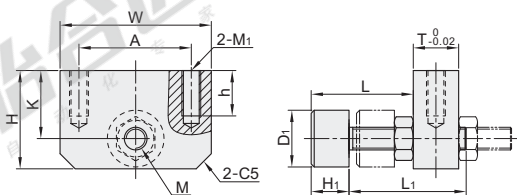

视角标准：第一视角

代码	型号 适用导轨规格	W	H	A	T	M		K	M ₁	h	L		
						粗牙	细牙				ICR71/72	ICR75/76	
单件	15A	40	15	30	12	M6×1.0	M6×0.75	8	M5	12	7~22	11~23	
	15B		23										
	ICR64	20A	18	30	12	M6×1.0	M6×0.75	10	M5	12	7~22	11~23	
	ICR65		26										
	ICR67		20B										26
组件	25A	40	23	30	16	M6×1.0	M6×0.75	15	M6	12	7~22	11~23	
	ICR71		25B										35
	ICR75	30B	50	41	35	16	M8×1.25	M8×1.0	33	M8	16	10~28	14~31
	ICR72	35B	50	47	35	16	M8×1.25	M8×1.0	40	M8	16	10~28	14~31
	ICR76												

代码	型号 适用导轨规格	L ₁		H ₁		SR	D ₁	匹配导轨 宽度系列	适用怡合达 导轨型号	
		ICR71/72	ICR75/76	ICR71/72	ICR75/76					
单件	15A	30	25	4	10	4	15	微型15系列	IAC/IAF-H16 IAJ/IAM-H16	
	15B									
	ICR64	20A	25	4	10	4	15	微型20系列	IBJ-H24 IBC-H28	
	ICR65									
	ICR67									
组件	25A	30	25	4	10	4	15	微型25系列	—	
	ICR71									25B
	ICR75	30B	35	30	5.5	13	5.5	20	重载30系列	IBJ/IBP-H42 IBC/IBF-H45
	ICR72	35B	35	30	5.5	13	5.5	20	重载35系列	—
	ICR76									

请按图示订货

代码	型号 适用导轨规格
ICR61	15A
ICR64	15B
ICR61	20A

优惠价	
数量	1~9 10~
价格	100% 另行报价

交货期
7

ICR61 — 20A