


带座轴承

单轴承T型 圆角型



轴承精度: JIS B 1514 0 级

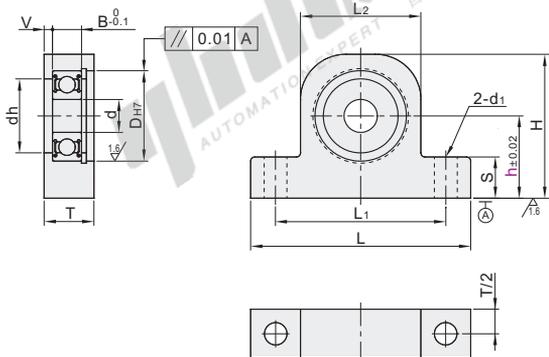

视角标准: 第一视角

型号		密封圈	h	d	D _{H7}	dh	B	V	H	L	L ₁	L ₂	T	S	d ₁	基本额定负载		容许转速 rpm (参考)
代码	轴承型号															Cr(动) KN	Cor(静) KN	
BHJ01	608		20	8		18	7		35	53	41	29		9.8		3.35	1.4	32000
			40															
			45															
	6900			20	10	22	19	6		35	58	46	34	9.8		2.7	1.27	30000
				40														
				45														
	6901			20	12	24	21	6		37	58	46	34	9.8	5.3	2.89	1.46	27000
				40														
				47														
	6000			20	10	26	22	8		37	58	46	34	9.8		4.55	1.96	29000
				40														
				47														
	6001	ZZ (双盖式)		20	12	24	24	2		40	58	46	34	9.8		5.1	2.39	26000
				30														
				60														
	6902			20	15		25	7		50	58	46	34	14.8	6.3	3.65	2	24000
				40														
				70														
	6200			20	10	30	24	9		40	68	54	40	9.8	5.3	5.1	2.39	25000
				30														
60																		
6201			20	12		26	10		40	68	54	40	9.8	5.3	6.1	2.75	22000	
			30															
			60															
6002			20	15	32	28	9		50	68	54	40	14.8	6.3	5.6	2.83	22000	
			30															
			60															

① 请注意避让挡圈，挡圈尺寸请参考P694。



型号		密封圈	h
代码	轴承型号		
BHJ01	608	ZZ (双盖式)	20
			25
			30

BHJ01 — 608ZZ — h20



● 优惠价
数量 | 1~9 | 10~
价格 | 100% | 另行报价



交货期
5