




| 代码    | 材质      |     |       | 推荐使用温度      |
|-------|---------|-----|-------|-------------|
|       | 套圈      | 保持架 | 球体    |             |
| BAX01 | UHMW-PE |     | 碳酸钠玻璃 | -50°C~60°C  |
| BAX02 | PTFE    |     | 氧化铝陶瓷 | -40°C~150°C |
| BAX03 | PEEK    |     | 氧化铝陶瓷 | -50°C~180°C |

安装图

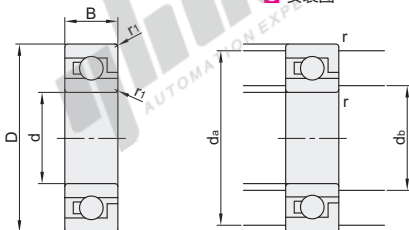

视角标准：第一视角

| 代码                      | 型号       | d  | D  | B   | r1  | 安装尺寸    |         |        | 参考重量(g) |       |       |
|-------------------------|----------|----|----|-----|-----|---------|---------|--------|---------|-------|-------|
|                         |          |    |    |     |     | da(min) | da(max) | r(max) | BAX01   | BAX02 | BAX03 |
| BAX01<br>BAX02<br>BAX03 | 624-2RS  | 4  | 13 |     | 0.2 | 5.6     | 11.4    | 0.2    | 0.55    | 1.5   | 0.9   |
|                         | 625-2RS  | 5  | 16 | 5   | 0.3 | 7       | 14      | 0.3    | 0.9     | 1.9   | 1.3   |
|                         | 605-2RS  |    | 14 |     | 0.2 | 6.6     | 12.4    | 0.2    | 0.65    | 1.6   | 1     |
|                         | 626-2RS  |    | 19 |     | 0.3 | 8       | 17      | 0.3    | 1.5     | 3.1   | 2     |
|                         | 606-2RS  | 6  | 17 |     |     | 15      | 15      |        | 1.2     | 2.8   | 1.6   |
|                         | 696-2RS  |    | 15 | 5   | 0.2 | 7.6     | 13.4    | 0.2    | 0.75    | 2.4   | 1.2   |
|                         | 628-2RS  |    | 24 | 8   |     | 22      | 22      |        | 3.2     | 6.7   | 4.4   |
|                         | 608-2RS  | 8  | 22 | 7   | 0.3 | 10      | 20      | 0.3    | 2.4     | 6     | 3.6   |
|                         | 698-2RS  |    | 19 | 6   |     | 17      | 17      |        | 1.3     | 5     | 2.6   |
|                         | 6200-2RS |    | 30 | 9   | 0.6 | 14      | 26      | 0.6    | 5.6     | 9     | 3.2   |
|                         | 6000-2RS | 10 | 26 | 8   |     | 24      | 24      |        | 3.5     | 7.7   | 5.1   |
|                         | 6900-2RS |    | 22 | 6   | 0.3 | 12      | 20      | 0.3    | 1.9     | 6.5   | 4     |
|                         | 6201-2RS |    | 32 | 10  | 0.6 | 16      | 28      | 0.6    | 7       | 11.5  | 8.6   |
|                         | 6001-2RS | 12 | 28 | 8   |     | 26      | 26      |        | 4       | 8.5   | 5.6   |
|                         | 6901-2RS |    | 24 | 6   | 0.3 | 14      | 22      | 0.3    | 1.9     | 5.5   | 3.6   |
|                         | 6202-2RS |    | 35 | 11  | 0.6 | 19      | 31      | 0.6    | 8.8     | 14    | 11.8  |
|                         | 6002-2RS | 15 | 32 | 9   | 0.3 | 17      | 30      | 0.3    | 5.7     | 11    | 7.8   |
|                         | 6902-2RS |    | 28 | 7   | 0.3 | 17      | 26      | 0.3    | 3       | 9     | 6.8   |
|                         | 6203-2RS |    | 40 | 12  | 0.6 | 21      | 36      | 0.6    | 12.8    | 10.5  | 8     |
|                         | 6003-2RS | 17 | 35 | 10  |     | 33      | 33      |        | 7.3     | 14.2  | 9.4   |
| 6903-2RS                |          | 30 | 7  | 0.3 | 19  | 28      | 0.3     | 3.3    | 10.2    | 5.5   |       |
| 6204-2RS                |          | 47 | 14 | 1   | 25  | 42      | 1       | 20     | 32      | 24    |       |
| 6004-2RS                | 20       | 42 | 12 | 0.6 | 22  | 38      | 0.6     | 12.6   | 24.6    | 16.2  |       |
| 6904-2RS                |          | 37 | 9  | 0.3 | 22  | 35      | 0.3     | 6.8    | 18.5    | 10.5  |       |



请按图示订货

| 型号    |         | d | D  | B |
|-------|---------|---|----|---|
| 代码    | 轴承型号    |   |    |   |
| BAX01 | 624-2RS | 4 | 13 | 5 |
| BAX02 | 625-2RS | 5 | 16 | 5 |

BAX01—624-2RS



未税价(元)

优惠价

| 数量 | 1~19 | 20~  |
|----|------|------|
| 价格 | 100% | 另行报价 |



交货期

7