




推力球轴承

● 推力球轴承

代码	轴承类型 代码	轴承精度	轴承材质	
			国标	相当
BBM	5	GB/T 307.1 6级	GCr15	SUJ2

① 两侧滚道圈和保持器为可拆解结构，打开包装时请注意。



视角标准：第一视角

型号	d		D		D ₁ min		T	r ₁ min	基本额定负载		容许 转速 rpm (参考)	安装尺寸			重量(g) (参考)
									Ca(动) KN	C _{0a} (静) KN		d _b min	d _a max	r max	
BBM51100	10		24		11	9		0.3	10.1	14	6700	18	16	0.3	19
BBM51200			26		12	11		0.6	12.8	17.1	6000	20		0.6	28
BBM51101	12		28	0 -0.013	13	9		0.3	10.4	15.4	6700	22	18	0.3	21
BBM51201			28		14	11		0.6	13.3	19	5600			0.6	31
BBM51102	15	0 -0.008	32		16	9		0.3	10.6	16.8	6300	23	20	0.3	23
BBM51202			32		17	12		0.6	16.7	24.8	5000	25	22	0.6	43
BBM51103	17		30		18	9	0 -0.075	0.3	11.4	19.5	6000			0.3	25
BBM51203			35		19	12		0.6	17.3	27.3	4800	28	24	0.6	50
BBM51104	20		40	0 -0.016	21	10		0.3	15.1	26.6	5300	29	26	0.3	37
BBM51204			40		22	14			22.5	37.5	4300	32	28		77
BBM51105	25	0 -0.010	42		26	11		0.6	19.7	37	4800	35	32	0.6	56
BBM51205			47		27	15			28	50.5	3800	38	34		111
BBM51106	30		52	0 -0.019	32	11			20.6	42	4300	40	37		64
BBM51206			52		32	16			29.5	58	3400	43	39		137

① 1Kgf=9.81N



请按图示订货

型号	d
BBM51100	10
BBM51200	12
BBM51101	12
BBM51100	



未税价(元)


优惠价	数量	1~9	10~
数量	1~9		
价格	100%	另行报价	



交货期
3



Example
使用示例

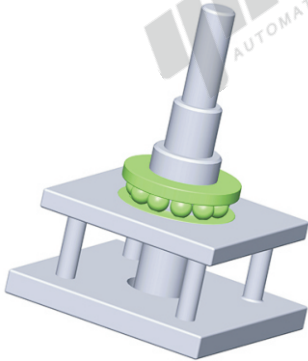

① 通过推力球轴承支撑传送工件，轴承的轴圈、座圈和滚动体是分离的，可以分别装拆，主要用于转速较低的机件上。

关节轴承

E7