




交叉滚子轴承

◀ 内环分割型


代码	类型	后置代码	轴承游隙	轴承精度	轴承材质	
					国标	相当
RE	内环分割型	UU(两端密封垫片)	CC0	P5	GCr15	SUJ2



■ 安装图

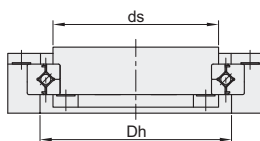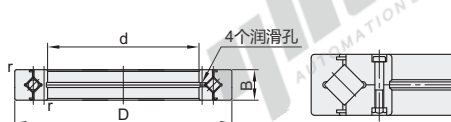

■ 润滑孔的详细视图



视角标准：第一视角

型号	主要尺寸						肩部尺寸		基本额定负载(径向)		参考重量 (kg)
	d	D	B	r (min)	润滑孔		ds (max)	Dh (min)	Cr(动) KN	Co(静) KN	
					a	b					
RE10016UUC0P5	100	140	16	1	3	1.6	109	131	31.7	48.6	0.83
RE10020UUC0P5		150	20		3.5		115	137	33.1	50.9	1.45
RE11012UUC0P5	110	135	12	0.6	2.5	1	117	128	12.5	24.1	0.4
RE11015UUC0P5		145	15		3		122	136	23.7	41.5	0.75
RE11020UUC0P5	120	160	20	1	3.5	1.6	125	147	34	54	1.56
RE12016UUC0P5		150	16		0.6		3	127	143	24.2	43.2
RE12025UUC0P5	130	180	25	1.5	3.5	2	135	166	66.9	100	2.62
RE13015UUC0P5		160	15		0.6		3	1.6	137	153	25
RE13025UUC0P5	140	190	25	1.5	3.5	2	145	176	69.5	107	2.82
RE14016UUC0P5		175	16		1		3	1.6	151	167	25.9
RE14025UUC0P5	150	200	25	1.5	3.5	2	154	186	74.8	121	2.96
RE15013UUC0P5		180	13		0.6		2.5	1.6	158	173	27
RE15025UUC0P5	160	210	25	1.5	3.5	2	164	196	76.8	128	3.16
RE15030UUC0P5		230	30		4.5		3	173	210	100	156
RE16025UUC0P5	170	220	25	1	3.5	2	174	206	81.7	135	3.14
RE17020UUC0P5	180	240	20		1.6		187	204	29	62.1	2.21
RE18025UUC0P5	190	260	30	2	4.5	3	221	258	114	200	6.7
RE19025UUC0P5		280	35		5		225	270	151	252	9.6
RE20025UUC0P5	200	295	40	2.5	3.5	1.6	235	265	92.3	171	4.1
RE20030UUC0P5		310	45		5		238	275	155	255	9.6
RE20035UUC0P5	220	330	45	2.5	3.5	1.6	258	284	68.3	145	4.5
RE22025UUC0P5		360	50		5		268	293	69.3	150	5
RE24025UUC0P5	240	390	50	2.5	3.5	1.6	305	336	74.1	155	4.9
RE25025UUC0P5		420	55		5		3	422	459	156	370
RE35020UUC0P5	350	480	60	3	6	3.5	428	479	241	531	23.5
RE40035UUC0P5		510	65		6		3.5	515	536	65.5	201
RE40040UUC0P5	400	550	65	3	6	3.5	526	572	239	607	26
RE50025UUC0P5		600	70		6		3.5	536	587	267	653
RE50040UUC0P5	500	625	70	3	6	3.5	547	593	249	621	27
RE50050UUC0P5		650	75		6		3.5	558	609	261	635
RE60040UUC0P5	600	700	70	4	7	4	627	673	264	721	29



请按图示订货

型号	d	D
RE10016UUC0P5	100	140
RE10020UUC0P5	100	150

RE10016UUC0P5



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

6