


品牌	轴承类型 代码	轴承精度	轴承游隙	后置代码	轴承材质	
					国标	相当
HRB	6	P0	标准游隙(C0)	未标注: 钢 TN: 尼龙 M: 黄铜	GCr15	SUJ2



出厂前未封入润滑脂, 请在使用前封入。

安装图

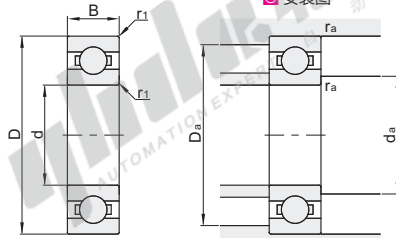

视角标准: 第一视角

型号	d	D	B	r1 (min)	额定载荷(KN)		极限转速(r/min)		安装尺寸			重量(kg) 参考		
					Cr(动)	Cor(静)	脂润滑	油润滑	da(min)	Da(max)	ra(max)			
607-HRB	7	19	6		2.24	0.89	38000	45000	9	17		0.01		
627-HRB		22	7		3.28	1.36	32000	38000		20				
608-HRB		8	24		8	3.32	1.43	36000		43000			10	
628-HRB	26		8	4.55	1.96	30000	36000	9.3	21	0.3	0.02			
629-HRB	9	26	8	4.55	1.96	28000	34000	11	24					
61800TN-HRB		10	19	5	1.83	0.92	36000	43000	17	17	0.6	0.01		
61900-HRB	22		6	1.95	0.75	34000	40000	12	20					
6000-HRB	10	26	8	4.59	1.97	30000	36000	24	24	0.3	0.02			
6200-HRB		30	9	5.1	2.39	24000	30000	26	26			0.6	0.03	
6300-HRB		35	11	7.66	3.47	20000	26000	31	31					0.6
61801TN-HRB	12	21	5	1.91	1.04	32000	38000	19	19	0.3	0.01			
61901-HRB		24	6	2.25	0.98	30000	36000	14	22					
6001-HRB	12	28	8	5.1	2.39	26000	32000	26	26	0.6	0.02			
16001-HRB		30	8	5.1	2.39	26000	32000	26	26					
6201-HRB		32	10	6.76	3.05	22000	28000	16	28			0.3	0.04	
6301-HRB	37	12	8.58	3.92	19000	24000	32	1	0.6	0.06				
61802TN-HRB	15	24	5	2.08	1.26	28000	34000	22			22	0.3	0.01	
61902-HRB		28	7	4.33	2.25	24000	30000	17	26					
16002-HRB	15	8	8	4.33	2.25	24000	30000	17	26	0.3	0.02			
6002-HRB		32	9	5.62	2.84	22000	28000	30	30			0.6	0.03	
6202-HRB		35	11	7.66	3.72	19000	24000	19	31					
6302-HRB	17	42	13	11.4	5.4	17000	20000	20	37	1	0.05			
61803TN-HRB		26	5	2.22	1.46	24000	30000	24	24	1	0.08			
61903-HRB	17	30	7	4.6	2.55	22000	28000	19	28	0.3	0.01			
16003-HRB		35	8	6.5	3.36	19000	24000	33	33			0.6	0.02	
6003-HRB	17	40	12	10.3	4.79	17000	20000	21	36	1	0.03			
6203-HRB		47	14	13.5	6.55	16000	19000	22	42			0.6	0.06	
6303-HRB		62	17	22.9	10.8	12000	15000	23.5	55.5					1
6403-HRB	20	32	7	3.48	2.23	19000	24000	30	30	0.3	0.02			
61804TN-HRB		37	9	6.38	3.65	18000	22000	22	35			0.6	0.04	
61904-HRB	20	42	8	7.9	4.45	17000	20000	24	40	0.3	0.05			
16004-HRB		47	12	9.44	5.03	17000	20000	24	38			0.6	0.07	
6004-HRB		52	15	16	7.88	13000	16000	26.5	45.5					1
6204-HRB	25	72	19	31.1	15.2	10000	13000	65.5	65.5	0.4	0.4			
6304-HRB		37	7	3.84	2.8	17000	20000	27	35			0.3	0.02	
6404-HRB	25	42	9	7.32	4.56	16000	19000	40	40	0.6	0.04			
61805TN-HRB		47	12	10.1	5.85	15000	18000	29	43			0.3	0.08	
61905-HRB		52	15	17	8.84	14000	17000	27	45					0.6
6005-HRB	30	52	15	14	7.87	12000	15000	30	47	1	0.13			
16005-HRB		62	17	22.5	11.5	11000	14000	31.5	55.5			0.3	0.23	
6205-HRB		80	21	37.3	18.8	9000	11000	33	72					1.5
6305-HRB	35	42	7	4.15	3.32	15000	18000	40	40	0.3	0.03			
6405-HRB		47	9	8.05	5.37	14000	17000	32	45			0.6	0.05	
61806TN-HRB	40	55	13	13.3	8.36	12000	15000	35	50	1	0.12			
61906-HRB		62	16	19.5	11.3	10000	13000	35	57			0.3	0.09	
6006-HRB		72	19	26.7	14.9	9000	11000	36.5	65.5					1
16006-HRB	45	90	23	47.3	24.5	8500	10000	38	82	1.5	0.73			
6206-HRB		47	7	0.3	4.29	3.6	13000	16000	37			45	0.3	0.03
6306-HRB	50	55	10	9.54	6.83	11000	14000	39	51	0.6	0.08			
6406-HRB		62	14	1	16	10.3	10000	13000	40			57	1	0.15
61807TN-HRB	55	62	9	0.3	13.1	9.12	10000	13000	37	60	0.3	0.11		
61907-HRB		72	17	1.1	25.6	15.5	9000	11000	41.5	65.5			1	0.29
6007-HRB		80	21	1.5	33.4	19.2	8500	10000	43	72				
16007-HRB	60	100	25	55.3	31	7000	8500	43	92	1.5	0.93			
6207-HRB		60	52	7	0.3	4.52	4.1	11000	14000			42	50	0.3
6307-HRB	62		12	0.6	12.2	8.9	10000	13000	44	58	0.6	0.11		
6407-HRB	70	68	15	1	16.8	11.6	9500	12000	45	63			1	0.19
61808TN-HRB		80	9	0.6	13.5	10	8500	10000	42	66	0.3	0.13		
61908-HRB		90	18	1.1	27.6	17.4	8500	10000	46.5	73.5				
6008-HRB	80	90	23	1.5	40.8	24	7500	9000	48	82	1.5	0.64		
6208-HRB		110	27	2	63.8	36.6	6700	8000	49	101			2	1.24
6308-HRB														
6408-HRB														

- 总目录
- 目录
- 使用说明
- 螺钉
- 螺栓
- 螺柱
- 铆接类
- 组合件
- 螺母
- 垫圈
- 挡圈
- 树脂类
- 带挡块
- 螺钉
- 柱塞
- 紧固件
- 进口专区
- 紧固件
- 专用配件
- 经济型
- 轴承
- 标准型
- 轴承
- 进口型
- 轴承
- 品牌轴承
- 带座轴承
- 吊环
- 索具
- 电子焊接
- 工具
- 手动工具
- 电动工具
- 气动工具
- 储存工具
- 量具
- 刀具
- 技术资料

型号	d	D	B	r ₁ (min)	额定载荷(KN)		极限转速(r/min)		安装尺寸			重量(kg) 参考
					Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	D _a (max)	r _a (max)	
61909-HRB	45	68	12	0.6	14.2	10.9	9000	11000	49	64	0.6	0.13
6009-HRB		16	1	19.9	14	50			70	1	0.24	
16009-HRB		75	10	0.6	15.6	12.2	49	71	0.6	0.17		
6209-HRB		85	19	1.1	31.2	20.4	7500	9000	51.5	78.5	1	0.42
6309-HRB		100	25	1.5	48.9	29.3	6700	8000	53	92	1.5	0.85
6409-HRB		120	29	2	72.9	42.6	6000	7000	54	111	2	1.56
61910-HRB	50	72	12	0.6	14.6	11.7	8500	10000	54	68	0.6	0.14
6010-HRB		16	1	20.7	15.4	55			75	1	0.26	
16010-HRB		80	10	0.6	16.1	13.11	54	76	0.6	0.18		
6210-HRB		90	20	1.1	35.1	23.2	7000	8500	56.5	83.5	1	0.47
6310-HRB		110	27	2	57.6	35.3	6300	7500	59	101	2	1.1
6410-HRB		130	31	2.1	83.3	49.3	5300	6300	61	119	2	1.92
61811TN-HRB	55	72	9	0.3	9.07	8.45	8500	10000	57	70	0.3	0.08
61911-HRB		80	13	1	18.9	15.1	8000	9500	60	75	1	0.18
6011-HRB		90	18	1.1	26.7	20.1	7500	9000	61.5	83.5	1	0.38
16011-HRB		100	11	0.6	19.1	16.2	59	86	0.6	0.27		
6211-HRB		100	21	1.5	43.4	29.2	6300	7500	63	92	1.5	0.61
6311-HRB		120	29	2	71.6	44.8	5600	6700	64	111	2	1.35
6411-HRB	140	33	2.1	101	62.3	5000	6000	66	129	2	2.3	
61812-HRB	60	78	10	0.3	10.3	9.91	7500	9000	62	76	0.3	0.1
61812TN-HRB		10	0.3	10.3	9.91	62			76	0.3	0.1	
61912-HRB		85	13	1	19.4	16.2	65	80	1	0.19		
6012-HRB		95	18	1.1	30.2	23	6700	8000	66.5	88.5	1	0.4
16012-HRB		110	11	0.6	19.9	17.5	64	91	0.6	0.29		
6212-HRB		110	22	1.5	47.8	32.9	6000	7000	68	102	1.5	0.8
6312-HRB	130	31	2.1	81.9	51.8	5000	6000	71	119	2	1.71	
6412-HRB	150	35	2.1	109	70.1	4800	5600	71	139	2	2.78	
61813-HRB	65	85	10	0.6	10.8	10.7	7000	8500	69	81	0.6	0.13
61813TN-HRB		10	0.6	10.8	10.7	69	81	0.6	0.13			
61913-HRB		90	13	1	19.9	17.5	6700	8000	70	85	1	0.21
6013-HRB		100	18	1.1	31.9	24.9	6300	7500	71.5	93.5	1	0.42
16013-HRB		110	11	0.6	20.7	18.6	69	96	0.6	0.3		
6213-HRB		120	23	1.5	50.7	37.1	5300	6300	73	112	1.5	1.04
6313-HRB	140	33	2.1	92.8	59.7	4800	5600	76	129	2	2.11	
6413-HRB	160	37	2.1	118	78.6	4500	5300	76	149	2	3.36	
61814-HRB	70	90	10	0.6	11.2	11.5	6700	8000	74	86	0.6	0.14
61814TN-HRB		10	0.6	11.2	11.5	74	86	0.6	0.14			
61914-HRB		100	16	1	23.7	21.1	6300	7500	75	95	1	0.34
6014-HRB		110	20	1.1	38.7	30.4	6000	7000	76.5	103.5	1	0.59
16014-HRB		120	13	0.6	24.3	22.5	64	106	0.6	0.45		
6214-HRB		125	24	1.5	55.8	41.1	5000	6000	78	117	1.5	1.12
6314-HRB	150	35	2.1	104	68	4500	5300	81	139	2	2.55	
6414-HRB	180	42	3	135	96.2	3800	4500	83	167	2.5	4.95	
61815-HRB	75	95	10	0.6	11.3	11.9	6300	7500	79	91	0.6	0.14
61815TN-HRB		10	0.6	11.3	11.9	79	91	0.6	0.14			
61915-HRB		105	16	1	23.4	22.5	6000	7000	80	100	1	0.36
6015-HRB		115	20	1.1	40.3	33.2	5600	6700	81.5	108.5	1	0.62
16015-HRB		130	13	0.6	25	23.9	79	111	0.6	0.47		
6215-HRB		130	25	1.5	60.8	45.4	4800	5600	83	122	1.5	1.2
6315-HRB	160	37	2.1	113	77	4300	5000	86	149	2	3.05	
6415-HRB	190	45	3	153	114	3600	4300	88	177	2.5	6.8	
61816-HRB	80	100	10	0.6	11.6	12.7	6000	7000	84	96	0.6	0.15
61816TN-HRB		10	0.6	11.6	12.7	84	96	0.6	0.15			
61916-HRB		110	16	1	25	23.9	5600	6700	85	105	1	0.38
6016-HRB		125	22	1.1	42.4	35.6	6000	7000	86.5	118.5	1	0.86
16016-HRB		140	14	0.6	31.9	29.7	5300	6300	84	121	0.6	0.61
6216-HRB		140	26	2	71.5	54.3	4500	5300	89	131	2	1.45
6316-HRB	170	39	2.1	123	86.5	3800	4500	91	159	2	3.61	
6416-HRB	200	48	3	163	125	3400	4000	93	187	2.5	8	
61817-HRB	85	110	13	1	16	16.8	5300	6300	90	105	1	0.27
61817TN-HRB		13	1	16	16.8	90			105	1	0.27	
61917-HRB		120	18	1.1	31.9	29.7	5000	6000	91.5	113.5	1	0.53
6017-HRB		130	22	1.1	47.3	40.1	5000	6000	91.5	123.5	1	0.88
16017-HRB		140	14	0.6	32.8	31.5	89	126	0.6	0.63		
6217-HRB		150	28	2	77.2	59.3	4300	5000	94	141	2	1.83
6317-HRB	180	41	3	133	96.6	3600	4300	98	167	2.5	4.3	
6417-HRB	210	52	4	174	137	3200	3800	101	194	3	9.5	
61818-HRB	90	115	13	1	16.5	18	5300	6300	95	110	1	0.28
61818TN-HRB		13	1	16.5	18	95	110	1	0.28			
61918-HRB		125	18	1.1	32.8	31.5	5000	6000	96.5	118.5	1	0.56
6018-HRB		140	24	1.5	52.3	45.1	4800	5600	98	132	1.5	1.16
16018-HRB		160	16	1	42.5	39.2	4800	5600	95	135	1	0.85
6218-HRB		160	30	2	96.1	71.5	3800	4500	99	151	2	2.18
6318-HRB	190	43	3	143	107	3400	4000	103	177	2.5	5	
61819TN-HRB	95	120	13	1	18.6	18.6	5000	6000	100	115	1	0.3
61919-HRB		130	18	1.1	33.7	33.3	4800	5600	101.5	123.5	1	0.59
6019-HRB		145	24	1.5	58	50.1	4500	5300	103	137	1.5	1.18
16019-HRB		160	16	1	43.9	42	4500	5300	100	140	1	0.88
6219-HRB		170	32	2.1	109	81.7	3600	4300	106	159	2	2.64
6319-HRB		200	45	3	153	118	3200	3800	108	187	2.5	5.78
61820-HRB	100	125	13	1	16.9	19.1	4800	5600	105	120	1	0.31
61820TN-HRB		13	1	16.9	19.1	105	120	1	0.31			
61920-HRB	140	20	1.1	43.9	42	4500	5300	106.5	133.5	1	0.79	

总目录
目录
使用说明
螺钉
螺栓
螺柱
铆接类
组合件
螺母
垫圈
挡圈
树脂类
带挡块
螺钉
柱塞
紧固件
进口专区
紧固件
专用配件
经济型
轴承
标准型
轴承
进口型
轴承
品牌轴承
带座轴承
吊环
索具
电子焊接
工具
手动工具
电动工具
气动工具
储存工具
量具
刀具
技术资料

型号	d	D	B	r ₁ (min)	额定载荷(KN)		极限转速(r/min)		安装尺寸			重量(kg) 参考	
					Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	D _a (max)	r _a (max)		
6020-HRB	100	150	24	1.1	63.7	50.4	4300	5000	108	142	1.5	1.22	
16020-HRB			16	1	46.3	44.8			105	145	1	0.91	
6220-HRB		180	34	2.1	122	92.7	3400	4000	111	169	2	3.15	
6320-HRB		215	47	3	173	140	3000	3600	113	202	2.5	7.11	
6420-HRB		250	58	4	224	195	2900	3400	118	232	3	12.8	
61821-HRB	105	130	13	1	17.4	20.4	4500	5300	110	125	1	0.32	
61821TN-HRB													
61921-HRB		145	20	1.1	46.3	44.8	4300	5000	111.5	138.5	1	0.81	
6021-HRB		160	26	2	69.8	61.2	4000	4800	114	151	2	1.56	
16021-HRB		18	1	52	51	110			155	1	1.2		
6221-HRB	190	36	2.1	133	104	3200	3800	116	179	2	3.82		
6321-HRB	225	49	3	182	153	2800	3400	118	212	2.5	8.25		
61822TN-HRB	110	140	16	1	24.3	27.2	4300	5000	115	135	1	0.5	
61922-HRB			150	20	1.1	47.8			47.7	4000	4800	116.5	143.5
6022-HRB		170	28	2	75.1	67.3	3800	4500	119	161	2	1.96	
16022-HRB		19	1	57.2	57	115			165	1	1.45		
6222-HRB		200	38	2.1	144	117	3000	3600	121	189	2	4.45	
6322-HRB	240	50	3	203	180	2600	3200	123	227	2.5	9.55		
61824TN-HRB	120	150	16	1	25	26	3800	4500	125	145	1	0.54	
61924-HRB			165	22	1.1	57.2			56.9	3600	4300	126.5	158.5
6024-HRB		180	28	2	88.3	79.7	3400	4000	129	171	2	2.05	
16024-HRB		19	1	60.5	64	125			175	1	1.6		
6224-HRB		215	40	2.1	156	131	2800	3400	131	204	2	5.3	
6324-HRB	260	55	3	208	186	2400	3000	133	247	2.5	14.5		
61926-HRB	130	180	24	1.5	69.4	70	3400	4000	138	172	1.5	1.51	
6026-HRB			200	33	2	102			93.9	3200	3800	139	191
16026-HRB		22	1.1	79.3	81.5	136.5	193.5	1	2.42				
6226-HRB		230	40	3	166	148	2600	3200	143	217	2.5	6.14	
6326-HRB		280	58	4	229	216	2200	2800	146	264	3	18	
61828M-HRB	140	175	18	1.1	34	38.5	3400	4000	146.5	168.5	1	0.93	
61928-HRB			190	24	1.5	71.2			74.6	3200	3800	148	182
6028-HRB		210	33	2	115	109	3000	3600	149	201	2	3.25	
16028-HRB		22	1.1	80.6	86.5	146.5			203.5	1	3.08		
6228-HRB		250	42	3	165	150	2400	3000	153	237	2.5	7.45	
6328-HRB	300	62	4	251	245	2000	2600	156	284	3	22		
61930-HRB	150	210	28	2	88.4	93	2800	3400	159	201	2	3.05	
61930M-HRB													
6030-HRB		225	35	2.1	125	125	2600	3200	161	214	1	4.8	
16030-HRB		24	1.1	92.3	98	156.5			218.5	1	3.15		
6230-HRB		270	45	3	174	166	2000	2600	163	257	2.5	9.4	
6330-HRB	320	65	4	276	285	1900	2400	166	304	3	26		
61932-HRB	160	220	28	2	92.3	98	2600	3200	169	211	2	3.25	
61932M-HRB													
6032-HRB		240	38	2.1	143	143	2400	3000	171	229	2	5.9	
16032-HRB		25	1.5	99.5	108	168			232	1.5	3.7		
6232-HRB		290	48	3	186	186	1900	2400	173	277	2.5	14.5	
6332-HRB	340	68	4	312	285	1800	2200	176	324	3	29		
6332M-HRB											31.1		
61834M-HRB	170	215	22	1.1	54	58.5	2600	3200	176.5	208.5	1	1.87	
61934-HRB			230	28	2	93.6			106	2400	3000	179	221
6034-HRB		260	42	2.1	168	173	2200	2800	181	249	2	7.9	
6034M-HRB													
16034M-HRB		28	1.5	119	129	178	252	1.5	5.83				
6234-HRB	310	52	4	312	224	1900	2400	186	294	3	17.5		
6334-HRB	360	72	4	312	340	1700	2000	186	344	3	34.5		
6036-HRB	180	280	46	2.1	190	200	2000	2600	191	269	2	10.5	
16036-HRB			31	2	138	146			189	271	2	6.6	
6236-HRB		320	52	4	229	240	1800	2200	196	304	3	18.5	
6038-HRB		290	46	2.1	195	216	2000	2600	201	279	2	11	
16038M-HRB		31	2	148	166	199			281	2	8.11		
6238-HRB	340	55	4	255	280	1700	2000	206	324	3	23		
61940-HRB	190	280	38	2.1	148	106	2000	2600	211	269	1	7.4	
61940M-HRB													
6040-HRB		310	51	4	216	245	1900	2400	211	299	2	14	
16040-HRB													
16040M-HRB		34	2	168	190	209	301	1	10.3				
6240-HRB	200	360	58	4	270	310	1700	2000	216	344	3	28	
6240M-HRB													
61844M-HRB		270	24	1.5	78	110	1900	2400	228	262	1.5	3	
6044-HRB		220	340	56	3	247	290	1800	2200	233	327	2.5	18.5
6044M-HRB													
16044-HRB	37		2.1	174	204	231	329	2	11.5				
6244-HRB	400		65	4	296	365	1500	1800	236	384	3	37	
61948-HRB	240		320	38	2.1	159	200	1800	2200	251	309	2	8.6
61948M-HRB													
6052M-HRB		260	400	65	4	291	375	1500	1800	276	384	3	29.8
61856M-HRB		280	350	33	2	138	200	1600	1900	289	341	1	7.4
61864M-HRB		320	400	38	2.1	172	255	1300	1600	311	389	2	11

- 总目录
- 目录
- 使用说明
- 螺钉
- 螺栓
- 螺柱
- 铆接类
- 组合件
- 螺母
- 垫圈
- 挡圈
- 树脂类
- 带挡块
- 螺钉
- 柱塞
- 紧固件进口专区
- 紧固件专用配件
- 经济型轴承
- 标准型轴承
- 进口型轴承
- 品牌轴承
- 带座轴承
- 吊环
- 索具
- 电子焊接工具
- 手动工具
- 电动工具
- 气动工具
- 储存工具
- 量具
- 刀具
- 技术资料



型号
607-HRB
627-HRB



优惠价
数量 1~29 30~
价格 100% 另行报价

交货期
7

1Kg=9.81N