



代码	类型	安装方式	材质	表面处理
QCH01	双槽型	弹簧压入式	钢制	镀锌
QCH02			不锈钢	—
QCH11		内螺纹型	钢制	镀锌
QCH12			不锈钢	—
QCH21	双链轮型	内螺纹型	钢制	镀锌
QCH22			SUS304	—

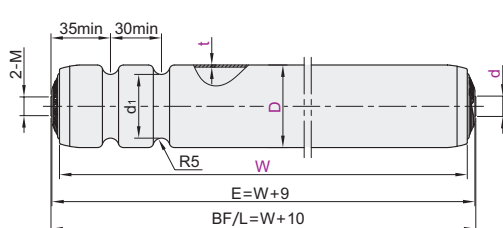


双槽型-弹簧压入式
QCH01
QCH02

双槽型-内螺纹型
QCH11
QCH12

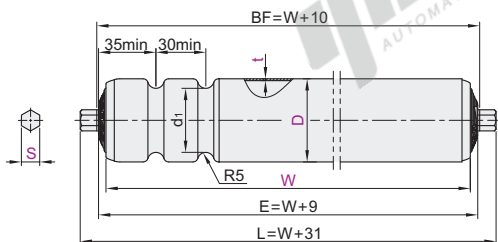

□ S=12时，辊轴是圆轴，圆轴Ø12mm。

双链轮型-内螺纹型
QCH21
QCH22

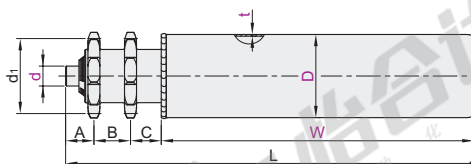

视角标准：第一视角

□ 双槽型-弹簧压入式

型号		W	t	S	BF	E	L	d ₁
代码	D							
QCH01	48	140~1800	1.5	11	W+10	W+9	W+31	Ø37.5
	50	150~1800		11				Ø38.5
	60	145~1800	12	Ø48.5				
QCH02	50	150~1800	1.5	11	W+10	W+9	W+31	Ø38.5
	50	145~1800	1.5	12				Ø38.5

□ 双槽型-内螺纹型

型号		W	t	轴径 d	M	BF	E	L	d ₁
代码	D								
QCH11	48	140~1500	1.5	14	M8×15	W+10	W+9	W+10	Ø37.5
	50	135~1400		14	轴径d14: M8×15				Ø38.5
	60	140~1500	2	14 15	轴径d15: M8×15				Ø48.5
QCH12	50	135~1400	1.5		M10×20				Ø38.5

□ 双链轮型-内螺纹型

型号		W	t	轴径 d	L	M	链轮型号	A	B	C	d ₁
代码	D										
QCH21	50	150~1800	1.5	12	W+62	M8	08B11T	17	22		Ø45.08
		150~1900	2	15	W+63	M10	08B14T				Ø57.08
	60	150~2100	3	12	W+69	M12	10A13T	20	25		Ø66.34
		150~2100		15			10B15T				Ø76.35
QCH22	50	150~1800	1.5	12	W+62	M8	08B11T	17	22	18.5	Ø45.08
	60	150~1900	2	W+63	08B14T		Ø57.08				
	76	150~2600	3	20	W+69		M12				10A13T

□ 双槽型-弹簧压入式

型号	D	W	t	S
QCH01	48	140~1800	1.5	11
QCH02	50	150~1800	1.5	12

□ 双槽型-内螺纹型

型号	D	W	t	轴径 d
QCH11	48	140~1500	1.5	14
QCH12	50	135~1400	1.5	14 15



● 优惠价
数量 1~9 10~
价格 100% 另行报价



QCH01-D48-W140-t1.5-S11

QCH11-D48-W140-t1.5-d14

□ QCH01~12

□ QCH21~22