


# 圆皮带用滑轮

## 双联型

惰  
轮

F8

代码	类型	材质		表面处理
		国标	相当	
ENS51	双联型	LF2	A5052	本色阳极氧化
ENS61		0Cr18Ni9	SUS304	—

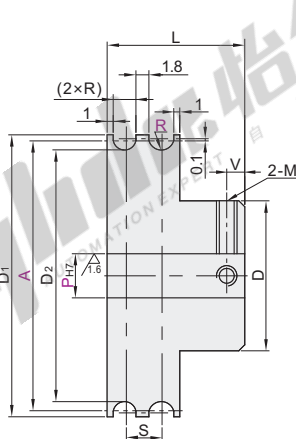

视角标准：第一视角

型号	A	R	轴孔规格-内径 P(H7)最小单位1	S	D	D1	D2	L	V	2-M (粗牙螺纹)	附件 紧定螺钉	适用 圆皮带直径	
ENS51	15		3-8		12	17	13						
	20	1.1	4-10	4	17	22	18	14				2	
	30		4-12		21	32	28						
	20		3-10		17	22	17						
	30	1.6	5-12	5	21	32	27	16	3	M3	M3×3	3	
	40					42	37						
	45		5-20		31	47	42						
	23					25	19						
	28		5-12		21	30	24	18					
	30	2.1			6	32	26						4
	40					42	36						
	45		5-18		26	47	41						
48		5-20		31	50	44	20			M4	M4×3		
ENS61	28		5-12		21	30	23		4	M3	M3×3		
	40	2.6	5-20	7	31	42	35			M4	M4×3	5	
	50					52	45	22					
	28		5-12		23	30	22		3	M3	M3×3		
	38					40	32						
	48					50	42						
	50	3.1			8	52	44	24	4	M4	M4×3	6	
	60					62	54						
	75					77	69						
	100			5-20		102	94						
	50					52	42						
	60	4.1			10	62	52	30				M5×3	8
100					102	92		5	M5				
60					62	50							
100	5.1			12	102	90	34				M5×4	10	
140					142	130							



型号	A	R	轴孔规格-内径 P(H7)最小单位1
ENS51	15	1.1	3-8
ENS61	20	1.6	4-10

ENS51 - A15 - R1.1 - P5



数量	1-9	10~
价格	100%	另行报价



5
---

怡合达  
AUTOMATION EXPERT  
自动化专家