


高品质 裸压着端子

叉形
UT系列


代码	类型	材质	表面处理	焊接方式
ZIP18	裸压着端子 叉形	紫铜	镀银	接缝焊银

特点

- 表面镀银，导电性强，防生锈，防腐蚀，抗氧化；
- 采用加厚铜片，铜片厚实，负载量大，不易发热；
- 采用优良紫铜制作，导电性好，负载量大，电阻率小，接线稳定可靠；
- 接线快速便捷，操作简单且牢固不易脱落。

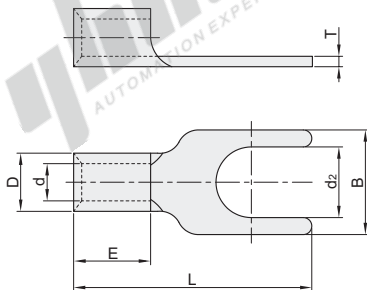

销售方式	每袋数量
袋	100PCS



视角标准：第一视角

型号		螺丝规格	适用电线规格		外形尺寸							包装 (PCS/袋)	适用 压接工具		
代码	压接规格		截面积(mm²)	AWG	d ₂	B	L	E	D	d	T				
ZIP18	1	3	0.75~1	18~17	3.2	5.6	14.4	5	3.3±0.2	1.6	0.8	100	ZIQ07-8 (见官网)		
		3					14.9								
	1.5	4	1.2~1.5	16~15	4.2	7.6	15.6		3.5±0.2	1.9					
		5			5.2	8.7	16.9								
		6			6.2	9.5	19.6								
		3			3.2	6	15.5	6	4.2±0.2	2.5	1				
	2.5	4	2~2.5	14~13	4.2	7.6	16								
		5			5.2	9	18.5								
		6			6.2	10.2	20								
		4			4.2	7.6	18	7	6.2±0.2	4.2	1.2				
	4	5	3~4	12~11	5.2	9	19								
		6			6.2	11	21.4								
		8			8.5	13.5	23								
		4			4.2	8	19.6	8.5	7.6±0.2	5.2	1.5				
	6	5	5~6	10~9	5.2	9	21								
		6			6.2	11	22.5								
		8			8.5	14	25								
		6	8~10	8~7	6.2	12	31	10.5	9.9±0.2	7	1.7				
	10	8			8.3	15	31								
		5			5.2	12	27.5								
		6			6.2	13	28								
	16	8	14~16	6~5	8.3	16	30.5	14	13±0.2	9.5					
		10			10.3	18	34								
		12			12.5	19	35								
	6			6.2	14	33									
25	8	22~25	4~3	8.3	16	35	14	13±0.2	9.5						
	10			10.3	18	36									
	12			12.5	22	42									
	8			8.3	17.5	49									
35	10	30~35	3~2	10.3	20	39	14	13±0.2	9.5						
	12			12.5	25	44									



请按图示订货

型号		螺丝规格
代码	压接规格	
ZIP18	1	3
	1.5	5

ZIP18—1—3