


代码	类型	材质	绝缘外套	表面处理	焊接方式
ZIP62	绝缘压着端子	紫铜	尼龙	镀锡	接缝焊银

特点

- 采用尼龙护套绝缘性能良好，耐久不易老化。

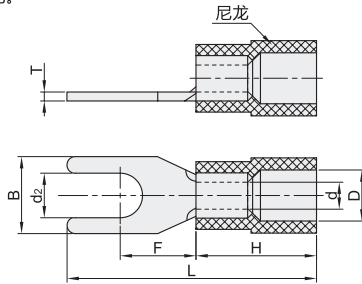

销售方式	每袋数量
袋	见参数表



型号		螺丝规格	适用电线规格		颜色	外形尺寸(mm)								最大电流 I _{max}	包装 (PCS/袋)			
代码	压接规格		截面积(mm ²)	AWG		d ₂	B	F	L	H	D	d	T					
ZIP62	1.25	3				3.2	5.7											
		3.5S				3.7												
		3.5L					6.4											
		4S																
		4M				4.3	7.2	6.5	22.2									
		4L	0.5~1.5	22~16	红		8.1			11	4.3	1.7	0.7	19A				
		5S					5.3											
		5L						9.5										
		6S																
	6L					6.4	12	11	28.2									
	8					8.4	13.5	11.5	28									
	2	3					3.2	5.7										1000
		3.5					3.7	6										
		3.5L						6.4										
		4S																
		4M				4.3	7.2	6.5	22.2									
		4L	1.5~2.5	16~14	蓝		8.1			11	4.8	2.3	0.8	27A				
		5S					5.3											
		5L						9.5										
		6S																
	6L					6.4	12	11	28.2									
	8					8.4	13.5	11.5	28									
	5.5	3.5					3.7											
		4S																
4L						4.3												
5		4~6	12~10	黄	5.3	9			13	6.7	3.4	1	48A	500				
6S						6.4												
6L							12	12	31.7									
8	8					8.4	14	11.5	30.7									
	4					4.3		7.6										
	5	6~10	8	红	5.3	9	8.1	28.3	16	8	4.5	1.2	62A	100				
14	6					6.4	12	9.2	31.3									
	4					4.3												
	5	10~16	6	蓝	5.3	9	9.5	36.5	21.5	11	5.8	1.4	88A	50				
	6					6.4	11											

压着端子



型号		
代码	压接规格	螺丝规格
ZIP62	1.25	8
	2	3

ZIP62 - 1.25 - 8

