


代码	类型	
ZJH85	区域传感器	大间距型


特点:

- 规格型号齐全, 安装方便, 接线简单;
- 完善的自检功能;
- 抗电磁、光干扰能力强;
- 抗振性强, 防水、防尘性能优越;
- LED指示工作和故障状态。

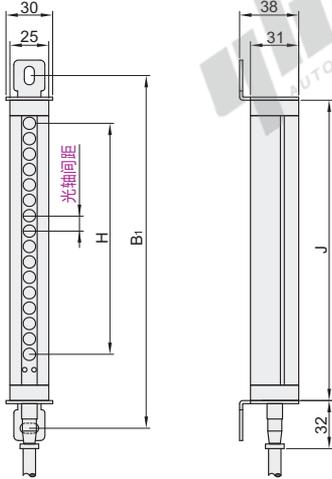


H: 保护高度
J: 光幕高度
B1: J+34mm

弯角板支架

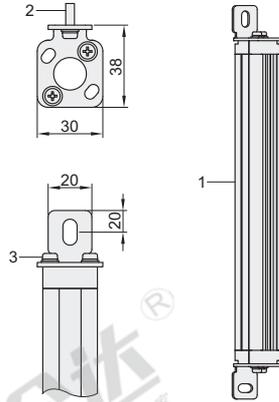


1-传感器
2-M6固定螺钉
3-M4连接螺钉

NPN双路输出接线

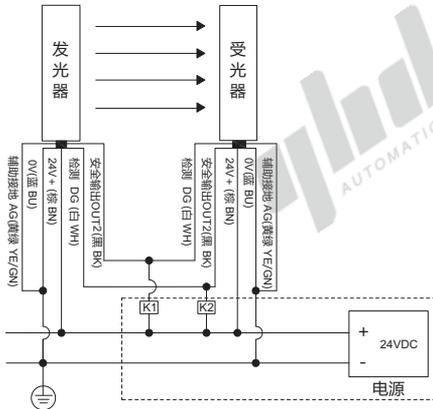

PNP双路输出接线

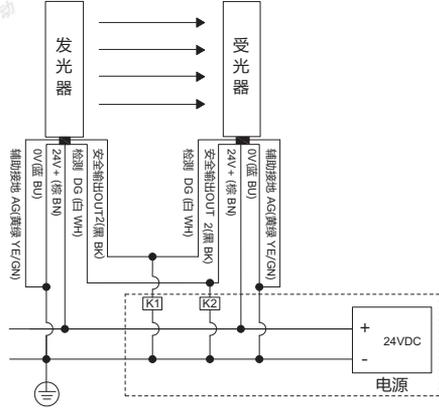

视角标准: 第一视角

代码	型号	光束数	光轴间距	输出数量	信号输出方式	检测距离(m)	H 有效保护高度	J 光幕高度
ZJH85	K10 (10mm)	16	10mm	2(两组)	A(NPN) B(PNP)	0.4~3.5	150	198
		20					190	238
		24					230	278
		28					270	318
		32					310	358
		36					350	398
		40					390	438
		44					430	478
		48					470	518
		52					510	558
		56					550	598
		60					590	638
		64					630	678
		68					670	718
		72					710	758
		76					750	798
		80					790	838
		84					830	878
88	870	918						
92	910	958						
96	950	998						
100	990	1038						
104	1030	1078						

代码	型号	光轴间距	输出数量	信号输出方式	检测距离(m)	H	J		
	光束数					有效保护高度	光幕高度		
	108					1070	1118		
	112					1110	1158		
	116					1150	1198		
	120					1190	1238		
	124					1230	1278		
	128	K10 (10mm)				1270	1318		
	132					1310	1358		
	136					1350	1398		
	140					1390	1438		
	144					1430	1478		
	148					1470	1518		
	152					1510	1558		
	8					140	198		
	12					220	278		
	16					300	358		
	20				380	438			
	24				460	518			
	28				540	598			
	32				620	678			
	36				700	758			
	40				780	838			
	44				860	918			
	48				940	998			
	52	K20 (20mm)				1020	1078		
	56					1100	1158		
	60					1180	1238		
	64					1260	1318		
	68					1340	1398		
	72					1420	1478		
	76					1500	1558		
	80			2(两组)	A(NPN) B(PNP)	0.4~3.5	1580	1638	
	84						1660	1718	
	88						1740	1798	
	92		1820				1878		
	96		1900				1958		
	4							120	198
	6							200	278
	8							280	358
	10							360	438
	12							440	518
	14				520	598			
	16				600	678			
	18				680	758			
	20				760	838			
	22				840	918			
	24				920	998			
	26	K40 (40mm)				1000	1078		
	28					1080	1158		
	30					1160	1238		
	32					1240	1318		
	34					1320	1398		
	36					1400	1478		
	38					1480	1558		
	40					1560	1638		
	42					1640	1718		
	44					1720	1798		
	46				1800	1878			
	48				1880	1958			
	4				240	355			
	6	K80 (80mm)				400	515		
	8					560	675		
	10					720	835		

产品技术参数

检测距离	0.4~3.5m
保护高度	光轴间距x(光束数-1)
光轴间距	10/20/40/80mm
检测精度	89mm
工作电源	DC12V-24V
工作电流	<200mA
负载电流	<200mA
响应时间	≤20ms
诊断覆盖率	>99%
平均无危险故障	120a
防护等级	IP65
适用温度	-10°C~55°C
环境温度	20°C, RH<=85%
抗光干扰	10000Lux(入射角>=5°)
抗振动	频率:10-55Hz, 振幅: 0.35mm
抗冲击	10g, 16ms, X, Y, Z轴, 每轴1000次



型号				
代码	光束数	光轴间距	输出数量	信号输出方式
ZJH85	4	K80	2(两组)	A(NPN) B(PNP)
	6			

ZJH85-4-K80-2-A



销售时, 会赠送配套的弯角板支架。