
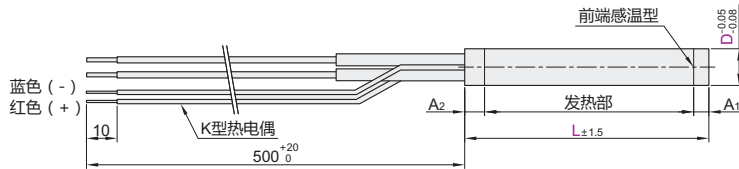


代码	类型	材质				
		护套	发热丝	引出线	线缆	绝缘粉末
ZIM94	带传感器型	SUS321	Ni80Cr20	纯镍耐热线	Ni-GB	MgO

注意事项：

- 最高使用温度为铠装管部温度，导线最高耐温200°C，导线务必从安装孔引出；
- 请勿使加热管露出被加热物体在大气中空烧；
- 使用温度500°C以下。



代码	型号	L	额定功率 W±5%	额定电压 V±5%	冷端长度 A	发热部 长度		
ZIM94	8	50	80	220	A = A ₁ + A ₂ L = 50时 A ₁ = 5mm, A ₂ = 5mm	L - A		
		80	100					
		120	160					
		150	200					
		200	280					
		260	350					
	10	50	90				A = A ₁ + A ₂ L = 50时 A ₁ = 5mm, A ₂ = 5mm 80 ≤ L ≤ 150时 A ₁ = 7mm, A ₂ = 10mm	L - A
		80	120					
		120	150					
		150	200					
		250	320					
		350	450					
	12	50	140		A = A ₁ + A ₂ L = 50时 A ₁ = 5mm, A ₂ = 5mm 80 ≤ L ≤ 150时 A ₁ = 7mm, A ₂ = 10mm	L - A		
		80	180					
		120	230					
		150	250					
		380	300					
		500	500					

其它长度可定制。



请按图示订货

型号		L	额定功率 W±5%	额定电压 V±5%
代码	D			
ZIM94	8	50	80	220
			100	

ZIM94 - D8 - L50 - W80 - V220

