

远心镜头

代码	类型	分辨率	接口
NHP11	远心镜头	标准	C
NHP12		高	

产品特点:


- 分辨率最高可达2μm;
- 支持配置同轴光源;
- 低畸变, 总畸变率低于0.3%, 最小畸变可达0.01%;

应用:


- 适合工业领域各种行业高精度检测, 定位, 测量。



U(非同轴)



D(同轴)

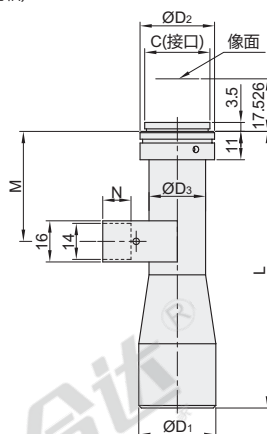

代码	型号	工作距离 (mm)	照明 类型	分辨率 (μm)	远心度 (°)	光学畸变 (%)	景深 (mm)	相机芯片尺寸对应的 FOV(mm×mm)			U(非同轴)				D(同轴)					
	光学放大 倍率(x)							1/3"	1/2"	2/3"	D ₁	L	D ₂	D ₃	D ₁	L	D ₂	D ₃	M	N
标准 分辨率 NHP11	0.3	110		33	0.1	0.300	16.4	16×12	21.67×16.33	不支持	43	134		22	43	137.1		22	33.1	9
	0.5	65		22	0.3	0.010	6.4	9.6×7.2	13×9.8	16.8×14.2	36	102.1		24	36	105.1		24	52	7
		110		0.18	0.180						29	106.3		22	29	109.6		22	38.2	12
	0.8	65		12.22		0.090	2.4	6×4.5	8.13×6.13	10.5×8.88	27	98.3			27	101.4			36.6	
		110		13.75		0.010	2.7				30	117.2			30	120.1			52.7	
	1	65		11		0.040	1.7	4.8×3.6	6.5×4.9	8.4×7.1	27	107.6			27	110.6			45.7	
		110			0.030		30				126.7			30	129.5			62.1		
	2	65		13.75		0.180	2.2				22	140.2			22	143.3			68.8	
		110		5.8	0.1	0.030	0.45	2.4×1.8	3.25×2.45		16	67.9			16	71.1			37.7	
	110		7.3	0.300		0.5	20				82		20	85.3			43.8			
	3	65		5.6		0.130	0.27	1.6×1.2	2.17×1.63		16	67.9		16	71.1			37.6	9	
		110		6			20				107.6		20	110.3			68.9			
	4	65		4.5		0.120	0.12					102.7			105.9			53.7		
		110		7.3		0.100	0.24					88.9			92.1			44.9		
	6	65		4.3	0.01	0.03	—	0.8×0.6	1.1×0.8		16	121.4			16	124.8			72.6	
		110		7.3	0.05	0.07	0.13					1.07×0.8			105.6			109.2		62
	8	65		4.3	0.01	0.028	—	0.6×0.5	0.8×0.6			141.3	29			145.2	29		92.9	
		65		14.35	0.26	0.010	6.4				9.6×7.2	13×9.8	16.8×14.2	36	102.1			36	105.1	
高分辨率 NHP12	0.5	110		12.7		0.095	4	9.6×7.2	13×9.8	16.8×14.2	35	126.9			35	129.5			54.2	11
		65				0.090	1.7				6×4.5	8.13×6.13	10.5×8.88	30	98.3			30	101.4	
	0.8	110		8.25		0.010	1.52				34	117.2			34	120.1			52.7	
		65		7.33	0.1	0.040							30	107.6			30	110.6		45.7
	1	110		7.3		0.030		4.8×3.6	6.5×4.9	8.4×7.1	34	126.7			34	129.5			62.1	
		200		9.4	0.2	0.070	1.42							36	188.7			36	191.9	
	1.5	110		5.24		0.023	0.54	3.2×2.4	4.33×3.27	5.6×4.73		121.6				121.6			68.8	
		65		4.46	0.15	0.036	0.34				2.4×1.8	3.25×2.45	4.2×3.55	30	129.6		22	30	121.6	
	2	110		3.5			0.038	0.18	1.6×1.2	2.17×1.63	2.8×2.37	25	99.5			25	99.5			61.7
		65		4.02		0.037	0.2							30	132.2			30	132.2	
	3	110		3	0.11	0.064	0.1	1.2×0.9	1.63×1.23	2.1×1.78	25	103.1			25	103.1			65.4	
		65		3.67	0.04	0.058	0.14							30	135.2			30	135.2	
	4	110		2.9	0.15	0.028	0.08	0.8×0.6	1.1×0.8	1.4×1.2	25	129.3			25	129.3			93.7	
		65		3.7	0.03	0.03	0.09							30	169.5			30	169.5	



请按图示订货

型号	代码	光学放大倍率(x)	工作距离(mm)	照明类型
NHP11	0.3	110	65	U
NHP12	0.5	110	65	D

NHP11—0.3—110—U



未税价(元)

优惠价

数量	1~9	50~
价格	100%	另行报价



交货期

7