



代码	材质	表面处理
ATY05-F	A6063-T5	喷砂氧化

- ① 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。

■ L长度公差




ATY05-F-2040AB
ATY05-F-3030AB
ATY05-F-3060AB
ATY05-F-4040AB
ATY05-F-4080AB




ATY05-F-3030CD
ATY05-F-3060CD
ATY05-F-4040CD
ATY05-F-4080CD


ATY05-F-6030CD
ATY05-F-6060CD
ATY05-F-8040CD
ATY05-F-5050CD




ATY05-F-8080CD
ATY05-F-50100CD

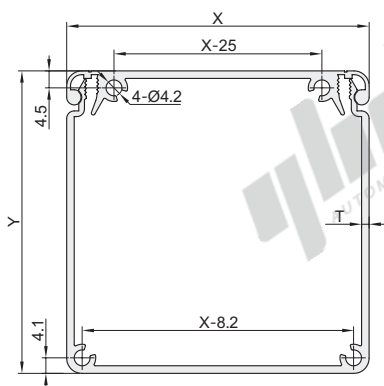

ATY05-F-100100CD

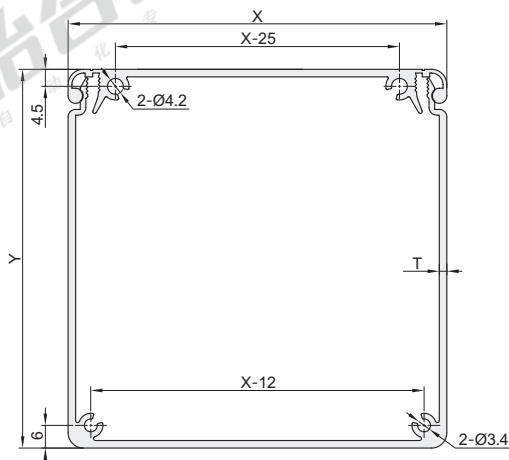


ATY05-F-80160CD

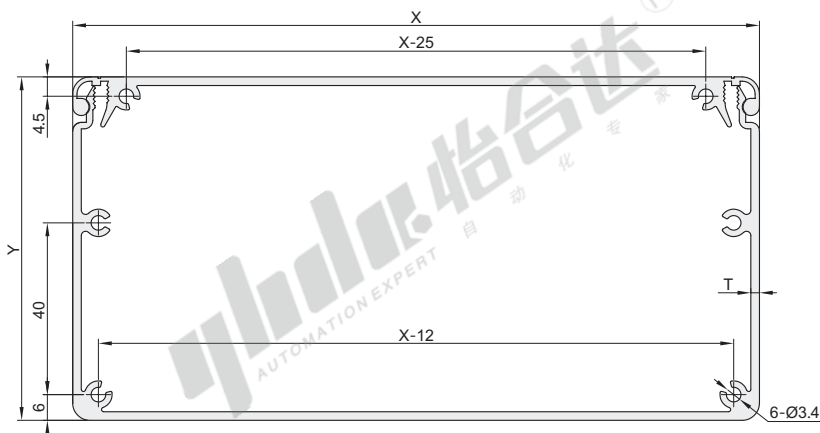


视角标准：第一视角


40系列
ATY05-F-40A




ATY05-F-40C




ATY05-F-40D




80系列
ATY05-F-80A




ATY05-F-80C




ATY05-F-80D




120系列
ATY05-F-120A




ATY05-F-120C




ATY05-F-120D




160系列
ATY05-F-160A




ATY05-F-160C




ATY05-F-160D




槽口详图



线槽型材组合示意图



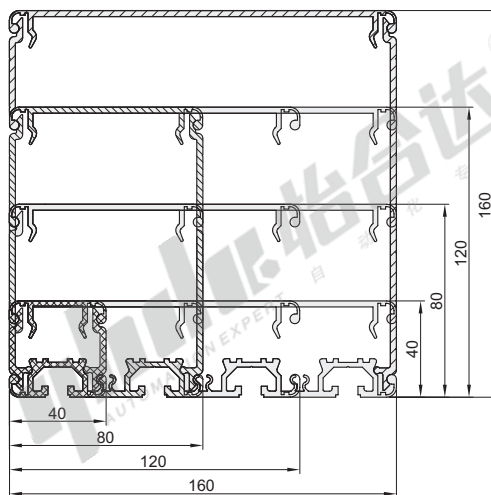


线槽型材组装图



视角标准：第一视角

组合线槽示意图



① 因为支撑型材和壁板型材外部尺寸相同，所以可以选择型材相应位置构建不同线槽，用来满足客户的需求



型号		L	X	Y	T	每米重量Kg/m	截面积
代码	规格	最小单位0.5				(理论值)	(mm ²)
ATY05-F	2040AB	50~6000	20	40	1	0.47	163.85
	3030AB		30			0.46	163.29
	3060AB		60	30		0.63	223.21
	4040AB		40			0.58	203.85
	4080AB		80	40	2	0.80	283.21
	3030CD		30	30		0.75	263.66
	3060CD		60			1.09	383.66
	4040CD		40			0.97	343.66
	4080CD		80	40		1.43	504.66
	6030CD		30		2	1.10	383.65
	6060CD		60	60		1.44	503.66
	8040CD		40	80		1.44	503.65
	8080CD		80			2.02	423.66
	5050CD		50	50	2.5	1.20	711.24
	50100CD					1.90	671.24
	100100CD		100	100		2.57	907.08
	80160CD		160	80		3.01	1116.36
	40A		—	34	1.5	0.23	75.27
	40C		40	—		0.36	127.25
	40D		—	—		0.60	211.20
	80A		—	74		0.48	171.41
	80C		—	—	2.5	0.66	231.86
	80D		80	—		1.21	426.27
	120A		—	114		0.85	300.23
	120C		120	—		1.03	362.16
	120D		—	—	2.5	1.83	641.35
	160A		—	154		1.13	400.08
	160C		160	—		1.31	462.16
	160D		—	—		2.43	856.42



请按图示订货

型号		L
代码	规格	最小单位0.5
ATY05-F	3030AB	50~6000
	4040CD	

ATY05-F—3030AB—L800