


代码	类型	安装方式	材质	表面处理
ZWC01	经济型	底部安装	铝合金	本色阳极氧化

特点:


- 可定制任意长度的气刀;
- 空气放大率可达40倍;
- 安装简单, 无活动部件, 免维护;
- 气流均匀, 气幕的宽度等于气刀的长度。




L: 100~450

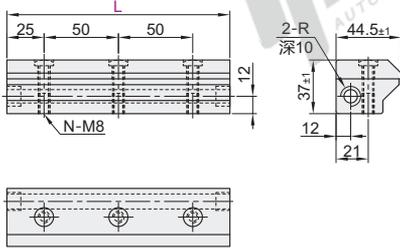


L: 500/550

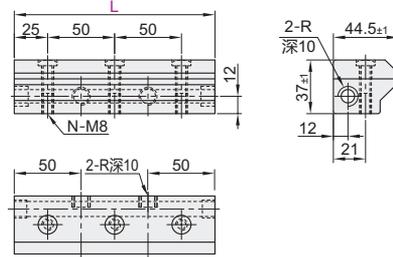

L: 600~700

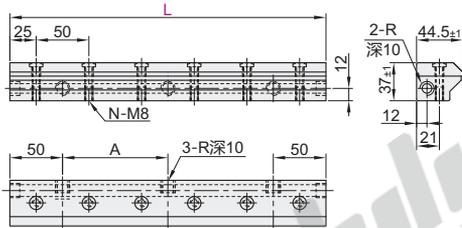

L: 750~1000

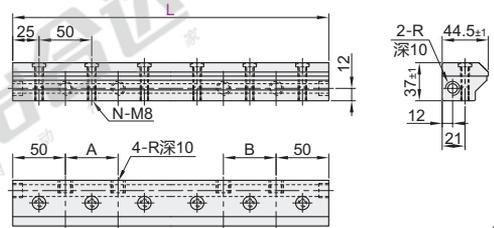

代码	型号	安装孔数 N	A	B	进气口螺纹 R	耗气量 (L/min)	噪音 (Db[A])
	L						
ZWC01	100	2				350	50
	150	3				521	54
	200	4				700	56
	250	5				885	58
	300	6				1050	60
	350	7				1220	61
	400	8				1410	
	450	9				1605	63
	500	10				1770	
	550	11				1965	65
	600	12				2135	
	650	13	250			2310	66
	700	14	300			2480	68
	750	15	200	200		2665	
	800	16				2860	
	850	17	250	250		3050	70
	900	18				3235	
	950	19				3430	
	1000	20	300	300		3635	75



型号	
代码	L
ZWC01	100
	150

ZWC01-L100

超级气刀