


圆锥滚子轴承

◀ 外圈无挡边
进口型

代码	类型	轴承类型 代码	后置代码	轴承精度	轴承材质	
					国标	相当
J-BBW01	进口型	3	—	GB/T 307.1 0级	GCr15	SUJ2

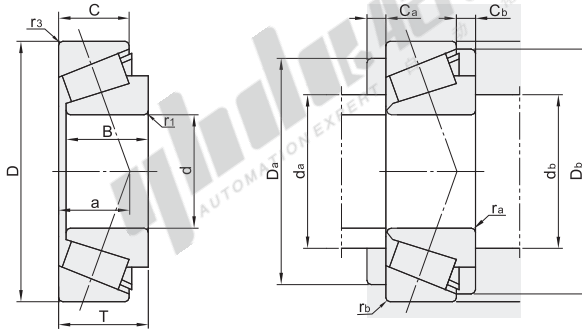

视角标准：第一视角

型号	d	D	T	B	C	r ₁ (min)	r ₃ (min)	额定载荷		极限转速(r/min)		作用点 a	安装尺寸										重量 (Kg) (参考)	
								Cr(动) KN	Cor(静) KN	脂润滑	油润滑		d _a (max.)	d _b (max.)	D _s (max.)	D _a (min.)	D _b (min.)	C _a (min.)	C _b (min.)	r _a (max.)	r _b (max.)			
J-BBW01-30302	15	42	14.25	13	11			23.6	21.1			9.5	22	20.5	36.5	35	38	3						0.096
J-BBW01-30203		40	13.25	12		1	1	20.1	19.9	9500	13000		23				2	2	1	1				0.079
J-BBW01-32203	17	47	17.25	16	14			22.7	23.3			11.5	23	22.5	34.5	33	37	3						0.105
J-BBW01-30303		47	15.25	14				29.2	26.7	8500			24		41.5	40	42	3	3.5					0.133
J-BBW01-32004		42	15	15	12	0.6	0.6	24.6	27.4	9000	12000	10.5	25	24.5	37.5	36	39		3	0.6	0.6			0.102
J-BBW01-30204			15.25	14				27.9	28.5			11000	11.5	27		40	44							0.124
J-BBW01-32204	20	47	19.25	18	15	1	1	31.5		8000			12.5	26	25.5	41.5	39	43	2	4	1	1		0.158
J-BBW01-30304			16.25	15	13			35	33.5	7500	10000	10.5	28		28.5	43.5	42.5	47.5		3	1.5	1.5		0.171
J-BBW01-32304			22.25	21	18	1.5	1.5	45.5	47.5	8000		14	27		28.5	43	47		4					0.204
J-BBW01-32005			15	15	11.5			27.4	33	8300	11000	12	30			44		3	3.5					0.118
J-BBW01-33005		47	17	17	14	0.6	0.6	31	38	8000		11	29	29.5	42.5	40	43.5		3	0.6	0.6			0.131
J-BBW01-32205			19.25	18	16			38.5	43.5			10000	14	31		43	48		4					0.186
J-BBW01-30205		52	16.25	15	13	1	1	32	35	7000		9000	12.5	31	30.5	46.5	44	48	2	3	1	1		0.159
J-BBW01-33205	25		22	22	18				56.5	7900	10000	14	30		43	49	4	4						0.225
J-BBW01-30305			18.25	17	15			47.5	46		8500	13	34			53.5	52		3					0.271
J-BBW01-32305		62	25.25	24	20	1.5	1.5	62.5	66		8000	16	32		33.5	53.5	52		3					0.365
J-BBW01-31305			18.25	17	13			38	40	5700		19.9	33	39	53	47	59	3	5	1.5	1.5			0.260
J-BBW01-32006			17					36	44.5	6700	9000	13.5	35			49.5	48		4					0.17
J-BBW01-33006		55	20	20	16			36.13	45.9	5865	7820	13	35.5			46.5	52		4					0.2
J-BBW01-30206			17.25	16	14	1	1	43	47.5		8000	13.5	37	35.5		53	57	2	3	1	1			0.245
J-BBW01-32206	30	62	21.25	20	17			52	60	6000	8500	15.5			56.5	52	58	2.5	4					0.285
J-BBW01-33206			25	25	19.5			66.5	79.5		8000	16	36			53	59	5	5.5					0.355
J-BBW01-30306			20.75	19	16			59.5	60	5300	7500	15	40			62			4.5					0.408
J-BBW01-32306		72	28.75	27	23	1.5	1.5	80	88.5	5600	7000	18.5	38	38.5	63.5	59	66	3	5.5	1.5	1.5			0.575
J-BBW01-32907		55	14	14	11.5	0.6	0.6	23.29	31.88	5780	7650	10.5	40	39.5	50.5	48	52.5	2.5	2.5	0.6	0.6			0.12
J-BBW01-32007			18	18	14	1	1	43.5	55.5			15.5				54		4						0.223
J-BBW01-33007			21	21	17			49	65	5600	8000	14	40.5			52								0.267
J-BBW01-30207			18.25	17	15			54	59.5			15	44			62		3	3					0.345
J-BBW01-32207	35	72	24.25	23	19	1.5		70.5	83.5	5300	7100	17.5	43	43.5	63.5		67		5	1.5				0.54
J-BBW01-33207			28	28	22		1.5	86.5	108			18.5	42				68	5	6			1.5		0.76
J-BBW01-32307			32.75	31	25	2		99	111	5000		20.5	43	45		66	74		7.5					0.513
J-BBW01-30307		80	22.75	21	18	2		76	79	4800	6700	17	45		71.5	70		3	4.5	2				0.52
J-BBW01-31307				15				62	68	4300	6000	25.2	44	51	71	62	77		7.5					0.163
J-BBW01-32908		62	15	15	12	0.6	0.6	34	47	5600	7500	11.5	45.5	44.5	57.5	54	58.5		3	0.6	0.6			0.28
J-BBW01-32008			19	19	14.5	1	1	52.5	71	5300	7100						65	4	4.5					0.31
J-BBW01-33008		68	22	22	18			50.58	70.13	4505	6035	15	46	45.5	62.5	60	64	2.5	4	1	1			0.49
J-BBW01-33108		75	26	26	20.5			67.58	87.55	4420	5865	18	47		66.5	65	71	4	5.5					0.438
J-BBW01-30208			19.75	18	16			63.5	70	4800		16.5	49			69			3.5					0.559
J-BBW01-32208	40	80	24.75	23	19	1.5	1.5	74	90.5	4500	6300	19	48	48.5	71.5	68	75	3	5.5	1.5				0.73
J-BBW01-33208			32	32	25			87.55	112.2	4165	5610	21	47			67	76	5	7		1.5			0.761
J-BBW01-30308			25.25	23	20	1		90.5	101	4300	5600	19.5	52			77	82		5					1.045
J-BBW01-32308		90	35.25	33	27	2		120	145	4500	6000	27.5	48	50	81.5	72	84			2				0.726
J-BBW01-31308			25.25	23	17		1.5	80	89.5	4000	5300	28.7		56	81	70	87		3	8				0.187
J-BBW01-32909		68	15	15	12	0.6	0.6	34.5	50.5	5000	6700	12		50	63.5	59.5	64.5		3	0.6	0.6			0.354
J-BBW01-32009		75	20	20	15.5	1	1	60	83	4500	6300	16.5	51	50.5	69.5	67	72		4	4.5	1	1		0.54
J-BBW01-33109		80	26	26	20.5			71.83	97.75	3995	5270	19.5	52		71.5	69	77		5.5					0.506
J-BBW01-30209			20.75	19	16			68.5	79.5	4300	6000	18	54			74	80		3	4.5	1.5	1.5		0.602
J-BBW01-32209		85	24.75	23	19	1.5	1.5	83	102			20	53	53.5	76.5	73			5.5					0.78
J-BBW01-33209			32	32	25			90.95	119.85	3740	5015	22	52			72		5	7					

① 1Kg=9.81N

外圈无挡边 ▶ 进口型

圆锥滚子轴承

型号	d	D	T	B	C	r ₁ (min)	r ₃ (min)	额定载荷		极限转速(r/min)		作用点 a	安装尺寸										重量 (Kg) (参考)
								Cr(动) KN	Cor(静) KN	脂润滑	油润滑		d _a (max.)	d _b (max.)	D _a (max.)	D _a (min.)	D _b (min.)	C _a (min.)	C _b (min.)	r _a (max.)	r _b (max.)		
J-BBW01-30309	45	100	27.25	25	22			112	127	3800	5300	21	59	55	91.5	86	93		5				1.008
J-BBW01-31309				18	2	1.5	95.5	109	4000	5000	31.5	57	61	91	79	96	3	9	2	1.5	0.958		
J-BBW01-32309				38.25	36	30			144	177	3800	5300	25.5	56	55	91.5	82	93		8			1.417
J-BBW01-32910		72	15	14	12	0.6	0.6	26.78	42.93	3995	5355	14.5	55	54.5	67.5	63.5	69.5	3	3	0.6	0.6	0.19	
J-BBW01-32010		80	20	20	15.5			61	87	4300	6000					77			4.5			0.31	
J-BBW01-33010			24	24	19		1	59.08	87.55	3740	4930	17.5		56		72		4	5	1	1	0.43	
J-BBW01-33110		85	26	26	20			73.53	102.85	3570	4760	20.5			76.5	74	82		6			0.58	
J-BBW01-30210	50		21.75	20	17			76	91.5	4000	5300		19.5	58	58.5		79		85	3	4.5	1.5	0.592
J-BBW01-32210		90	24.75	23	19	1.5	1.5	87.5	109			21			81.5	78			5.5			0.618	
J-BBW01-33210			32	32	24.5			97.75	134.3		3400	4505	23.5	57			77	87	5	7.5			0.85
J-BBW01-30310			29.25	27	23			130	148			23	65			95			6			1.25	
J-BBW01-32310	110	42.25	40	33	2.5	2		176	220	3600	4800	28.5		62	100	90		3	9	2	2	1.885	
J-BBW01-31310			29.25	27	19			106	120	3800		34.2				87	105		10			1.254	
J-BBW01-32911		80	17	17	14	1	1	37.83	62.48	3655	4845	14.5	60.5	60.5	74.5	70.5	76.5	3	3	1	1	0.27	
J-BBW01-32011			23	23	17.5			81.5	117	3800	5300	20	63					4	5.5			0.53	
J-BBW01-33011	90	27	27	21	1.5			77.78	117.3	3400	4590	19.5		63.5					6	1.5		0.64	
J-BBW01-33111		95	30	30	23			94.35	131.75	3315	4420	22	62			86.5	83	91		5	7		0.85
J-BBW01-30211			22.75	21	18		1.5	94.5	113			21	64			88	94		4	4.5		1.5	0.739
J-BBW01-32211	55	100	26.75	25	21	2		110	137	3600	5000	22.5	63	65	91.5	87	95		4	5.5			0.915
J-BBW01-33211			35	35	27			117.3	159.8	3060	4165	25.5	62			85	96	6	8			1.15	
J-BBW01-30311			31.5	29	25			150	171			24.5	71			104				6.5	2		1.628
J-BBW01-32311	120	45.5	43	35	2.5	2		204	258	3200	4300	30.5	68	67	110	99	111	4	10.5		2	2.39	
J-BBW01-31311			31.5	29	25			121	137	3400		24.6	70	71		104				6.5			1.576
J-BBW01-32912		85	17	17	14	1	1	43.35	70.55		4505	15.5	65.5	65.5	79.5	76.5	82	3	3	1	1	0.3	
J-BBW01-32012			23	23	17.5			85.5	127	3600	5000	21					91	4	5.5			0.56	
J-BBW01-33012	95	27	27	21	1.5			79.48	123.25	3145	4165	20.5	67	68.5	86.5	85	90	5	6	1.5		0.68	
J-BBW01-33112		100	30	30	23			96.05	139.4	3060	3995	23.5			91.5	88	96	5	7			0.91	
J-BBW01-30212			23.75	22	19		1.5	104	123			22	70			96	103			4.5		1.5	0.934
J-BBW01-32212	60	110	29.75	28	24	2		131	167	3400	4500	25	69	70	101.5	95	104	4		5.5	2		1.197
J-BBW01-33212			38	38	29			136.85	189.55	2890	3825	27.5	69			93	105	6	9				1.55
J-BBW01-30312			33.5	31	22			127.5	149.6	2295	3060	40.5	73			103	124						1.97
J-BBW01-32312	130	48.5	46	37	3	2.5		233	295	3000	4000	32		74	118	107	120	4	11.5	2.5	2	2.88	
J-BBW01-31312			33.5	31	22			145	166	2600	3600	40.3		84		103	125						1.896
J-BBW01-32913		90	17	17	14	1	1	41.23	72.25	3145	4165	16.5	70	70.5	84.5	80	86.5	3	3	1	1	0.32	
J-BBW01-32013			23	23	17.5			86.5	132	3400	4500	22.5				90	97	4	5.5				0.63
J-BBW01-33013	100	27	27	21	1.5			82.88	132.6	2890	3910	21.5	72	73.5	91.5	89	96	5	6	1.5		0.73	
J-BBW01-33113		110	34	34	26.5			122.4	179.35	2805	3740	26	73		101.5	96	106	6	7.5			1.28	
J-BBW01-30213			24.75	23	20		1.5	122	151			23.5	77			106	113			4.5		1.5	1.132
J-BBW01-32213	65	120	32.75	31	27	2		157	202	3000	4000	27	75	75	111.5	104		4	5.5	2		1.58	
J-BBW01-33213			41	41	32			165.75	225.25	2635	3570	29.5	74			102		7	9				1.98
J-BBW01-30313			36	33	23			147.05	173.4	2125	2805	44	79			111	133			13			2.42
J-BBW01-32313	140	51	48	39	3	2.5		267	340		3800	34.5		79	128	117	130		12	2.5	2	3.609	
J-BBW01-31313			36	33	23			173	205	2800	3600	43.2		80	89		111	133	4	13			2.426
J-BBW01-32914	100	20	20	16	1	1		58.23	93.5	2890	3910	18	75	75.5	94.5	90	96		4	1	1	0.49	
J-BBW01-32014			25	25	19			104	158	3200	4300	24	78			98			6				0.85
J-BBW01-33014	110	31	31	25.5	1.5			107.95	173.4	2720	3570	22.5	79	78.5	101.5	99	105	5		5.5	1.5		1.07
J-BBW01-30214			26.25	24	21		1.5	132	163		2800	25.5	81			110	118		5			1.5	1.296
J-BBW01-32214	70	125	33.25	31	27	2		157	205		4000	28.5	80	80	116.5	108		4	6	2			1.62
J-BBW01-33214			41	41	32			170.85	239.7	2465	3315	31	79			107	120	7	9				2.1
J-BBW01-30314			38	35	25			164.05	194.65	1955	2550	47	84			118	142			13			2.92
J-BBW01-32314	150	54	51	42	3	2.5		300	390	2600	3400	36.5	86		84	138	125	140		12	2.5	2	4.346
J-BBW01-31314			38	35	25			192	229			45.7	85	94		118	142	4	13				2.935
J-BBW01-32915		105	20	20	16	1	1	59.08	96.9	2720	3655	19	80	80.5	99.5	94	101.5		4	1	1	0.51	
J-BBW01-32015			25	25	19			109	171	3000	4000	25.5	83			103	110	5	6				0.88
J-BBW01-33015	115	31	31	25.5	1.5			94.35	158.1	2550	3400	23		83.5	106.5	101	110.5	6	5.5	1.5			1.11
J-BBW01-30215			27.25	25	22		1.5	143	182			27	85			115	124		5			1.5	1.384
J-BBW01-32215	75	130	33.25	31	27	2		165	219		3800	30		85	121.5	114		4	6	2			1.765
J-BBW01-33215			41	41	31			176.8	253.3	2295	3060	32	83			111			7	10			2.2
J-BBW01-30315			40	37	26			182.75	217.6	1785	2380	50				127	151	6	14				3.47
J-BBW01-32315	160	58	55	45	3	2.5		340	445	2400	3200	39	91	99	148	133	149	4	13	2.5	2	5.316	
J-BBW01-31-3																							

圆锥滚子轴承

◀ 外圈无挡边
进口型

型号	d	D	T	B	C	r ₁ (mm)	r ₃ (mm)	额定载荷		极限转速(r/min)		作用点 a	安装尺寸										重量 (Kg) (参考)	
								Cr(动) KN	Cor(静) KN	脂润滑	油润滑		d _a (max.)	d _b (max.)	D _a (max.)	D _a (min.)	D _b (min.)	C _a (min.)	C _b (min.)	r _a (max.)	r _b (max.)			
J-BBW01-32917		120	23	23	18			79.9	133.45	2380	3230	21	92		111.5	111	115	4	5				0.77	
J-BBW01-32017			29	29	22	1.5	1.5	143	231	2600	3600	28.5		93.5	117	125	6	7	1.5	1.5		1.25		
J-BBW01-33017		130	36	36	29.5			149.6	251.6	2210	2975	26	94		121.5	118						1.7		
J-BBW01-30217			30.5	28	24			184	233	2400	3200	30	97			132	141		6.5			2.06		
J-BBW01-32217		85	150	38.5	36	30	2.5	2	210	277	2400	3200	33.5	96	97	140	130	142	5	8.5	2	2	2.67	
J-BBW01-33217			49	49	37			241.4	357	2040	2720	37.5	95			128	144	7	12			3.58		
J-BBW01-30317			44.5	41	28			209.95	249.05	1615	2125	56	103			143	169	6	16.5			4.85		
J-BBW01-32317		180	63.5	60	49	4	3	410	535	2000	2800	43	102	103	166	150	167	5	14.5	3	2.5	7.302		
J-BBW01-31317			44.5	41	28			261	315	2000	2600	55.3	103	113		144	169	6	16.5			4.881		
J-BBW01-32918		125	23	23	18	1.5		82.88	142.8	2295	3060	22	96	98.5	116.5	112.5	120.5	4	5	1.5		0.82		
J-BBW01-32018			32	32	24		1.5	170	273	2400	3200	30		100	100	131.5	125	134	6	8		1.5	1.7	
J-BBW01-33018		140	39	39	32.5	2		182.75	306	2125	2805	28	100			127	135	7		6.5	2		2.18	
J-BBW01-30218			32.5	30	26			201	256	2200	3000	32	103		102	150	140	150					2.558	
J-BBW01-32218		90	160	42.5	40	34	2.5	2	256	350	2200	3000	36	102			138	152	5		8.5	2	3.265	
J-BBW01-30318			46.5	43	30			229.5	272	1530	2040	59	109			151	179	6	16.5			5.66		
J-BBW01-32318		190	67.5	64	53	4	3	450	590	2000	2600	45.5	108	108	176	157	177	5	14.5	3	2.5	8.568		
J-BBW01-31318			46.5	43	30			265	315	1800	2400	58.6	110			152	179	6	16.5			5.511		
J-BBW01-32919		130	23	23	18	1.5		85.85	151.3	2125	2890	23.5	101	103.5	121.5	117	125.5	4	5	1.5		0.85		
J-BBW01-32019			32	32	24		1.5	173	283	2400	3200	31.5	105			130	140	6	8			1.5	1.7	
J-BBW01-33019		145	39	39	32.5	2		186.15	318.75	1955	2635	28.5	104	105	136.5	131	139	7	6.5		2		2.27	
J-BBW01-30219			34.5	32	27			223	286	2200	2800	34	110			149	159		7.5				3.269	
J-BBW01-32219		170	45.5	43	37	3	2.5		289	400	2200	2800	39	108	109	158	145	161	5	8.5	2.5	2	4.216	
J-BBW01-32319			71.5	67	55			460	600	1900	2400	49	113	113		166	186		16.5				9.645	
J-BBW01-31319		200	49.5	45	32	4	3	310	375	1800	2400	61.9	115	123	186	158	187	6	17.5	3	2.5		6.635	
J-BBW01-32920		140	25	24	20	1.5		82.88	137.7	2040	2720	25	107.5	108.5	131.5	127.5	135.5	4	5	1.5		1.08		
J-BBW01-33020		150	32	32	24		1.5	176	294	2200	3000	32.5	109		110	141.5	134	144	6	8		1.5	1.947	
J-BBW01-30220			39	39	32.5		2	190.4	331.5	1870	2550	29.5	108			135	143	7	6.5		2		2.37	
J-BBW01-32220		180	37	34	29		2.5	255	330	2000	2600	36	116		114	157	168		8				3.976	
J-BBW01-32320			49	46	39	3		325	450	2000	2600	41.5	114			154	171	5	10	2.5	2		5.213	
J-BBW01-31320		215	77.5	73	60	4	3	565	755	1700	2400	53	121	118	201	177	200		17.5	3	2.5		12.96	
J-BBW01-32921			56.5	51	35			350	435	1600	2000	67.7	125	136		169	202	7	21.5				8.6	
J-BBW01-32021		145	25	25	20	1.5	1.5	107.1	186.15	1955	2550	25	113.5	113.5	136.5	131.5	140.5	5	5	1.5	1.5		1.2	
J-BBW01-33021		160	35	35	26		2.5	204	340	2000	2800	34.5		116	117	150	143	154	6				2.5	
J-BBW01-30221			43	43	34			208.25	357	1785	2380	31				145	153	7		9		2	3	
J-BBW01-32221		190	39	36	30		2.5	280	365	1900	2600	38	122		119	165	178						4.51	
J-BBW01-32321			53	50	43	3		360	510	1900	2600	44	119			161	180	6		10	2.5		6.26	
J-BBW01-32922		225	81.5	77	63	4	3	585	780	1700	2200	55.2	129	130	211	186	209		18.5	3	2.5		14.21	
J-BBW01-32022		150	25	25	20	1.5	1.5	107.95	192.1	1870	2465	26.5	117.5	118.5	141.5	137	145.5	5	5	1.5	1.5		1.23	
J-BBW01-33022			38	38	29		2.5	236	390	2000	2600	36.5	122		122	160	152		7		9	2	3.1	
J-BBW01-30222		170	47	47	37			244.8	425	1700	2295	33.5	121				161		10			2	3.8	
J-BBW01-32222			41	38	32			315	420	1800	2400	40	129			174	188		9				5.27	
J-BBW01-32222		200	56	53	46	3	2.5		400	565	1800	2400	47	126	124	188	170	190	6	10	2.5		7.36	
J-BBW01-31322		240	63	57	38	4	3	430	563	1400	1900	74.7	136	146	226	191	224	7	25	3	2.5		12.2	
J-BBW01-32924		165	29	27	23	1.5	1.5	100.3	174.25	1700	2210	31	130.5	128.5	156.5	147.5	159.5	6	6	1.5	1.5		1.63	
J-BBW01-32024		180	38	38	29	2.5	2	242	405	1800	2400	39	131	132	170	161	173	7	9	2		3.1		
J-BBW01-32224			43.5	40	34			335	450	1600	2200	44	140		134	187	203		9.5		2		6.125	
J-BBW01-32324		215	61.5	58	50	3	2.5	440	635	1600	2200	51.5	136			181	204	6	11.5				9.169	
J-BBW01-31324			90.5	86	69	4	3	770	1060	1400	1900	61.5	145	138		213	239		21.5				21.7	
J-BBW01-32926		260	68	62	42			526	665	1300	1800	81.6	148	156	246	206	244	9	26	3	2.5		15.4	
J-BBW01-32026		180	32	30	26	2		120.7	214.2	1530	2040	34	139	140	170	163.5	174	6	6			2	2.22	
J-BBW01-30226			200	45	45		2.5	2	320	535	1600	2200	43.5	144	142	190	178	192	8	11		2	5.06	
J-BBW01-32226		230	43.75	40			4	3	375	505	1500	2000	45.5	152		148	203	218	7	9.5	3	2.5	7.24	
J-BBW01-32928			67.75	64	54			530	790	1500	2000	57	146			193	219		13.5				11.37	
J-BBW01-32028		190	32	32	25	2	1.5	170	318.75	1445	1870	34	150	150	181.5	177	184	6	6		2	1.5	2.51	
J-BBW01-30228		210	45	45	34	2.5	2	325	555	1600	2200	46	153	152	200	187	202	8	11		2		5.21	
J-BBW01-32228			45.75	42	36	3		390	515	1400	1900	47.5	163		158	219	237	7	9.5	2.5			8.892	
J-BBW01-32228		250	71.75	68	58	4	3	610	915	1400	1900	61	158		158	236	210	238		9		13.5	3	14.68
J-BBW01-31328		300	77	70	47	5	4	674	865	1100	1500	92.8	174	184	282	236	280		30	4	3		23.3	
J-BBW01-32030			225	48	48	36	3	2.5	375	650	1400	2000	49.5	164	164	213	200	216		8				6.2
J-BBW01-32230		150	270	77	73	60	4	3	595	900	1300	1700	64.5	170	168	256	226	254		17	3	2.5	17.4	
J-BBW01-32932			220	38	38	30	2.5	2	234.6	442	1275	1615	38.5	170.5	172	210	199	213.5	7	8	2		4.15	
J-BBW01-32032		160	240	51	51	38	3	2.5																

1Kg=9.81N



型号

J-BBW01-30302

请按图示订货



未税价(元)

● 优惠价

数量 1~9 10~

价格 100% 另行报价



交货期

6