
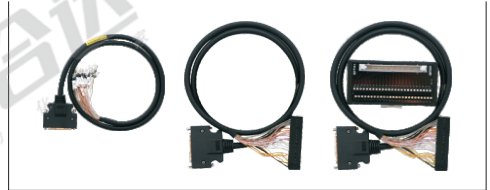


代码	类型	适用电机品牌
ZIA15	线束	三菱
ZIA16	线束+端子台	

插头接线图



线束
ZIA15

插头数1



插头数2



线束+端子台
ZIA16

插头数2



型号		总长 (m)	产品组成		适用电机品牌
代码	插头数				
线束 ZIA15	1	1 2 3		+	
	2				
线束+端子台 ZIA16	2				



型号		总长 (m)
代码	插头数	
ZIA15	1	1
	2	2
ZIA15 - 1 - 3		3

接线图

线束ZIA15

MOR	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
信号	P15R	VC/VLA	LG	LA	LAR	LB	LBR	LZ	LZR	PP	PG	OPC	—	—	SON	LOP/SP2	PC/ST1/RS2
MOR	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
信号	TU/ST2/RS1	RES	DICOM	DICOM	INP/SA	ZSP	INP/SA	TLC	—	TLA	LG	—	LG	—	—	OP	LG
MOR	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	—
信号	NP	NG	—	—	—	—	CR/SP1	EMG	LSP	LSN	LOP	DOCOM	DOCOM	ALM	RD	屏蔽	—

线束+端子台ZIA16

MOR	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
端子台	1	26	2	27	3	28	4	29	6	31	7	32	—	—	8	33	9
信号	P15R	VC/VLA	LG	LA	LAR	LB	LBR	LZ	LZR	PP	PG	OPC	—	—	SON	LOP/SP2	PC/ST1/RS2
MOR	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
端子台	34	10	35	11	36	12	37	14	—	15	40	—	39	—	—	16	41
信号	TU/ST2/RS1	RES	DICOM	DICOM	INP/SA	ZSP	INP/SA	TLC	—	TLA	LG	—	LG	—	—	OP	LG
MOR	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	SHELL
端子台	17	42	—	—	—	—	19	44	21	46	22	47	23	48	24	—	50
信号	NP	NG	—	—	—	—	CR/SP1	EMG	LSP	LSN	LOP	DOCOM	DOCOM	ALM	RD	屏蔽	SD