


# 浮动接头

## 内螺纹型 简易连接型

### T尺寸固定型

代码	类型	T尺寸固定型	材质		表面处理	表面硬度
			国标	相当		
WHC31	内螺纹型	T尺寸固定型	45	S45C	镀硬铬	750HV~

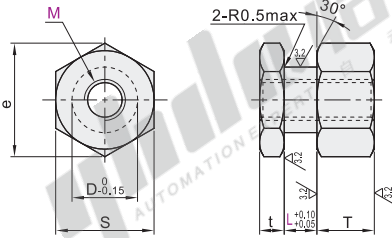

代码	型号		L							T	t	D	S	e					
	M	螺距	2	3	4	5	6	8	9	10	12	13	15	16	19	20			
WHC31	3	0.5	2	3	4	5	6			5		6	8	9.2					
	4	0.7	2	3	4	5	6	8		6	3	7	10	11.5					
	5	0.8	3	4	5	6	8	9	10	7		8	12	13.9					
	6	1.0	3	4	5	6	8	9	10	12		10	14	16.2					
	8	1.0	4	5	6	8	9	10	12	13	15	16		13	17	19.6			
		1.25	4	5	6	8	9	10	12	13	15	16							
	10	1.25	4	5	6	8	9	10	12	13	15	16	19	20					
		1.5	4	5	6	8	9	10	12	13	15	16	19	20	11	4	16	21	24.2
	12	1.25		5	6	8	9	10	12	13	15	16	19	20	12		18	23	26.6
	14			5	6	8	9	10	12	13	15	16	19	20	13		21	26	30
	16	1.5		8	9	10	12	13	15	16	19	20			15	5	25	30	34.6
	18			8	9	10	12	13	15	16	19	20							
22			12	15	20	20				17	6	27	32	36.9					

气动配件类

D4



请按图示订货

代码	M	螺距	L
WHC31	3	0.5	2 3 4
	4	0.7	2 3 4

WHC31-M3-0.5-L4



未税价(元)

数量	1~19	20~
价格	100%	另行报价




交货期

5

### T尺寸指定型

代码	类型	T尺寸指定型	材质		表面处理	表面硬度
			国标	相当		
WHC41	内螺纹型	T尺寸指定型	45	S45C	镀硬铬	750HV~

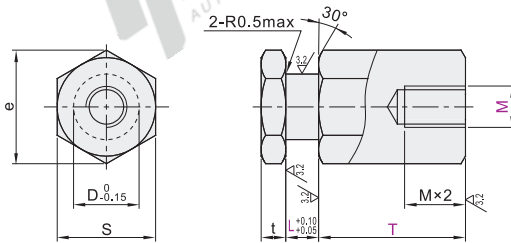

当  $t+L+T \leq 3M$  时, 螺纹孔变为通孔。



代码	型号		L							T	t	D	S	e			
	M	螺距	2	3	4	5	6	8	9	10	12	13	15	16	19	20	
WHC41	3	0.5	2	3	4	5	6			3~50	3	6	8	9.2			
	4	0.7	3	4	5	6	8	9	10			7	10	11.5			
	5	0.8	3	4	5	6	8	9	10		3	8	12	13.9			
	6	1.0	3	4	5	6	8		12			10	14	16.2			
	8	1.0	4	5	6	8			12				13	17	19.6		
		1.25	4	5	6	8	9	10	12	13							
	10	1.25	4	5	6	8	9	10	12	15							
		1.5	5	6	8	10						4	16	21	24.2		
	12	1.25	5	6	8	9	10	12	13	15	16	19	20		18	23	26.6
	14		5	6	8	9	10	12	13	15	16	19	20		21	26	30
	16	1.5	8	9	10	12	13	15	16	19	20						
	18		8	9	10	12	13	15	16	19	20						
22		12	15	20	20					10~100	6	27	32	36.9			



请按图示订货

代码	M	螺距	L	T
WHC41	4	0.7	3 4 5	8~40
	5	0.8	3 4 5	

WHC41-M4-0.7-L4-T10



未税价(元)

数量	1~19	20~
价格	100%	另行报价



交货期

5