









代码	类型	固定侧	材质		表面处理
			② ④ ⑥	⑤	② ④ ⑤ ⑥
LEB01	精密型	固定侧	S45C	SUJ2	发黑
LED01					无电解镀镍
LEG01					镀黑铬




- ① ② ③ ④为一体，请勿拆解，否则将影响精度。
 ① 轴承已经封入适量锂皂基抗极压润滑脂。
 ① 使用经预压调整后的JIS 5级的角接触轴承，最适用于高精度、高速旋转用途。

构成零件

编号	零件名称	数量
①	油封(Ø4~5无油封, Ø6~8 1个)	2
②	轴承座本体	1
③	角接触轴承 5级	1对
④	轴承盖	1
⑤	间隔环	2
⑥	支座用螺母	1
⑦	内六角紧定螺丝附垫片	2

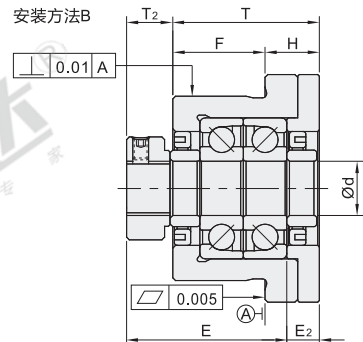

建议轴端加工尺寸



型号		Ød	T	H	F	E	ØDg6	ØR	P.C.D	G	安装方法A				安装方法B			Ød1	Ød2	t	S	油封 适用 轴径d4	建议轴端加工尺寸									
代码	规格										T1	E1	T2	E2	Ød1	Ød2	ØD1						Ød	ØA	B	C	M	L	T4			
发黑 LEB01	4*	4	15		9	18.5	18 ^{+0.006 -0.020}	32	24	25		2	6.5	3		3.4	6.5	4	10	5.5	4	4 ^{+0.001 -0.006}	3	18	5	M4×P0.5		6.5	3.5			
	5*	5	16.5	6		10.5	19.5	20 ^{+0.007 -0.020}	34	26	26	5.5	2.5	7	4				11	7.5	6	5 ^{+0.005 -0.012}	4	19	6	M5×P0.5			4.5			
	6	6	20		13	22	22 ^{+0.007 -0.020}	35	28	28		3.5	6.5	4.5		2.9	5.5	3.5	12	9.4	8	6 ^{+0.007 -0.020}	4	28	8	M6×P0.75	8		5			
	6B	6	20		13	22	22 ^{+0.007 -0.020}	36	28	28																						
	8S*	8	23		14	26	28 ^{+0.007 -0.020}	43	35	35		7	4	8	5		3.4	6.5		14	10	10/12	8 ^{+0.007 -0.020}		32	9	M8×P1.0	10				
	8	8	23		14	26	28 ^{+0.007 -0.020}	43	35	35										14	11.4											
	10S*	10	27		10		34 ^{+0.009 -0.025}	52	42	42		7.5	5	8.5	6	4.5	8		16	12	12/14/15	10 ^{+0.005 -0.012}	8	36	15	M10×P1.0			5.5			
	10	10	27		10		34 ^{+0.009 -0.025}	52	42	42										16	14.4											
	12	12			17		36 ^{+0.009 -0.025}	54	44	44									19	15.4	14/15/16	12 ^{+0.005 -0.012}	10			M12×P1.0						
	15S*	15	32		15		40 ^{+0.009 -0.025}	63	50	52	10	6	12	8	5.5	9.5	6	22	19.4		18/20	15 ^{+0.005 -0.014}	12	47	20	M15×P1.0	13		10			
无电解镀镍 LED01	15	15	32		15		40 ^{+0.009 -0.025}	63	50	52	10								20													
	17	17	45		23	47	50 ^{+0.009 -0.025}	77	62	61	11	9	14	12	6.6	11	10	24	22	20/25	17 ^{+0.005 -0.014}	15	59	23	M17×P1.0			10				
	20	20	52		30	50	57 ^{+0.010 -0.029}	85	70	68	8							30	25.4	25/28/30	20 ^{+0.005 -0.014}	17	62	25	M20×P1.0			11				
	25	25	57		27	60	63 ^{+0.010 -0.029}	98	80	79	13	10						35	31.4	30/32/36	25 ^{+0.005 -0.014}	20	75	30	M25×P1.5	22		15				
	30	30	62		30	61	75 ^{+0.010 -0.029}	117	95	93	11	12	17	18	11	17.5	15	40	37.4	36/40	30 ^{+0.005 -0.015}	25	72	38	M30×P1.5	25		9				

① 带*规格无镀镍、镀铬产品。



请按图示订货

代码	规格	Ød
LEB01	6	6
LED01	8	8

LEB01—6



未税价(元)

优惠价

数量	1~4	5~
价格	100%	另行报价



LEG01



7



1



其余