


品牌	轴承类型 代码	轴承精度	轴承游隙	后置代码	轴承材质	
					国标	相当
ZWZ	6	GB/T 307.1 0级	标准游隙(C0)	未标注: 钢 M: 黄铜	GCr15	SUJ2



① 出厂前未封入润滑脂, 请在使用前封入。

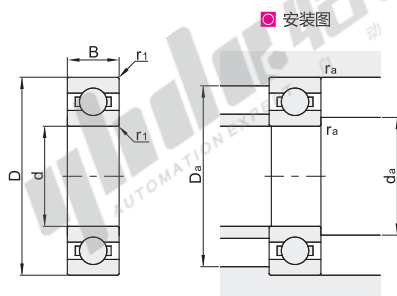

视角标准: 第一视角

型号	d	D	B	r1 (min)	基本额定负载(KN)		极限转速(r/min)		安装尺寸			重量(Kg) 参考
					Cr(动)	Cor(静)	脂润滑	油润滑	da (min)	Da (max)	ra (max)	
6200-ZWZ	10	30	9	0.6	6.5	3	24000	30000	14	26	0.6	0.03
6001-ZWZ	12	28	8	0.3	5.18	2.26	26000	—			0.3	0.02
6201-ZWZ		32	10		6.5	3	22000	28000	16	28		
6202-ZWZ	15	35	11	0.6	8	4	19000	24000	19	31	0.6	0.04
6203-ZWZ	17	40	12		9.1	5	17000	20000	21	36		
6004-ZWZ	20	42	12		9.4			19000	23.2	38.8		0.07
6204-ZWZ		47	14		13	6.7	15000	18000	25	42		0.11
6304-ZWZ		52	15	1	13.8	6.9	13000	16000		45	1	0.15
61805-ZWZ		37	7		4.2	2.64	16000	19000	27	35		0.02
61905-ZWZ	25	42	9	0.3	7.3	4.55			40	0.3	0.04	
16005-ZWZ			8		8	5	14000	17000	45		0.06	
6005-ZWZ		47	12	0.6	11.4	6.28	15000	18000	29	43	0.6	0.08
6205-ZWZ		52	15	1	14.3	8	12000	15000	30	47	1	0.13
6305-ZWZ	30	62	17	1.1	22.4	11.5	11000	14000	31.5	55.5		0.21
6405-ZWZ		80	21	1.5	37.5	19	9000	11000	33	72	1.5	0.53
61906-ZWZ		47	9	0.3	7.5	4.95	14000	17000	45		0.3	0.04
16006-ZWZ					10.6	6.75			53		0.08	
6006-ZWZ	35	55	13	1	13.2	7.96	12000	15000	34.6	50.4		0.12
6206-ZWZ		62	16	1	19.5	11.3	10000	13000	35	57	1	0.22
6306-ZWZ		72	19	1.1	28.4	15.4	9000	11000	36.5	65.5		0.35
6406-ZWZ		90	23	1.5	44.5	23	8500	10000	38	82	1.5	0.81
61907-ZWZ	40	55	10	0.6	9.35	6.7	11000	14000	38.2	51.8	0.6	0.08
6007-ZWZ		62	14	1	16	10.3	10000	13000	40	57	1	0.15
6207-ZWZ		72	17	1.1	26	14.7	9000	11000	41.5	65.5		0.29
6307-ZWZ		80	21	1.5	33.4	19.2	8500	10000	43	72	1.5	0.46
6407-ZWZ	45	100	25	1.5	55.5	29.5	7000	8500	92		0.92	
61908-ZWZ		62	12	0.6	13	9.2	10000	13000	43.2	58.8	0.6	0.11
6008-ZWZ		68	15	1	16.8	11.6	9500	12000	44.6	63.4		0.19
6208-ZWZ		80	18	1.1	31.2	18.2	8500	10000	46.5	73.5	1	0.37
6308-ZWZ	50	90	23	1.5	41	24	7500	9000	48	82	1.5	0.64
6408-ZWZ		110	27	2	67.5	36	6700	8000	49	101	2	1.20
61809-ZWZ		58	7	0.3	6.5	5	9500	12000	47	56	0.3	0.04
16009-ZWZ			10	0.6	14.9	11.4			49	71	0.6	0.17
6009-ZWZ	55	75	16	1	20	14	9000	11000	50	70		0.25
6209-ZWZ		85	19	1.1	33.7	20.7	7500	9000	51.5	78.5	1	0.43
6309-ZWZ		100	25	1.5	52.5	30	6700	8000	53	92	1.5	0.85
6409-ZWZ		120	29	2	73	43	6000	7000	54	111	2	1.59
61910-ZWZ	60	72	12	0.6	13.9	11	8500		53.2	68.8	0.6	0.13
16010-ZWZ			10		15.4	12.3		10000	54	76		0.18
6010-ZWZ		80	16	1	22	16.3	6500		55	75	1	0.26
6210-ZWZ		90	20	1.1	35.6	22.3	7100	8500	56.5	83.5		0.47
6310-ZWZ	65	110	27	2	62	38	6300	7500	59	101	2	1.12
6410-ZWZ		130	31	2.1	88	52	5300	6300	61	119		1.91
61811-ZWZ		72	9	0.3	8.8	8.1	8500	10000	57	70	0.3	0.08
61911-ZWZ		80	13	1	15.9	13.2	8000	9500	59.6	75.4	1	0.18
16011-ZWZ	70		11	0.6	18.6	15.2		7500	58.2	86.8	0.6	0.26
6011-ZWZ		90	18	1.1	29	20.7			61	84	1	0.38
6211-ZWZ		100	21	1.5	44.3	27.8	6300	7500	63	92	1.5	0.63
6311-ZWZ		120	29	2	71.5	45	5600	6700	64	111		1.38
6411-ZWZ	75	140	33	2.1	95	60	5000	6000	66	129	2	2.25
61912-ZWZ		85	13	1	17	15.1	7500	9000	64.5	80.5	1	0.20
16012-ZWZ			11	0.6	19.1	16.5			64	91	0.6	0.27
6012-ZWZ		95	18	1.1	30	23	6700	8000	66.5	88.5	1	0.42
6212-ZWZ	80	110	22	1.5	53	36	5600	7100	68	102	1.5	0.79
6312-ZWZ		130	31		82	50	5300	6300	71	119		1.75
6412-ZWZ		150	35	2.1	107	68.5	4800	5600		139	2	2.72

总目录

目录

使用说明

螺钉

螺栓

螺柱

铆接类

组合件

螺母

垫圈

挡圈

树脂类

带挡块

螺钉

柱塞

紧固件

进口专区

紧固件

专用配件

经济型

轴承

标准型

轴承

进口型

轴承

品牌轴承

带座轴承

吊环

索具

电子焊接

工具

手动工具

电动工具

气动工具

储存工具

量具

刀具

技术资料

型号	d	D	B	r ₁ (mm)	基本额定负载(KN)		极限转速(r/min)		安装尺寸			重量(Kg) 参考
					Cr(动)	Cor(静)	脂润滑	油润滑	d _a (mm)	D _a (max)	r _a (max)	
61913-ZWZ		90	13	1	19.9	17.5	6700	8000	70	85		0.20
6013-ZWZ		100	18	1.1	32	25	6300	7500	71.5	93.5	1	0.43
6213-ZWZ	65	120	23	1.5	57	40	5300	6300	73	112	1.5	1.00
6313-ZWZ		140	33		95	59.5	4800	5600		129		2.10
6413-ZWZ		160	37	2.1	118	78.5	4500	6300	76	149	2	3.21
6014-ZWZ		110	20	1.1	38	30	6000	7000	76.5	103.5	1	0.62
6214-ZWZ		125	24	1.5	61.2	43.2	5000	6000	78	117	1.5	1.12
6314-ZWZ	70	150	35	2.1	107	68	4500	5300	81	139	2	2.57
6414-ZWZ		180	42	3	136	100	3800	4500	83	167	2.5	4.54
61915-ZWZ		105	16	1	26.5	23.5			80	100	1	0.35
16015-ZWZ		115	13	0.6	29	26	5600	6700	81.5	108.5	0.6	0.55
6015-ZWZ		115	20	1.1	38	31					1	0.63
6215-ZWZ	75	130	25	1.5	66	50	4800	5600	83	122	1.5	1.21
6315-ZWZ		160	37	2.1	113	77	4300	5000	86	149	2	3.03
6415-ZWZ		190	45	3	146	107	3600	4300	88	177	2.5	5.88
61816-ZWZ		100	10	0.6	12.7	13.3	6000	7000	83.2	96.8	0.6	0.15
61916-ZWZ		110	16	1	27.5	25	5600	6700	85	105	1	0.35
16016-ZWZ			14	0.6	32	30			84	121	0.6	0.60
6016-ZWZ		125					5300	6300				
6216-ZWZ	80		22	1.1	47.5	40			86.5	118.5	1	0.85
6316-ZWZ		140	26	2	71.5	54.5	4500	5300	89	131		1.47
6416-ZWZ		170	39	2.1	125	86.5	3800		91	159	2	3.68
61917-ZWZ		200	48	3	160	122	3400	4500	93	187	2.5	6.84
16017-ZWZ		120	18	1.1	30.3	27	5300	6300	91	114	1	0.56
6017-ZWZ			14	0.6	31.5	30			89	126	0.6	0.64
6217-ZWZ	85	130	22	1.1	47.5	40	5000	6000	91.5	123.5	1	0.94
6317-ZWZ		150	28	2	84	62	4300	5000	94	141	2	1.85
6417-ZWZ		180	41	3	102	96.5	3800	4500	98	167	2.5	4.33
61918-ZWZ		210	52	4	170	132	3200	3800	101	194	3	8.10
6018-ZWZ		125	18	1.1	33	31.5	5000	6000	96.5	118.5	1	0.57
6218-ZWZ	90	140	24	1.5	58.5	50	4800	5600	98	132	1.5	1.15
6318-ZWZ		160	30	2	97	72	3800	4500	99	151	2	2.19
6418-ZWZ		190	43	3	144	108	3400	4000	103	177	2.5	4.97
61819-ZWZ		225	54	4	189	154	3000	3600	106	209	3	9.58
61919-ZWZ		120	13	1	19.3	20.4	5000	6000	99.6	115		0.29
16019-ZWZ		130	18	1.1	33.8	33	4800	5600	101	124	1	0.61
6019-ZWZ			16	1	40.5	39			100	140		0.88
6219-ZWZ	95		24	1.5	78.5	54	4500	5300	103	137	1.5	1.14
6319-ZWZ		170	32	2.1	110	80	3600	4300	106	159	2	2.66
6419-ZWZ		200	45	3	152	118	3200	3800	108	187	2.5	5.84
61820-ZWZ		125	13	1	19.6	21.2	4800	5600	105	120		0.33
61920-ZWZ		140	20	1.1	34.5	35	4500	5300	106.5	133.5	1	0.85
61920M-ZWZ												0.96
16020-ZWZ		150	16	1	43.6	44			108	142		0.92
6020-ZWZ	100		24	1.5	62.4	52.9	4300	5000			1.5	1.15
6220-ZWZ		180	34	2.1	122	93	3400	4000	111	169	2	3.25
6320-ZWZ		215	47	3	173	141	2800	3600	113	202	2.5	7.10
6420-ZWZ		250	58	4	214	184	2600	3400	116	234	3	13.10
6021-ZWZ		160	26	2	73	62.8	4000	4800	114	151		1.65
6221-ZWZ	105	190	36	2.1	135	102	3200	3800	116	179	2	3.85
6321-ZWZ		225	49	3	240	154	2800	3400	118	212	2.5	8.05
61822-ZWZ		140	16	1	24.8	28	4300	5000	115	135		0.51
61922-ZWZ		150	20	1.1	43.5	44.5	4000	4800	116.5	143.5	1	0.89
61922M-ZWZ												1.01
6022-ZWZ	110	170	28	2	82	70.6	3800	4500	119	161		1.92
6222-ZWZ		200	38	2.1	145	114	2800	3400	121	189	2	4.55
6322-ZWZ		240	50	3	195	167	2400	3000	123	227	2.5	9.72
61824-ZWZ		150	16	1	24.5	28	3800	4500	125	145		0.57
61924-ZWZ		165	22	1.1	53	54	3600	4300	126.5	158.5	1	1.21
61924M-ZWZ												1.54
6024-ZWZ	120	180	28	2	85.5	80	3400	4000	129	171		2.09
6224-ZWZ		215	40	2.1	154	130	2800	3400	131	204	2	5.28
6324-ZWZ		260	55	3	217	196	2200	2800	133	247	2.5	12.50
61926-ZWZ		180	24	1.5	65	67	3400	4000	138	172	1.5	1.56
61926M-ZWZ												1.92
6026-ZWZ	130	200	33	2	109	98	3200	3800	139	191	2	3.29
6226-ZWZ		230	40	3	153	134	2600	3200	143	217	2.5	6.33
6326-ZWZ		280	58	4	251	241	2200	2600	146	264	3	15.30
61828M-ZWZ		175	18	1.1	37	40	3400	4000	146.5	168.5	1	1.00
61928M-ZWZ		190	24	1.5	64	67.5	3200	3800	148	182	1.5	2.11
6028-ZWZ	140	210	33	2	106	102	3000	3600	146.5	201	2	3.47
6228-ZWZ		250	42	3	166	150	2400	3000	153	237	2.5	7.41
6328-ZWZ		300	62	4	329	246	2000	2600	156	284	3	18.80
61830M-ZWZ		190	20	1.1	46.4	53	3000	3600	156	184	1	1.50
61930M-ZWZ		210	28	2	84.5	90	2800	3400	159	201		3.04
6030-ZWZ	150	225	35	2.1	123	117	2600	3200	161	214	2	4.07
6230-ZWZ		270	45	3	189	183	2000	2600	163	257	2.5	9.96
6330-ZWZ		320	65	4	360	280	1800	2200	166	304	3	22.20

型号	d	D	B	r ₁ (min)	基本额定负载(KN)		极限转速(r/min)		安装尺寸			重量(Kg) 参考
					Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	D _a (max)	r _a (max)	
61832M-ZWZ	160	200	20	1.1	49.5	59	2600	3200	168	192	1.1	1.32
61932M-ZWZ		220	28	2	89	90			169	211		3.28
6032-ZWZ		240	38	2.1	143	138	2400	3000	171	229	2	5.04
6032M-ZWZ												6.04
6232-ZWZ		290	48	3	210	210	1900	2400	173	277	2.5	12.40
61834M-ZWZ	170	215	22	1.1	65	61	2600	3200	176.5	208.5	1	2.03
61934M-ZWZ		230	28	2	115	100	2400	3000	179	221		3.42
6034-ZWZ		260	42	2.1	161	166	2200	2800	181	249	2	6.86
6034M-ZWZ												7.96
6234-ZWZ		310	52	4	225	240	1900	2400	186	294	3	15.10
61836M-ZWZ	180	225	22	1.1	61.8	79	2400	3000		219	1	2.05
61936M-ZWZ		250	33	2	118	128		2800	189	241		5.07
6036-ZWZ		280	46	2.1	186	196	2200	2600	191	269	2	8.75
6036M-ZWZ												
6236-ZWZ			320	52	4	240	260	1800	2200	196	304	3
61838-ZWZ	190	240	24	1.5	73	94	2200	2800	198	232	1.5	2.63
61838M-ZWZ		260	33	2	127	138						
61938M-ZWZ		290	46	2.1	191	211	2000	2600	201	279	2	9.58
6038M-ZWZ												11.10
6238-ZWZ			340	55	4	265	305	1700	2000	206	324	3
6040-ZWZ	200	310	51	2.1	213	234	1900	2400	211	299	2	11.70
6040M-ZWZ		360	58	4	285	335	1700	2000	216	344	3	14.20
6240-ZWZ												22.30
61844M-ZWZ		270	24	1.5	75	89	1900	2400	227	263	1.5	3.21
61944M-ZWZ		300	38	2.1	148	176			231	289	2	8.37
6044-ZWZ	220	340	56	3	242	284	1800	2200	233	327	2.5	15.50
6044M-ZWZ												18.30
6244-ZWZ		400	65	4	297	365	1500	1800	236	384	3	31.20
61848M-ZWZ		300	28	2	103	116	1800	2200	249	291	2	4.72
61948M-ZWZ		320	38	2.1	155	192			251	309		
6048M-ZWZ	240	360	56	3	255	315	1700	2000	253	347	2.5	20.70
61852M-ZWZ		320	28	2	122	128			269	311	2	4.80
61952M-ZWZ		360	46	2.1	212	269	1600	1900	276	349		
6052M-ZWZ		400	65	4	294	373	1500	1800		384	3	28.40
61960-ZWZ		300	420	3	265	370	1300	1600	313	407	2.5	20.70
61964-ZWZ	320	440	278		395	333			427	24.90		
61968-ZWZ	340	460	282		420	1100	1400	353	447	27.00		
61972-ZWZ	360	480			425			373	467	30.90		
61976-ZWZ	380	520	65		4	335	550	1000	1300	396		504



请按图示订货

型号

61972-ZWZ
61976-ZWZ

未税价(元)

● 优惠价

数量	1~29	30~
价格	100%	另行报价



交货期

7