


法兰型导向轴支座


- 引导型·安装孔通孔
- 加厚引导型·安装孔通孔

引导型·安装孔通孔

代码	类型		材质		表面处理	
			国标	相当		
GAE01	引导型	安装孔通孔	圆法兰型	45	S45C	发黑
GAE02				0Cr18Ni9	SUS304	喷细砂无电解镀锌
GAE06		方法兰型	45	S45C	发黑	
GAE11			0Cr18Ni9	SUS304	喷细砂无电解镀锌	
GAE12		对边法兰型	45	S45C	发黑	
GAE16					0Cr18Ni9	SUS304
GAE21			45	S45C	发黑	
GAE22					0Cr18Ni9	SUS304
GAE26					—	

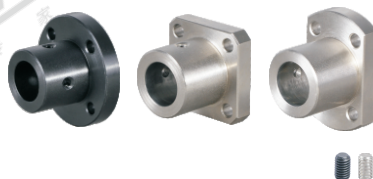

① 如对防锈有要求, 请优先选用不锈钢材质或喷细砂无电解镀锌产品。

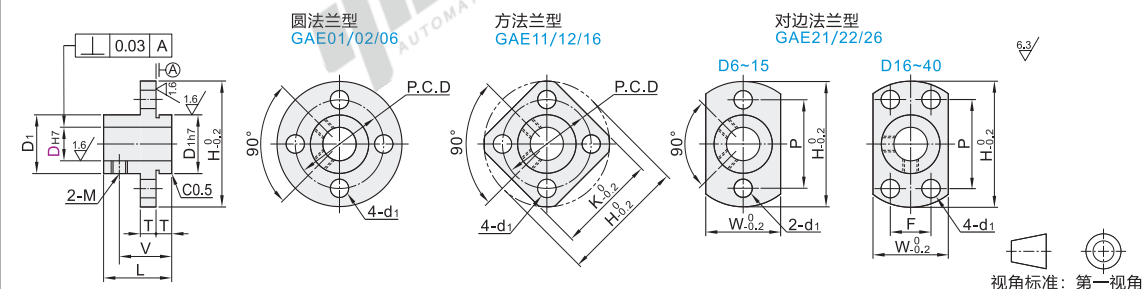

型号			L	D ₁	H	T	V	M	P.C.D	K	W	P	F	d ₁							
圆法兰型 GAE01 GAE02 GAE06	方法兰型 GAE11 GAE12 GAE16	对边法兰型 GAE21 GAE22 GAE26	代码																		
			D _{H7}																		
			6	+0.012 0	15			3.5	12	M3	20	22	12	20		3.5					
			8		18	12	28		15										16		
			8M	+0.015 0				5									M4				
			10			20	14	30		16	M3		22	23	18	22	—	3.5			
			10M																		
			12	+0.018 0	24	16	36		19	M4	26	28	20	26			4.5				
			15		30	20	40	6	22		30	32	24	30							
			16		32	22	42		23		32	33	26	28	16						
			20	+0.021 0		28	50		25	M5	39	39	32	31	22		5.5				
			25		38	33	55	8	29		44	44	37	36	24						
			30			38	66		30		52	52	42	41	27	6.6					
			40	+0.025 0	50	60	90	10	35	M6	75	75	65	65	38	9					


加厚引导型·安装孔通孔

代码	类型	材质	表面处理		附件(2PCS)
			国标	相当	
GAE51	加厚引导型 安装孔通孔	圆法兰型	45	S45C	发黑
GAE52					内六角紧定螺钉
GAE61		对边法兰型			喷细砂无电解镀锌
GAE62					内六角紧定螺钉(不锈钢)



① 如对防锈有要求, 请优先选用喷细砂无电解镀锌产品。

② 特点: 由于固定部壁较厚, 与标准型相比而言, 难以倾倒。

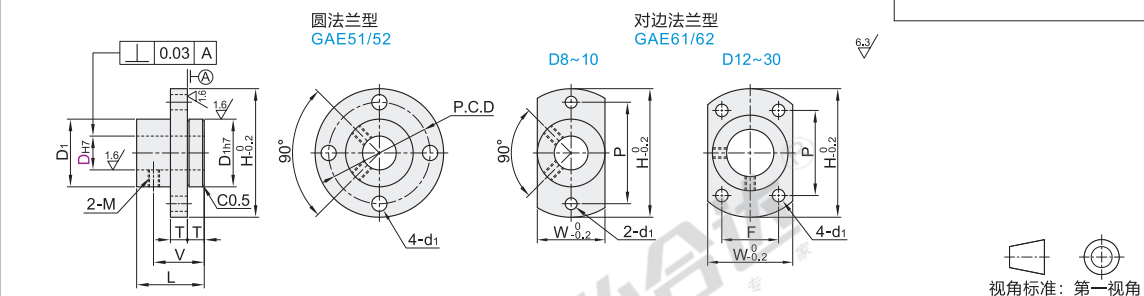

型号			L	D ₁	H	T	V	M	P.C.D	W	P	F	d ₁
代码	D _{H7}												
圆法兰型 GAE51 GAE52	8	+0.015 0	18	15	32	5	15	M3	25	15	25	—	3.5
	8M						M4						
	10	+0.018 0	20	20	38		16	M3	30	20	30		4.5
12	24		22	40	6	19	M4	32	25	28	16		
16	32		28	50		23		40	32	33	22	5.5	
对边法兰型 GAE61 GAE62	20	+0.021 0		35	63	8	25		50	40	42	25	
	25			40	68		28	M5	55	45	45	30	6.6
	30			38	45	73	10	30	M6	60	50	48	35

加厚引导型·安装孔通孔

代码	型号	D _{H7}
GAE51	8	+0.015
GAE52	8M	0
	10	
	10M	



优惠价	数量	1~9	10~
	价格	100%	另行报价

交货期	5
-----	---

