
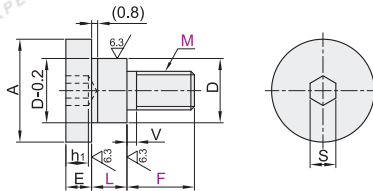

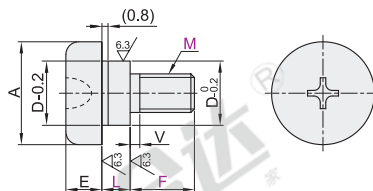


代码					材质		表面处理
超短头型	短头型		圆头螺钉型	十字槽型	国标	相当	
D _{0.2}	D _{0.2}	D _{h7}	D _{0.2}	D _{0.2}			
MJT01	MJT21	MJT31	MJT41	MJT61	45	S45C	发黑
MJT02	MJT22	MJT32	MJT42	MJT62			无电解镀镍
MJT06	MJT26	MJT36	MJT46	MJT66	0Cr18Ni9	SUS304	—

超短头型
MJT01/02/06短头型
MJT21/22/26/31/32/36D外径公差h7时，D外径的表面粗糙度为 $\frac{1}{6}$ ，L公差为 $L(^{+0.1})$ 。圆头螺钉型
MJT41/42/46十字槽型
MJT61/62/66

视角标准：第一视角

超短头型

型号		最小单位1		E	D	A	S	V	h ₁
代码	M	L	F						
MJT01 MJT02 MJT06	3		3~6		5	8	1.5	1	1.5
	4		4~8		6	10	2	1.2	2
	5	5~25	5~12	1.5	8	12	3	1.4	3
	6		6~12		10	16	3	3	
	8		8~15		12	18	4	1.5	3.5
10		10~18		15	20	5		4	

短头型(D外径公差 $\frac{0.2}{2}$)

型号		最小单位1		E	D	A	S	V	h ₁
代码	M	L	F						
MJT21 MJT22 MJT26	3	3~25	3~6	2	5	8	2	1	2
	4		4~8	2.8	6	10	2.5	1.2	2.5
	5		5~12	3.5	8	12	3	1.4	3
	6		6~12	4	10	16	4		3.5
	8		8~15	5	12	18	5	1.5	4
	10		10~15	6	15	20	6		4.5

短头型(D外径公差h7)

代码	型号	L(^{+0.1})		F	E	D _{h7}	A	S	V	h ₁
MJT31 MJT32 MJT36	3	3	4 5 6	3 4 5 6	2	5	8	2	1	2
			7 8	4 5 6						
	4		3 4 5 6 7	4 5 6 8	2.8	6	10	2.5	1.2	2.5
			8	5 6 8						
	5		3 4 5 6 7 8	5 6 8 10	3.5	8	12	3	1.4	3
	6		3 4 5 6 7 10	8 10 12	4	10	16	4	1.5	3.5

圆头螺钉型

型号		最小单位1		E	D	A	S	V	h ₁
代码	M	L	F						
MJT41 MJT42 MJT46	3	5~25	3~6	2.8	5	8	2	1	2
	4		4~8	3.5	6	10	2.5	1.2	2.5
	5		5~12	4.7	8	12	3	1.4	3
	6		6~12	5.6	10	16	4		3.5
	8		8~15	6.2	12	18	5	1.5	4
	10		10~18	6.9	15	20	6		4.5

十字槽型

型号		最小单位1		E	D	A	V
代码	M	L	F				
MJT61 MJT62 MJT66	3		3~6	2.8	5	8	1
	4		4~8	3.5	6	10	1.2
	5	3~25	5~12	4.7	8	12	1.4
	6		6~12	5.6	10	16	
	8		8~15	6.2	12	18	1.5
	10		10~18	6.9	15	20	



代码	技术说明
LD()	变更L尺寸最小单位 选型方法 LD5.5 ① 最小单位0.1 ② LD=5.1~24.9 适用(圆头螺钉型/超短头型) ③ LD=3.1~24.9 适用(短头型(D外径公差 $\frac{0.2}{2}$)/十字槽型) ④ 选型时，须将L变更为LD ⑤ LD值须小于所选型号的L值。



	技术说明																												
增加退刀槽	选型方法PB <table><tr><th>D</th><th>M×P</th><th>g</th><th>f</th></tr><tr><td>5</td><td>3×0.5</td><td>1</td><td>2.3</td></tr><tr><td>6</td><td>4×0.7</td><td>1.2</td><td>3.2</td></tr><tr><td>8</td><td>5×0.8</td><td>1.4</td><td>4.0</td></tr><tr><td>10</td><td>6×1.0</td><td>1.7</td><td>4.8</td></tr><tr><td>12</td><td>8×1.25</td><td></td><td>6.5</td></tr><tr><td>15</td><td>10×1.5</td><td>2</td><td>8.2</td></tr></table>	D	M×P	g	f	5	3×0.5	1	2.3	6	4×0.7	1.2	3.2	8	5×0.8	1.4	4.0	10	6×1.0	1.7	4.8	12	8×1.25		6.5	15	10×1.5	2	8.2
D	M×P	g	f																										
5	3×0.5	1	2.3																										
6	4×0.7	1.2	3.2																										
8	5×0.8	1.4	4.0																										
10	6×1.0	1.7	4.8																										
12	8×1.25		6.5																										
15	10×1.5	2	8.2																										



超短头型

型号		最小单位1	
代码	M	L	F
MJT01	3		3~
MJT02	4	5~25	4~

MJT02 — M4 — 16 — F4

可选加工

型号		最小单位1	
代码	M	L	F
MJT01	3	5~25	3~6
MJT02	4		4~8

MJT02—M4—16—F4—PR

可选加工代码
LD() PB



● 优惠价

数量	1~5	6~
价格	100%	另行报价



交货期
6