

经济型 O 型圈


P 系列

密封圈

C5

代码	材质	硬度(肖氏)	颜色	使用温度范围	用途
E-XTC01	丁腈橡胶	HS65 ⁺¹⁰ ₀	黑色	-10~80℃	耐矿物油用
E-XTC02		HS85 ⁺¹⁰ ₀			
E-XTC21	氟橡胶	HS65 ⁺¹⁰ ₀		-10~200℃	耐高温用
E-XTC22		HS85 ⁺¹⁰ ₀			

① 截面放大图

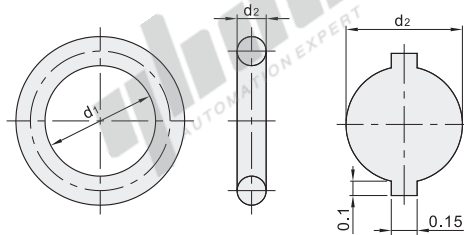

视角标准：第一视角

型号 代码	规格	公称 编号	d2	d1		配合尺寸	
				尺寸	E-XTC01 E-XTC02	E-XTC21 E-XTC22	D
3	P3			2.8			3
4	P4			3.8			4
5	P5			4.8			5
6	P6			5.8	±0.15	±0.2	6
7	P7		1.9±0.1	6.8			7
8	P8			7.8			8
9	P9			8.8			9
10	P10			9.8			10
10A	P10A			9.8			10
11	P11			10.8			11
11.2	P11.2			11			11.2
12	P12			11.8	±0.23	±0.3	12
12.5	P12.5			12.3			12.5
14	P14		2.4±0.12	13.8			14
15	P15			14.8			15
16	P16			15.8			16
18	P18			17.8			18
20	P20			19.8			20
21	P21			20.8			21
22	P22			21.8			22
22A	P22A			21.7			22
22.4	P22.4			22.1			22.4
24	P24			23.7			24
25	P25			24.7	±0.3	±0.4	25
25.5	P25.5			25.2			25.5
26	P26		3.5±0.15	25.7			26
28	P28			27.7			28
29	P29			28.7			29
29.5	P29.5			29.2			29.5
30	P30			29.7			30
31	P31			30.7			31

E-XTC01
E-XTC02
E-XTC21
E-XTC22

型号 代码	规格	公称 编号	d2	d1		配合尺寸	
				尺寸	E-XTC01 E-XTC02	E-XTC21 E-XTC22	D
31.5	P31.5			31.2			31.5
32	P32			31.7			32
34	P34			33.7			34
35	P35			34.7			35
35.5	P35.5			35.2			35.5
36	P36			35.7	±0.42	±0.5	36
38	P38			37.7			38
39	P39			38.7			39
40	P40		3.5±0.15	39.7			40
41	P41			40.7			41
42	P42			41.7			42
44	P44			43.7			44
45	P45			44.7			45
46	P46			45.7	±0.5	±0.58	46
48	P48			47.7			48
50	P50			49.7			50
50A	P50A			49.7			50
52	P52			51.6			52
53	P53			52.6			53
55	P55			54.6			55
56	P56			55.6	±0.6	±0.68	56
58	P58			57.6			58
60	P60			59.6			60
62	P62		5.7±0.18	61.6			62
63	P63			62.6			63
65	P65			64.6			65
67	P67			66.6			67
70	P70			69.6	±0.7	±0.85	70
71	P71			70.6			71
75	P75			74.6			75
80	P80			79.6			80

E-XTC01
E-XTC02
E-XTC21
E-XTC22



请按图示订货

型号	公称编号
代码 规格	
E-XTC01 3	P3
E-XTC02 4	P4

E-XTC01—4



未标价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

7