


# 经济型 止推型无油衬套

## 标准型/锥孔型/沉孔型


| 代码     | 类型  | 材质      | 内径公差 | 外径公差 |
|--------|-----|---------|------|------|
| E-OF01 | 标准型 | 高强度黄铜   | E7   | r6   |
| E-OF02 | 止推型 | 锥孔型     | F7   | m6   |
| E-OF03 |     | 镶嵌固体润滑剂 |      |      |




标准型  
E-OF01

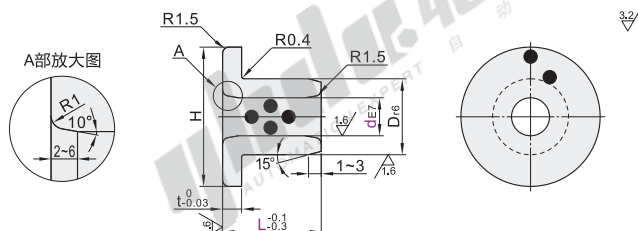

锥孔型  
E-OF02

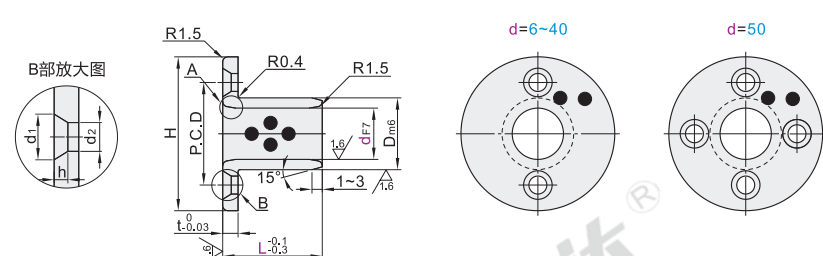

沉孔型  
E-OF03

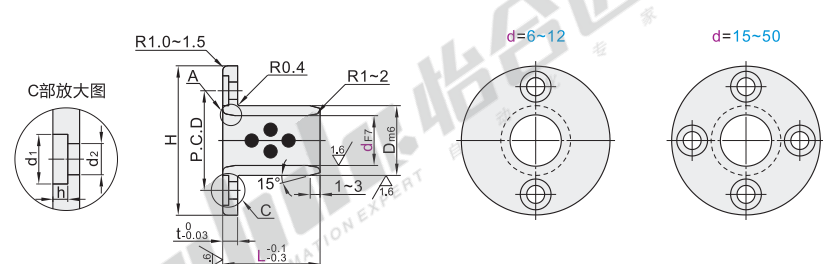

| 型号            | 代码 | dE7              | L                       | Dr6 | H                | t  |
|---------------|----|------------------|-------------------------|-----|------------------|----|
| 标准型<br>E-OF01 | 6  | +0.032<br>-0.026 | 10 12 14                | 12  | 22               |    |
|               | 8  | +0.040<br>-0.040 | 10 12 14 15             | 14  | +0.034<br>-0.023 | 25 |
|               | 10 | +0.025           | 10 12 14 15 20 25       | 16  |                  |    |
|               | 12 |                  | 10 12 14 15 20 25       | 18  |                  |    |
|               | 13 | +0.050           | 12 14 15 20 25          | 19  |                  | 30 |
|               | 15 | +0.032           | 12 14 15 20 25          | 21  | +0.041<br>-0.028 | 35 |
|               | 16 |                  | 12 14 15 20 25 30       | 22  |                  |    |
|               | 18 |                  | 14 15 20 25 30 35 40    | 24  |                  | 40 |
|               | 20 | +0.061<br>-0.040 | 14 15 20 25 30 35 40 45 | 28  |                  | 45 |
|               | 25 |                  | 14 15 20 25 30 35 40 45 | 33  |                  | 50 |
|               | 30 |                  | 15 20 25 30 35 40 45 50 | 38  | +0.050<br>-0.034 | 55 |
|               | 35 | +0.075<br>-0.050 | 15 20 25 30 35 40 45 50 | 44  |                  | 65 |
|               | 40 |                  | 25 30 35 40 45 50       | 50  |                  | 70 |
|               | 50 |                  | 25 30 35 40 45 50 60    | 62  | +0.060<br>-0.041 | 90 |



标准型

| 型号     | 代码 | d        | L  |
|--------|----|----------|----|
| E-OF01 | 6  | 10 12 14 | 15 |

E-OF01—d6—L12



| 数量 | 1~9  | 10~  |
|----|------|------|
| 价格 | 100% | 另行报价 |



7

| 型号            |     |                  | L            | D  | E-OF02 |                |                |     |     |    |    |       |                |                | E-OF03 |                        |           |    |  |   |  |  |  |  |
|---------------|-----|------------------|--------------|----|--------|----------------|----------------|-----|-----|----|----|-------|----------------|----------------|--------|------------------------|-----------|----|--|---|--|--|--|--|
| 代码            | d   | H                |              |    | 安装孔    |                |                |     |     | t  | H  | 安装孔   |                |                |        | 适用内六角薄圆柱头螺钉<br>(需另行采购) |           |    |  | t |  |  |  |  |
|               |     |                  |              |    | P.C.D  | d <sub>1</sub> | d <sub>2</sub> | h   | 沉头  |    |    | P.C.D | d <sub>1</sub> | d <sub>2</sub> | h      |                        |           |    |  |   |  |  |  |  |
| 锥孔型<br>E-OF02 | 6   | 10 12            | 10           | 25 | 15     |                |                |     |     |    | 25 | 17    |                |                |        |                        |           |    |  |   |  |  |  |  |
|               | 8   | +0.033<br>+0.008 | 12           | 28 | 18     |                |                |     |     |    | 27 | 19    | 6              | 3.5            | 2.2    | M3×10(2个)              | 4         |    |  |   |  |  |  |  |
|               | 10  |                  | 15           | 30 | 20     |                |                |     |     |    | 29 | 21    |                |                |        |                        |           |    |  |   |  |  |  |  |
|               | 12  |                  | 12 15 20     | 40 | 28     | 8.5            | 3.5            | 2.5 | M3  | 3  | 36 | 26    |                |                |        | M4×12(2个)              |           |    |  |   |  |  |  |  |
|               | 15  | +0.039           | 12* 15* 20   | 21 |        |                |                |     |     |    | 39 | 29    |                |                |        |                        |           |    |  |   |  |  |  |  |
|               | 16  | +0.011           | 12 15 20*    | 22 | 50     | 35             |                |     |     |    | 40 | 30    | 7.5            | 4.5            | 3      | M4×12(4个)              | 5         |    |  |   |  |  |  |  |
| 沉孔型<br>E-OF03 | 18* |                  | 20           | 42 | 32     |                |                |     |     |    | 42 | 32    |                |                |        |                        |           |    |  |   |  |  |  |  |
|               | 20  | +0.046           | 20* 25 30 40 | 28 |        |                |                |     |     |    | 49 | 38    |                |                |        |                        |           |    |  |   |  |  |  |  |
|               | 25  | +0.015           | 20* 25 30 40 | 33 | 55     | 40             |                |     |     |    | 54 | 43    | 9              | 5.5            | 3.7    | M5×16(4个)              | 6         |    |  |   |  |  |  |  |
|               | 30  |                  | 20 25 30     | 38 | 60     | 45             | 13             | 6   | 3.5 | M5 | 5  | 63    | 50             |                |        |                        |           |    |  |   |  |  |  |  |
|               | 35  |                  | 20 25* 30    | 44 | 70     | 52             |                |     |     |    | 69 | 56    | 11             | 6.6            | 4.2    | M6×20(4个)              | 8         |    |  |   |  |  |  |  |
|               | 40  | +0.055<br>+0.020 | 30 35* 40 45 | 50 | 80     | 60             |                |     |     |    | 82 | 66    |                |                |        |                        |           |    |  |   |  |  |  |  |
|               | 50  |                  | 30 35* 45    | 62 | 100    | 75             | 16             | 7   | 4.5 | M6 | 7  | 94    | 78             | 14             | 9      | 5.2                    | M8×25(4个) | 10 |  |   |  |  |  |  |
|               |     |                  |              |    |        |                |                |     |     |    | 8  | 94    | 78             |                |        |                        |           |    |  |   |  |  |  |  |

① 带\*规格仅适用E-OF03。

② 沉头螺钉需另行采购。