



成对双联角接触球轴承

组合型 · DF面对面配对型

代码	类型	轴承类型 代码	轴承精度	轴承材质		接触角 (°)
				套圈	保持架	
BBE	DF(面对面配对型)	7	P5 P4	SUJ2	TN: 尼龙 T: 胶木	15

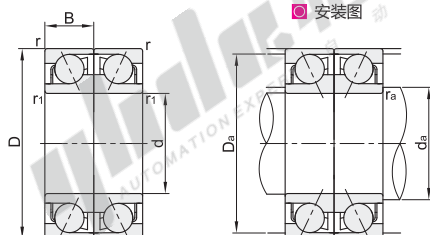

型号		主要尺寸					基本额定负载 (kN)		极限转速 (r/min)		安装尺寸			重量 (kg) 参考
P5精度	P4精度	d	D	B	r	r1	Cr(动)	Cor(静)	脂润滑	油润滑	da (min)	Da (max)	ra (max)	
BBE-706CTNP5DF	—	6	17	6		0.3	4.01	1.65	66500	112000	8	15	0.15	0.012
BBE-708CTNP5DF	—	8	22	7		0.3	6.46	2.94	52500	84000	10	20		0.024
BBE-71800CTP5DF	BBE-71800CTP4DF		19	5	0.3	0.1	3.23	1.67	52500	66500	12	17	0.1	0.01
BBE-71900CTP5DF	BBE-71900CTP4DF		22	6			5.1	2.6	49000	77000	12.5	20.8	0.3	0.02
BBE-7000CTNP5DF	BBE-7000CTNP4DF		26	8		0.3	7.23	3.54	42000	63000		24.8		0.038
BBE-7200CTNP5DF	—		30	9	0.6	0.6	9.95	4.93	39200	59500	15	27.5	0.6	0.064
BBE-71801CTP5DF	BBE-71801CTP4DF		21	5		0.1	3.54	2.01	46900	59500	14	20.2		0.012
BBE-71901CTP5DF	BBE-71901CTP4DF		24	6	0.3	0.3	5.7	3.16	42000	63000		22.8	0.3	0.022
BBE-7001CTNP5DF	BBE-7001CTNP4DF		28	8			8.08	4.42	39200	59500	14.5	26.8		0.042
BBE-7201CTNP5DF	BBE-7201CTNP4DF		32	10	0.6	0.6	13.01	6.63	35000	52500	17	29.5	0.6	0.072
BBE-71802CTP5DF	BBE-71802CTP4DF		24	5		0.1	3.88	2.55	39200	59500		23.2		0.014
BBE-71902CTP5DF	BBE-71902CTP4DF		28	7	0.3	0.3	8.5	4.93	35000	52500		26.8	0.3	0.032
BBE-7002CTNP5DF	BBE-7002CTNP4DF		32	9		0.3	10.54	5.78	33600	49000	17.5	30.8		0.06
BBE-7202CTNP5DF	BBE-7202CTNP4DF		35	11	0.6	0.6	16.41	8.5	31500	46900	20	32.5	0.6	0.09
BBE-71803CTP5DF	BBE-71803CTP4DF		26	5		0.1	3.94	2.72	35000	52500	19	25.2		0.02
BBE-71903CTP5DF	BBE-71903CTP4DF		30	7	0.3	0.3	9.01	5.36	33600	49000		28.8	0.3	0.034
BBE-7003CTNP5DF	BBE-7003CTNP4DF		35	10		0.3	14.71	8.33	30100	44100	19.5	33.8		0.08
BBE-7203CTNP5DF	BBE-7203CTNP4DF		40	12	0.6	0.6	18.36	9.95	26600	39200	22	37.5	0.6	0.13
BBE-71804CTP5DF	BBE-71804CTP4DF		32	7		0.1	6.46	4.51	30100	44100		31.2		0.036
BBE-71904CTP5DF	BBE-71904CTP4DF		37	9	0.3	0.3	12.5	7.74	26600	39200	22.5	35.8	0.3	0.072
BBE-7004CTNP5DF	BBE-7004CTNP4DF		42	12	0.6	0.6	17.68	10.2	25200	37100	25	39.5	0.6	0.136
BBE-7204CTNP5DF	BBE-7204CTNP4DF		47	14	1	1	24.82	13.86	22400	33600	26	42	1	0.208
BBE-71805CTP5DF	BBE-71805CTP4DF		37	7		0.1	7.06	5.44	25200	37100	27	35.5		0.042
BBE-71905CTP5DF	BBE-71905CTP4DF		42	9	0.3	0.3	13.86	9.69	22400	33600	27.5	40.8	0.3	0.086
BBE-7005CTNP5DF	BBE-7005CTNP4DF		47	12	0.6	0.6	24.82	15.56	21000	31500	30	44.5	0.6	0.156
BBE-7205CTNP5DF	BBE-7205CTNP4DF		52	15	1	1	26.52	15.81	19600	30100	31	47	1	0.258
BBE-71806CTP5DF	BBE-71806CTP4DF		42	7		0.1	7.48	6.21	21000	31500	32	40.5		0.05
BBE-71906CTP5DF	BBE-71906CTP4DF		47	9	0.3	0.3	14.71	11.14	19600	30100	32.5	45.8	0.3	0.098
BBE-7006CTNP5DF	BBE-7006CTNP4DF		55	13			25.5	17.34	18200	28000		50		0.23
BBE-7206CTNP5DF	BBE-7206CTNP4DF		62	16	1	1	39.44	24.82	16800	26600	36	57	1	0.394
BBE-71807CTP5DF	BBE-71807CTP4DF		47	7	0.3	0.1	7.91	7.06	18200	28000	37.5	45.5	0.3	0.056
BBE-71907CTP5DF	BBE-71907CTP4DF		55	10	0.6	0.6	20.06	16.15	16800	26600	40	52.5	0.6	0.15
BBE-7007CTNP5DF	BBE-7007CTNP4DF		62	14	1	1	32.3	23.29	15400	25200	41	57		0.306
BBE-7207CTNP5DF	BBE-7207CTNP4DF		72	17	1.1	1.1	43.35	30.6	14000	23800	42	67	1	0.64
BBE-71808CTP5DF	BBE-71808CTP4DF		52	7	0.3	0.1	8.16	7.74	16800	26600	42.5	50.5	0.3	0.062
BBE-71908CTP5DF	BBE-71908CTP4DF		62	12	0.6	0.6	29.92	23.29	15400	25200	45	59.5	0.6	0.218
BBE-7008CTNP5DF	BBE-7008CTNP4DF		68	15	1	1	34.68	27.2	14000	23800	46	63		0.426
BBE-7208CTNP5DF	BBE-7208CTNP4DF		80	18	1.1	1.1	54.4	38.08	12600	21000	47	75	1	0.836
BBE-71809CTP5DF	BBE-71809CTP4DF		58	7	0.3	0.1	12.24	11.82	15400	25200	47.5	56.5	0.3	0.076
BBE-71909CTP5DF	BBE-71909CTP4DF		68	12	0.6	0.6	31.62	26.52	13300	22400	50	66.5	0.6	0.258
BBE-7009CTNP5DF	BBE-7009CTNP4DF		75	16	1	1	46.75	36.04	12600	21000	51	70		0.548
BBE-7209CTNP5DF	BBE-7209CTNP4DF		85	19	1.1	1.1	56.95	41.65	11900	19600	52	80	1	0.936
BBE-71810CTP5DF	BBE-71810CTP4DF		65	7	0.3	0.1	12.5	12.5	13300	22400	52.5	63.5	0.3	0.098
BBE-71910CTP5DF	BBE-71910CTP4DF		72	12	0.6	0.6	32.3	28.22	12600	21000	55	69.5	0.6	0.26
BBE-7010CTNP5DF	BBE-7010CTNP4DF		80	16	1	1	48.45	38.76	11900	19600	56	75		0.586
BBE-7210CTNP5DF	BBE-7210CTNP4DF		90	20	1.1	1.1	73.1	53.55	11200	18200	57	85	1	1.056
BBE-71811CTP5DF	BBE-71811CTP4DF		72	9	0.3	0.1	17.34	17.34	11900	19600	57.5	70.5	0.3	0.158
BBE-71911CTP5DF	BBE-71911CTP4DF		80	13	1	1	38.76	34.68	11200	18200	61	75		0.364
BBE-7011CTNP5DF	BBE-7011CTNP4DF		90	18	1.1	1.1	64.6	52.7	10500	16800	62	85	1	0.86
BBE-7211CTNP5DF	BBE-7211CTNP4DF		100	21	1.5	1.5	79.05	63.75	9800	15400	64	94	1.5	1.376

成对双联角接触球轴承

组合型 · DF面对面配对型

型号		主要尺寸					基本额定负载 (KN)		极限转速 (r/min)		安装尺寸			重量 (kg) 参考	
P5精度	P4精度	d	D	B	r	r ₁	Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	D _a (max)	r _a (max)		
BBE-71812CTP5DF	BBE-71812CTP4DF	60	78	10	0.3	0.1	22.44	22.44	11200	18200	62.5	76.5	0.3	0.202	
BBE-71912CTP5DF	BBE-71912CTP4DF		85	13	1	1	40.8	38.76	10500	16800	66	80	1	0.388	
BBE-7012CTNP5DF	BBE-7012CTNP4DF		95	18	1.1	1.1	66.3	56.95	9800	15400	67	90	1	0.92	
BBE-7212CTNP5DF	BBE-7212CTNP4DF		110	22	1.5	1.5	93.5	74.8	9100	14000	69	104	1.5	1.778	
BBE-71813CTP5DF	BBE-71813CTP4DF	65	85	10	0.6	0.3	22.78	23.8	10500	16800	70	82.5	0.6	0.244	
BBE-71913CTP5DF	BBE-71913CTP4DF		90	13	1	1	41.65	40.8	9800	15400	71	85	1	0.416	
BBE-7013CTNP5DF	BBE-7013CTNP4DF		100	18	1.1	1.1	68	60.35	9100	14000	72	95	1	0.986	
BBE-7213CTNP5DF	BBE-7213CTNP4DF		120	23	1.5	1.5	96.9	81.6	8400	13300	74	114	1.5	2.28	
BBE-71814CTP5DF	BBE-71814CTP4DF	70	90	10	0.6	0.3	23.8	25.5	9800	15400	75	87.5	0.6	0.26	
BBE-71914CTP5DF	BBE-71914CTP4DF		100	16	1	1	56.95	55.25	9100	14000	76	95	1	0.676	
BBE-7014CTNP5DF	BBE-7014CTNP4DF		110	20	1.1	1.1	85	73.1	8400	13300	77	105	1	1.396	
BBE-7214CTNP5DF	BBE-7214CTNP4DF		125	24	1.5	1.5	118.15	99.45	7700	12600	79	119	1.5	2.48	
BBE-71815CTP5DF	BBE-71815CTP4DF	75	95	10	0.6	0.3	24.31	26.52	9100	14000	80	92.5	0.6	0.276	
BBE-71915CTP5DF	BBE-71915CTP4DF		105	16	1	1	57.8	58.65	8400	13300	81	100	1	0.714	
BBE-7015CTNP5DF	BBE-7015CTNP4DF		115	20	1.1	1.1	86.7	79.05	8400	13300	82	110	1	1.496	
BBE-7215CTNP5DF	BBE-7215CTNP4DF		130	25	1.5	1.5	122.4	107.1	7700	12600	84	124	1.5	2.72	
BBE-71816CTP5DF	BBE-71816CTP4DF	80	100	10	0.6	0.3	24.82	28.22	8400	13300	85	97.5	0.6	0.292	
BBE-71916CTP5DF	BBE-71916CTP4DF		110	16	1	1	58.65	61.2	8400	13300	86	105	1	0.752	
BBE-7016CTNP5DF	BBE-7016CTNP4DF		125	22	1.1	1.1	107.1	99.45	7700	12600	87	120	1	1.932	
BBE-7216CTNP5DF	BBE-7216CTNP4DF		140	26	2	2	124.95	115.6	7000	11900	90	134	2	3.26	
BBE-71817CTP5DF	—	85	110	13	1	0.3	36.72	40.8	7700	12600	91	106.5	1	0.514	
BBE-71917CTP5DF	BBE-71917CTP4DF		120	18	1.1	1.1	76.5	79.05	7700	12600	92	115	1	1.068	
BBE-7017CTNP5DF	BBE-7017CTNP4DF		130	22	1.1	1.1	111.35	105.4	7000	11900	92	125	1	2.02	
BBE-7217CTNP5DF	BBE-7217CTNP4DF		150	28	2	2	164.05	144.5	6300	10500	95	144	2	4.08	
BBE-71818CTP5DF	BBE-71818CTP4DF	90	115	13	1	0.3	36.04	40.12	7700	12600	96	111.5	1	0.54	
BBE-71918CTP5DF	BBE-71918CTP4DF		125	18	1.1	1.1	77.35	83.3	7000	11900	97	120	1	1.126	
BBE-7018CTNP5DF	BBE-7018CTNP4DF		140	24	1.5	1.5	130.05	122.4	6650	11200	99	134	1.5	2.68	
BBE-7218CTNP5DF	BBE-7218CTNP4DF		160	30	2	2	207.4	176.8	5950	9800	100	154	2	5.02	
BBE-71919CTP5DF	BBE-71919CTP4DF	95	130	18	1.1	1.1	79.05	86.7	6650	11200	102	125	1	1.182	
BBE-7219CTNP5DF	BBE-7219CTNP4DF		170	32	2.1	2.1	215.9	193.8	5600	9100	107	163	2	6.1	
BBE-71920CTP5DF	BBE-71920CTP4DF		140	20	1.1	1.1	99.45	108.8	6300	10500	107	135	1	1.588	
BBE-7220CTNP5DF	BBE-7220CTNP4DF		180	34	2.1	2.1	224.4	207.4	5250	8400	112	173	2	7.3	
BBE-71921CTP5DF	BBE-71921CTP4DF	100	145	20	1.1	1.1	99.45	108.8	5950	9800	112	140	1	1.652	
BBE-71922CTP5DF	BBE-71922CTP4DF		150	20				113.9	5600	9100		117		145	1.734
BBE-7222CTNP5DF	—		110	200	38	2.1	2.1	277.1	255	4690	7000	122	193	2	10.2
BBE-71924CTP5DF	—			120	165	22	1.1	1.1	124.95	144.5	4900	7700	127	158	0.6
BBE-71926CTP5DF	—	130	180	24	1.5	1.5	147.05	170	4690	7000	139	171	1	3	



请按图示订货

型号
BBE-71924CTP5DF
BBE-71926CTP5DF



未税价(元)

● 优惠价
数量 1~9 10~
价格 100% 另行报价



交货期
5

怡合达®
AUTOMATION EXPERT 自动化专家