


O 型圈

◀ S 系列 / G 系列

代码	类型	材质	硬度(邵氏)	颜色	使用温度范围	用途
XTF01	S系列	丁腈橡胶	HA65 ⁺¹⁰ ₀	黑色	-20~100℃	耐矿物油用
XTF02			HA85 ⁺¹⁰ ₀	黑色	-15~100℃	
XTF11		硅橡胶	HA45 ⁺¹⁰ ₀	半透明色	-40~200℃	耐高温用
XTF12			HA65 ⁺¹⁰ ₀	红褐色	-40~200℃	
XTF21		氟橡胶	HA65 ⁺¹⁰ ₀	黑色	-10~200℃	耐矿物油用
XTF22			HA85 ⁺¹⁰ ₀	黑色	-15~100℃	
XTH01	G系列	丁腈橡胶	HA65 ⁺¹⁰ ₀	黑色	-20~100℃	耐矿物油用
XTH02			HA85 ⁺¹⁰ ₀	黑色	-15~100℃	
XTH11		硅橡胶	HA45 ⁺¹⁰ ₀	半透明色	-40~200℃	耐高温用
XTH12			HA65 ⁺¹⁰ ₀	红褐色	-40~200℃	
XTH21		氟橡胶	HA65 ⁺¹⁰ ₀	黑色	-10~200℃	

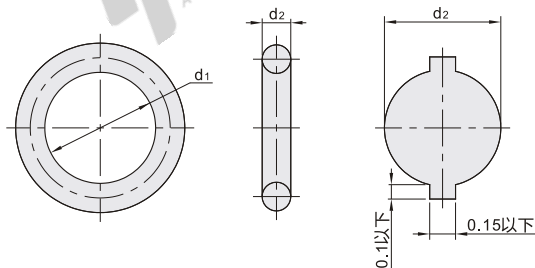

① 截面放大图

视角标准：第一视角

■ S系列(JIS B 2401)

型号		公称 编号	d2	d1				配合尺寸	
代码	规格			尺寸	XTF01 XTF02	XTF11 XTF12	XTF21 XTF22	d1	D
	3	3		2.5				3	5
	4	4		3.5				4	6
	5	5		4.5				5	7
	6	6		5.5				6	8
	7	7		6.5				7	9
	8	8		7.5				8	10
	9	9		8.5				9	11
	10	10		9.5				10	12
	11.2	11.2	1.5±0.09	10.7				11.2	13.2
	12	12		11.5				12	14
	12.5	12.5		12.0				12.5	14.5
	14	14		13.5				14	16
	15	15		14.5				15	17
	16	16		15.5				16	18
	18	18		17.5				18	20
	20	20		19.5				20	22
XTF01	22	22		21.5	±0.14	±0.44	±0.29	22	24
XTF02	22.4	22.4		21.9				22.4	25.4
XTF11	24	24		23.5				24	27
XTF12	25	25		24.5				25 ^{+0.05} _{-0.05}	28
XTF21	26	26		25.5				26	29
XTF22	28	28		27.5				28	31
	29	29		28.5				29	32
	30	30		29.5				30	33
	31.5	31.5		31.0				31.5	34.5
	32	32		31.5				32	35
	34	34	2.0±0.09	33.5				34	37
	35	35		34.5				35	37
	35.5	35.5		35.0				35.5	38.5
	36	36		35.5				36	39
	38	38		37.5				38	41
	39	39		38.5				39	42
	40	40		39.5				40	43
	42	42		41.5				42	45
	44	44		43.5				44	47
	45	45		44.5				45	48
	46	46		45.5	±0.24	±0.74	±0.49	46	49
	48	48		47.5				48	51
	50	50		49.5				50	53

■ G系列(AS568)

型号		公称 编号	d2	d1				配合尺寸	
代码	规格			尺寸	XTH01 XTH02	XTH11 XTH12	XTH21	d1	D
	25	G25		24.4	±0.24	±0.37	±0.29	25	30
	30	G30		29.4	±0.28	±0.43	±0.34	30	35
	35	G35		34.4	±0.32	±0.49	±0.39	35	40
	40	G40		39.4	±0.36	±0.55	±0.44	40	45
	45	G45		44.4	±0.40	±0.61	±0.49	45	50
	50	G50		49.4	±0.44	±0.67	±0.53	50	55
XTH01	55	G55		54.4	±0.48	±0.73	±0.58	55	60
XTH02	60	G60	3.1±0.09	59.4	±0.52	±0.79	±0.63	60 ⁰ _{-0.09}	65 ^{+0.09} ₀
XTH11	65	G65		64.4	±0.56	±0.85	±0.68	65	70
XTH12	70	G70		69.4	±0.60	±0.91	±0.73	70	75
XTH21	75	G75		74.4	±0.64	±0.97	±0.77	75	80
	80	G80		79.4	±0.68	±1.03	±0.82	80	85
	105	G105		104.4	±0.86		±0.86	105	110
	120	G120		119.4	±0.97		±0.97	120	125
	145	G145		144.4	±1.15		±1.15	145	150
	170	G170	5.7±0.09	169.3	±1.32		±1.32	170	180

■ G系列(AS568)

型号		公称 编号
代码	规格	
XTH01	25	G25
XTH02	30	G30

XTH01—25



请按图示订货



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价

交货期
5