



带肩型·外螺纹型 大头/小头锥角型

定位销

P尺寸指定型		P.L.B尺寸指定型		材质		硬度	表面处理
圆型	多棱型	圆型	多棱型	国标	相当		
YDU01	YDU11	YDU21	YDU31	Cr12MoV	SKD11	淬火硬度53~58HRC	—
YDU02	YDU12	YDU22	YDU32			淬火硬度53~58HRC, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
YDU05	YDU15	YDU25	YDU35	0Cr18Ni9	SUS304	—	—
YDU06	YDU16	YDU26	YDU36			镀层硬度850HV~	镀硬铬, 镀层厚度5~8μm
YDU08	YDU18	YDU28	YDU38	9Cr18Mo	SUS440C	淬火硬度48~53HRC	—



来图定制

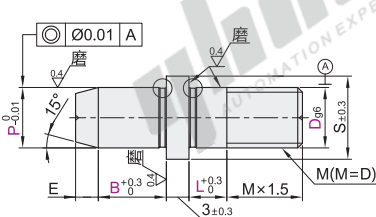

6.3



a=0.4(P=2)
a=0.8(P≥3)
d=0.05(P=2)
d=0.1(P≥3)



视角标准：第一视角

① SUS440C材质的D部加工有识别槽。

● P尺寸指定型

型号		最小单位0.01		L	B	E	S	(W)	M
代码	Dg6	P							
圆型 多棱型 YDU01 YDU11 YDU02 YDU12 YDU05 YDU15 YDU06 YDU16 YDU08 YDU18	3	-0.002 -0.008	2.00~4.00	2	5	1	6	1	M3
	4	-0.004 -0.012	2.00~5.00					1.2	M4
	5	-0.005 -0.014	3.00~6.00	3	6	2	8	1.5	M5
	6	-0.006 -0.017	4.00~7.00					1.8	M6
	8	-0.007 -0.020	5.00~9.00	5	8		11	2.2	M8
	10	-0.008 -0.020	7.00~11.00			3	13	3	M10
	12	-0.009 -0.020	7.00~12.00				15	3.2	M12
	16	-0.017 -0.020	13.00~16.00	8	10	4	19	4	M16
	20	-0.020	16.00~20.00	10	15	5	23	5.5	M20

● P.L.B尺寸指定型

型号		最小单位0.01		最小单位1	最小单位0.1	E	S	(W)	M
代码	Dg6	P	L	B					
圆型 多棱型 YDU21 YDU31 YDU22 YDU32 YDU25 YDU35 YDU26 YDU36 YDU28 YDU38	3	-0.002 -0.008	2.00~4.00	2~8		1	6	1	M3
	4	-0.004 -0.012	2.00~5.00	2~10	2.0~10.0			1.2	M4
	5	-0.005 -0.014	3.00~6.00	3~12		2	8	1.5	M5
	6	-0.006 -0.017	4.00~7.00	3~12	2.0~12.0			1.8	M6
	8	-0.007 -0.020	5.00~9.00	5~12	2.0~15.0		11	2.2	M8
	10	-0.008 -0.020	7.00~11.00	5~17	2.0~20.0	3	13	3	M10
	12	-0.009 -0.020	7.00~12.00	8~17			15	3.2	M12
	16	-0.017 -0.020	13.00~16.00	8~22	5.0~20.0	4	19	4	M16
	20	-0.020	16.00~20.00	10~22		5	23	5.5	M20



可选加工

代码	技术说明
HC()	增加平面 加工肩部2个平面
RC	变更颈部退刀槽为R0.5

代码	技术说明
EC()	变更E尺寸



请按图示订货

● P尺寸指定型

代码	D	P
YDU01	3	2~5
YDU02	4	2~5

YDU01—D3—P3

● P.L.B尺寸指定型

代码	D	P	L	B
YDU21	3	2~5	2~10	2~10
YDU22	4	2~5	2~10	2~10

YDU21—D3—P3—L3—B5

● 可选加工

代码	D	P	L	B	可选加工代码
YDU21	3	2~5	2~10	2~10	EC() HC() RC
YDU22	4	2~5	2~10	2~10	

YDU21—D3—P3—L3—B5—RC



未税价(元)

数量	1~4	5~
价格	100%	另行报价



① 无表面处理/无硬度



① 无表面处理



① 有表面处理

夹具用衬套

A6