



双列角接触球轴承

◀ 无防尘盖式

品牌	轴承类型 代码	轴承精度	轴承材质		接触角(°)
			主体	保持架	
HRB	3	P0	SUJ2	TN: 尼龙	30°



安装图

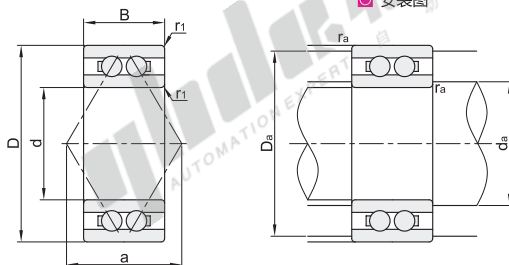

视角标准：第一视角

型号	d	D	B	r1 (min)	额定载荷(KN)		极限转速(r/min)		作用点a	安装尺寸			重量(kg) 参考
					Cr(动)	Cor(静)	脂润滑	油润滑		da(min)	Da(max)	ra(max)	
3200ATN-HRB	10	30	14.3	0.6	7.59	4.4	16000	22000	15	15	25		0.051
3201ATN-HRB	12	32	15.9		10.3	5.63	15000	20000	17	17	27		0.061
3202ATN-HRB	15	35			11.3	6.85	12000	17000	18	20	30	0.6	0.066
3203ATN-HRB	17	40	17.5	1	14.2	8.8	10000	15000	20	22	35		0.097
3303ATN-HRB		47	22.2		20.5	12.1	9500	14000	24	23	41		0.177
3204ATN-HRB	20		20.6	1	19.1	12.2	9000	13000		26			0.152
3305ATN-HRB	25	62	25.4	1.1	28.9	19.4	7500	10000	31	32	55	1	0.349
3206ATN-HRB	30		23.8	1	28.6	20.5	7000	9500		36	56		0.292
3207ATN-HRB	35	72	27	1.1	35.4	26.2	6000	8000	36	42	65		0.448
3210ATN-HRB	50	90	30.2		45.1	38.8	4800	6300	45	57	83		0.706
3214ATN-HRB	70	125	39.7		80.5	73.8	3400	4500	62	79	116	1.5	1.79
3216ATN-HRB	80	140	44.4	2	98	81.5	3000	4000	69	90	130	2	2.21

1Kg=9.81N



请按图示订货

型号

3200ATN-HRB
3201ATN-HRB



未税价(元)

优惠价

数量 1~9 10~
价格 100% 另行报价



交货期

7