


高度支撑销

无肩型·内螺纹型 夹具用·锥角R型


代码	类型	材质		硬度	
		国标	相当		
YKM41	内螺纹型	圆型	9CrWMn	SKS3	淬火硬度58~61HRC
YKM42			20CrMo	SCM420	渗碳淬火硬度58~62HRC
YKM91	多棱型	多棱型	9CrWMn	SKS3	淬火硬度58~61HRC
YKM92			20CrMo	SCM420	渗碳淬火硬度58~62HRC



圆型
YKM41
YKM42

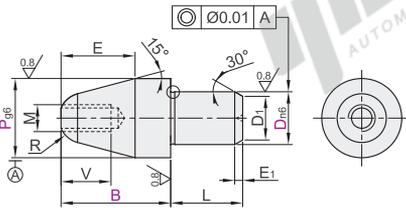

多棱型
YKM91
YKM92

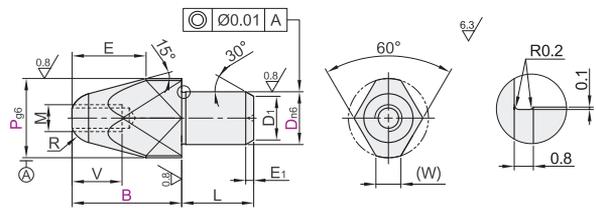

① $D_1 = D - E_1 \cdot \tan 30^\circ \cdot 2$

② 工艺孔加工条件: $D \neq P$ 且 $(D \cdot P \cdot L \cdot B) \geq 4$ 。(工艺孔详细尺寸见产品简介)



代码	型号		P _{g6}	B	L	E	E ₁	R	(W)		M	V
	D _{n6}	D							仅YKM91/92			
圆型 YKM41 YKM42	3*	+0.010 +0.004	5	-0.004 -0.012	8 10	3	5	0.5	1.5			
	4*	+0.016 +0.008	6		10 12	4	6		1.8			
多棱型 YKM91 YKM92	6		8	-0.005 -0.014	11.4 17.4	6	7.4		2.5	2.5		
	7	+0.019 +0.010	10		13.7 21.7	7	9.7	1	3	3	M2.5	5
	8		12	-0.006 -0.017	16 24	8	12	1.5	3.5	3.5	M3	6
	12	+0.023 +0.012	16		20 29	12	15	2	5	5	M4	8
	14		20	-0.007 -0.020	25.5 35.5	14	19.5	2.5	6	6	M5	10

③ 带*规格不适用YKM91/92, 带*的规格无内螺纹。



代码	D	P	B
YKM41	3	5	8, 10
YKM42	4	6	10, 12

YKM41—D3—P5—B8



未税价(元)

数量	1~4	5~
价格	100%	另行报价



交货期
5