

代码	类型	材质			颜色	使用温度	
		①主体	②芯线	③齿布			
ECK11	DS5M	闭环型	氯丁橡胶	玻璃纤维线	尼龙帆布	黑色	-30~80°C
	DS8M						
	DS14M						
	DH8M						
	DH14M						

皮带宽度公差

皮带宽度(mm)	公差
10~30	±0.5
31~50	±0.8
51~100	±1.0
101~150	±1.2




特点：以氯丁橡胶为基体、玻纤为抗拉芯线，双向对称齿设计，应用在正反转或多轴协同的工况。

橡胶同步带芯线采用螺旋缠绕的方式排布，分切后会看到芯线层，不影响使用。


代码	齿形	齿距	H	V	h	单位带重 (kg/10mm×1m)
ECK11	DS5M	5	4.25	0.96	1.645	0.034
	DS8M	8	7.48	1.372	3.054	0.06
	DS14M	14	12.36	2.8	4.78	0.11
	DH8M	8	7.9	1.372	3.264	0.06
	DH14M	14	14.84	2.8	6.02	0.11

重量为理论值，与实物可能存在差异，仅供参考。

齿形：DS5M/DS8M/DS14M

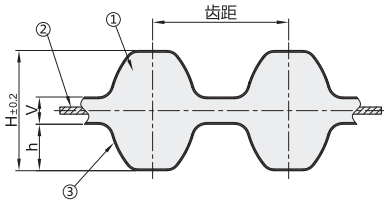

齿形：DH8M/DH14M

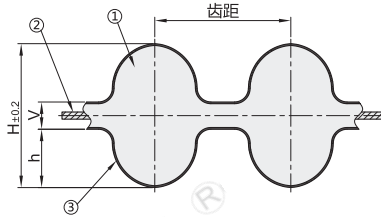

视角标准：第一视角

ECK11-DS5M (齿距:5)

型号	皮带公称宽度	皮带周长	齿数
ECK11-DS5M	100 (10mm)	435	87
		440	88
		445	89
		450	90
		455	91
		460	92
		465	93
		470	94
		475	95
		480	96
	485	97	
	490	98	
	495	99	
	500	100	
	505	101	
	510	102	
	515	103	
	520	104	
	525	105	
	530	106	
535	107		
540	108		
545	109		
550	110		
555	111		
560	112		
565	113		
570	114		
575	115		
580	116		
585	117		
590	118		
595	119		
600	120		
605	121		
610	122		
615	123		
620	124		
625	125		
630	126		
635	127		
640	128		
645	129		
650	130		
655	131		
660	132		
665	133		
670	134		
675	135		
680	136		
685	137		
690	138		

ECK11-DS5M (齿距:5)

型号	皮带公称宽度	皮带周长	齿数
ECK11-DS5M	100 (10mm)	695	139
		700	140
		710	142
		720	144
		725	145
		730	146
		735	147
		740	148
		745	149
		750	150
	755	151	
	760	152	
	765	153	
	770	154	
	775	155	
	780	156	
	785	157	
	790	158	
	800	160	
	810	162	
815	163		
820	164		
825	165		
830	166		
835	167		
840	168		
845	169		
850	170		
860	172		
865	173		
870	174		
875	175		
880	176		
890	178		
900	180		
905	181		
915	183		
920	184		
925	185		
930	186		
935	187		
940	188		
950	190		
960	192		
965	193		
970	194		
975	195		
980	196		
1000	200		
1010	202		
1020	204		
1025	205		

ECK11-DS5M (齿距:5)

型号	皮带公称宽度	皮带周长	齿数
ECK11-DS5M	100 (10mm)	1030	206
		1035	207
		1040	208
		1050	210
		1060	212
		1080	216
		1085	217
		1090	218
		1100	220
		1110	222
	1115	223	
	1120	224	
	1125	225	
	1135	227	
	1145	229	
	1150	230	
	1160	232	
	1165	233	
	1175	235	
	1195	239	
1200	240		
1210	242		
1215	243		
1225	245		
1240	248		
1250	250		
1260	252		
1270	254		
1295	259		
1300	260		
1305	261		
1310	262		
1320	264		
1330	266		
1335	267		
1350	270		
1370	274		
1380	276		
1390	278		
1400	280		
1420	284		
1450	290		
1460	292		
1475	295		
1500	300		
1520	304		
1525	305		
1530	306		
1540	308		
1550	310		
1565	313		
1585	317		

ECK11-DS5M (齿距:5)

型号	皮带公称宽度	皮带周长	齿数
ECK11-DS5M	100 (10mm)	1595	319
		1600	320
		1605	321
		1615	323
		1650	330
		1675	335
		1680	336
		1685	337
		1690	338
		1695	339
	1700	340	
	1715	343	
	1765	353	
	1800	360	
	1945	389	
	1960	392	
	2000	400	
	2100	420	
	2110	422	
	2145	429	
2155	431		
2320	464		
2350	470		
2480	496		
2525	505		
2650	530		
2765	553		
2800	560		
2980	596		
3000	600		
3070	614		
3090	618		
3580	716		

ECK11-DS8M (齿距:8)

型号	皮带公称宽度	皮带周长	齿数
ECK11-DS8M	150 (15mm)	560	70
		568	71
		576	72
		584	73
		592	74
		600	75
		608	76
		616	77
		624	78
		632	79
	640	80	
	648	81	
	656	82	
	664	83	
	672	84	
	680	85	
	688	86	
	696	87	
	704	88	
	712	89	
720	90		
728	91		
736	92		
744	93		
752	94		
760	95		
768	96		
776	97		
784	98		
792	99		
800	100		
808	101		
816	102		
824	103		
832	104		
840	105		
848	106		
856	107		
864	108		
872	109		
880	110		
888	111		
896	112		
904	113		
912	114		
920	115		
928	116		
936	117		
944	118		
952	119		
960	120		
968	121		

ECK11-DS8M (齿距:8)

型号	皮带公称宽度	皮带周长	齿数
ECK11-DS8M	150 (15mm)	448	56
		456	57
		464	58
		472	59
		480	60
	250 (25mm)	488	61
		496	62
		504	63
		512	64
		520	65
	400 (40mm)	528	66
		536	67
		544	68
		552	69

■ ECK11-DS8M(齿距:8)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		976	122
		984	123
		992	124
		1000	125
		1008	126
		1016	127
		1024	128
		1032	129
		1040	130
		1048	131
		1056	132
		1064	133
		1072	134
		1080	135
		1088	136
		1096	137
		1104	138
		1112	139
		1120	140
		1128	141
		1136	142
		1144	143
		1152	144
		1160	145
		1168	146
		1176	147
		1184	148
		1192	149
		1200	150
		1208	151
		1216	152
		1224	153
		1232	154
		1240	155
		1248	156
		1256	157
		1264	158
150	(15mm)	1272	159
		1280	160
		1288	161
250	(25mm)	1296	162
		1304	163
		1312	164
		1320	165
		1328	166
		1336	167
		1344	168
		1352	169
		1360	170
		1368	171
		1376	172
		1384	173
		1392	174
		1400	175
		1408	176
		1416	177
		1424	178
		1432	179
		1440	180
		1448	181
		1456	182
		1464	183
		1472	184
		1480	185
		1488	186
		1496	187
		1504	188
		1512	189
		1520	190
		1528	191
		1536	192
		1544	193
		1552	194
		1560	195
		1568	196
		1576	197
		1584	198
		1592	199
		1600	200
		1608	201
		1616	202
		1624	203
		1632	204
		1640	205
		1648	206
		1656	207

■ ECK11-DS8M(齿距:8)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		1672	209
		1680	210
		1688	211
		1696	212
		1704	215
		1728	216
		1760	220
		1776	222
		1792	224
		1800	225
		1808	226
		1816	227
		1824	228
		1832	229
		1840	230
		1856	232
		1880	235
		1888	236
		1896	237
		1904	238
		1912	239
		1920	240
		1928	241
		1936	242
		1952	244
		1960	245
		2000	250
		2016	252
		2024	253
		2032	254
		2040	255
		2048	256
		2056	257
		2080	260
		2104	263
		2120	265
		2136	267
150	(15mm)	2160	270
		2200	275
		2240	280
250	(25mm)	2248	281
		2256	282
		2272	284
		2288	286
		2296	287
		2304	288
		2320	290
		2400	300
		2416	302
		2432	304
		2440	305
		2448	306
		2464	308
		2496	312
		2504	313
		2520	315
		2528	316
		2536	317
		2560	320
		2600	325
		2624	328
		2680	335
		2704	338
		2736	342
		2760	345
		2800	350
		2848	356
		2880	360
		2904	363
		2920	365
		2928	366
		2944	368
		2960	370
		3000	375
		3048	381
		3120	390
		3200	400
		3264	408
		3280	410
		3304	413
		3360	420
		3400	425
		3440	430
		3600	450
		3680	460
		3720	465

■ ECK11-DS8M(齿距:8)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		3800	475
		3904	488
		4000	500
		4200	525
		4400	550
		4496	562
		4680	585
		4720	590
		5080	635
		5280	660

■ ECK11-DS14M(齿距:14)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		1232	88
		1246	89
		1260	90
		1288	92
		1344	96
		1358	97
		1400	100
		1456	104
		1470	105
		1512	108
		1540	110
		1610	115
		1652	118
		1708	122
		1736	124
		1750	125
		1764	126
		1778	127
		1806	129
		1890	135
		1904	136
		1932	138
		1946	139
		1960	140
		2002	143
		2100	150
		2240	160
		2310	165
		2380	170
		2450	175
		2506	179
		2590	185
		2660	190
		2800	200
		2940	210
		3136	224
		3150	225
		3360	240
		3500	250
		3556	254
		3850	275
		4004	286
		4326	309
		4410	315
		4508	322

■ ECK11-DH8M(齿距:8)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		448	56
		456	57
		464	58
		472	59
		480	60
		488	61
		496	62
		504	63
		512	64
		520	65
		528	66
		536	67
		544	68
		552	69
		560	70
		568	71
		576	72
		584	73
		592	74
		600	75
		608	76
		616	77
		624	78
		632	79
		640	80
		648	81
		656	82
		664	83
		672	84
		680	85
		688	86
		696	87
		704	88
		712	89
		720	90
		728	91
		736	92
200	(20mm)	744	93
		752	94
		760	95
250	(25mm)	768	96
		776	97
		784	98
		792	99
		800	100
		808	101
		816	102
		824	103
		832	104
		840	105
		848	106
		856	107
		864	108
		872	109
		880	110
		888	111
		896	112
		904	113
		912	114
		920	115
		928	116
		936	117
		944	118
		952	119
		960	120
		968	121
		976	122
		984	123
		992	124
		1000	125
		1008	126
		1016	127
		1024	128
		1032	129
		1040	130
		1048	131
		1056	132
		1064	133
		1072	134
		1080	135
		1088	136
		1096	137
		1104	138
		1112	139
		1120	140
		1128	141

■ ECK11-DH8M(齿距:8)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		1136	142
		1144	143
		1152	144
		1160	145
		1168	146
		1176	147
		1184	148
		1192	149
		1200	150
		1208	151
		1216	152
		1224	153
		1232	154
		1240	155
		1248	156
		1256	157
		1264	158
		1272	159
		1280	160
		1288	161
		1296	162
		1304	163
		1312	164
		1320	165
		1328	166
		1336	167
		1344	168
		1352	169
		1360	170
		1368	171
		1376	172
		1384	173
		1392	174
		1400	175
		1408	176
		1416	177
		1424	178
200	(20mm)	1432	179
		1440	180
		1448	181
250	(25mm)	1456	182
		1464	183
		1472	184
		1480	185
		1488	186
		1496	187
		1504	188
		1512	189
		1520	190
		1528	191
		1536	192
		1544	193
		1552	194
		1560	195
		1568	196
		1576	197
		1584	198
		1592	199
		1600	200
		1608	201
		1616	202
		1624	203

☑ ECK11-DH8M(齿距:8)

型号	皮带公称宽度	皮带周长	齿数
1824	228		
1832	229		
1840	230		
1848	231		
1856	232		
1864	233		
1872	234		
1880	235		
1888	236		
1896	237		
1904	238		
1912	239		
1920	240		
1928	241		
1936	242		
1944	243		
1952	244		
1960	245		
1968	246		
1976	247		
1984	248		
1992	249		
2000	250		
2008	251		
2016	252		
2024	253		
2032	254		
2040	255		
2048	256		
2056	257		
2064	258		
2072	259		
2080	260		
2088	261		
2096	262		
2104	263		
2112	264		
2120	265		
2128	266		
2136	267		
2144	268		
2152	269		
2160	270		
2168	271		
2176	272		
2184	273		
2192	274		
2200	275		
2208	276		
2216	277		
2224	278		
2240	280		
2248	281		
2256	282		
2264	283		
2272	284		
2280	285		
2288	286		
2296	287		
2304	288		
2312	289		
2320	290		
2328	291		
2336	292		
2344	293		
2352	294		
2360	295		
2368	296		
2376	297		
2384	298		
2392	299		
2400	300		
2408	301		
2416	302		
2424	303		
2432	304		
2440	305		
2448	306		
2456	307		
2464	308		
2480	310		
2488	311		
2496	312		
2504	313		
2512	314		
2520	315		

☑ ECK11-DH8M(齿距:8)

型号	皮带公称宽度	皮带周长	齿数
2536	317		
2544	318		
2552	319		
2560	320		
2584	323		
2600	325		
2616	327		
2640	330		
2656	332		
2672	334		
2688	336		
2720	340		
2736	342		
2752	344		
2760	345		
2800	350		
2824	353		
2832	354		
2840	355		
2848	356		
2856	357		
2880	360		
2904	363		
2912	364		
2920	365		
2928	366		
2960	370		
2984	373		
3000	375		
3048	381		
3080	385		
3088	386		
3120	390		
3168	396		
3200	400		
3264	408		
3280	410		
3320	415		
3360	420		
3400	425		
3408	426		
3424	428		
3440	430		
3480	435		
3504	438		
3600	450		
3640	455		
3680	460		
3720	465		
3744	468		
3800	475		
3824	478		
3840	480		
4000	500		
4096	512		
4104	513		
4200	525		
4224	528		
4240	530		
4320	540		
4400	550		
4656	582		
4736	592		
4960	620		
5120	640		
8320	1040		

☑ ECK11-DH14M(齿距:14)

型号	皮带公称宽度	皮带周长	齿数
1204	86		
1218	87		
1232	88		
1246	89		
1260	90		
1274	91		
1288	92		
1302	93		
1316	94		
1330	95		
1344	96		
1358	97		
1372	98		
1386	99		
1400	100		
1414	101		
1428	102		
1442	103		
1456	104		
1470	105		
1484	106		
1498	107		
1512	108		
1526	109		
1540	110		
1554	111		
400	1568	112	
(40mm)	1582	113	
600	1610	115	
(60mm)	1624	116	
800	1638	117	
(80mm)	1652	118	
1000	1666	119	
(100mm)	1680	120	
1200	1694	121	
(120mm)	1708	122	
1722	123		
1736	124		
1750	125		
1764	126		
1778	127		
1792	128		
1806	129		
1820	130		
1834	131		
1848	132		
1862	133		
1890	135		
1904	136		
1918	137		
1932	138		
1946	139		
1960	140		
1974	141		
1988	142		
2002	143		
2016	144		
2030	145		
2044	146		
2058	147		
2072	148		
2086	149		
2100	150		
2128	152		
2142	153		

☑ ECK11-DH14M(齿距:14)

型号	皮带公称宽度	皮带周长	齿数
2156	154		
2170	155		
2184	156		
2198	157		
2212	158		
2240	160		
2254	161		
2268	162		
2282	163		
2296	164		
2310	165		
2324	166		
2338	167		
2352	168		
2380	170		
2408	172		
2422	173		
2450	175		
2464	176		
2478	177		
2492	178		
2506	179		
2520	180		
2562	183		
2590	185		
2604	186		
400	2660	190	
(40mm)	2688	192	
600	2716	194	
(60mm)	2730	195	
800	2800	200	
(80mm)	2856	204	
1000	2884	206	
(100mm)	2912	208	
1200	2940	210	
(120mm)	2968	212	
3010	215		
3024	216		
3038	217		
3080	220		
3108	222		
3150	225		
3220	230		
3304	236		
3360	240		
3374	241		
3416	244		
3430	245		
3486	249		
3500	250		
3556	254		
3654	261		
3710	265		
3780	270		
3850	275		
3920	280		
4004	286		
4060	290		
4158	297		
4200	300		
4326	309		
4578	327		
4760	340		
4956	354		
5320	380		

☑ ECK11-DS5M(齿距:5)

型号	皮带公称宽度	皮带周长
ECK11-DS5M	100	435
	150	440

ECK11-DS5M-100-435



● 优惠价  
数量 1~30 31~  
价格 100% 另行报价

交货期	9
-----	---