



减振式联轴器

螺钉夹紧分离型·标准型/加长型 铝合金

代码	类型		材质		附件
			主体	间隔环	
DBN64	螺钉夹紧分离型	标准型	铝合金	HNBR	内六角圆柱头螺钉
DBN65		加长型			

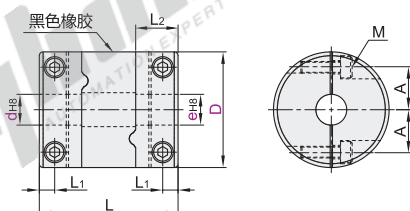

视角标准：第一视角

标准型

型号	d-e					
代码	D					
DBN64	15	d	3	4	4.5	5
		e	5 6	4 5 6	5	5 6
	19	d	4	5	6	6.35
		e	5 8	5 6 7 8	6 6.35 8	8 8
	25	d	5	6	6.35	8
		e	6 8	6 8 10 11 12	8 10	8 10 11 12
	30	d	8	10	11	12
		e	8 10 11 12 14 15	10 11 12 14 15	12	12 14 15
	34	d	8	10	11	12
		e	8 10 11 12 14 15	10 11 12 14 15	11 12	12 14 15 14 15 15 16
	39	d	10	12	14	15
		e	10 11 12 14 15 16	12 14 15 16 19 20	14 15 16	15 16 19 16 17 20
56		d	12	14	15	16
		e	12 14 16 19	14 15 16 19	15 16 19 20	16 19 19 20 20 20

加长型

型号	d-e					
代码	D					
DBN65	15	d	3	5		
		e	5	5 6		
	19	d	4	5	6	6.35
		e	5	5 6 7 8	6 6.35 8	8 8
	25	d	5	6	6.35	8
		e	8 8 10	8 8 10 11 12	10 12	10 12
	30	d	8	10	11	12
		e	8 10 11 12 14 15	10 11 12 14 15	12	14
	34	d	8	10	11	12
		e	8 10 11 12 14	11 14	12 14	15
	39	d	10	12	14	15
		e	10 12 14	14 15	19	

型号		L	L ₁	L ₂	A	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m ²)	静态扭转 刚性 (N·m/rad)	容许安装偏差			重量 (g)
代码	D												径向 (mm)	角向 (°)	轴向 (mm)	
标准型 DBN64	15	23	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	2.7×10 ⁻⁷	43	0.15		±0.2	8
	19	26	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	8.4×10 ⁻⁷	88				14
	25	32	3.25	9.5	9	M2.5	1	4	8	25000	3.0×10 ⁻⁶	170				28
	30	36		11	11	M3	1.5	6.3	12.6	21000	6.9×10 ⁻⁶	220				45
	34	38	4	12	12.25								0.2	1.5	±0.3	65
	39	48	4.5	15.5	14.5	M4	2.5	13.5	27	16000	2.7×10 ⁻⁵	520				98
	44	48	4.75	15	16											136
	56	60	5.5	19.5	20	M5	7	35	70	11000	1.4×10 ⁻⁴	1500				276
加长型 DBN65	15	30	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	3.3×10 ⁻⁷	32	0.15		±0.2	11
	19	34	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	9.7×10 ⁻⁷	77				19
	25	42	3.25	9.5	9	M2.5	1	4	8	25000	3.5×10 ⁻⁶	130				38
	30	42		11	11	M3	1.5	6.3	12.6	21000	7.3×10 ⁻⁶	200		1.5	±0.3	53
	34	44	4	12	12.25								0.2			
	39	55	4.5	15.5	14.5	M4	2.5	13.5	27	16000	2.8×10 ⁻⁵	450				

① 惯性力矩和重量按最大孔计算！

标准型

型号	d-e	
代码	D	
DBN64	25	d 3 4 4.5 5 6
		e 5 8 10 11 12



● 优惠价
数量 1~9 10~
价格 100% 另行报价

未税价(元)

DBN64—D25—d8—e10

交货期
7

联万
轴器
节



请按图示订货