

定位珠



不锈钢型/不锈钢短型 无防松型

❑ 不锈钢型

代码	类型	载荷	主体材质		球头		弹簧材质	使用温度
			材质	硬度	材质	硬度		
ZAF01	不锈钢型	超轻载	SUS304	SUS440C	56HRC~	SUS631J1	-30~260°C	
ZAF06						SUS304	-30~80°C	
ZAF02						SUS440C	-30~260°C	
ZAF07						SUS304	-30~80°C	
ZAF03		重载	SUS440C	-30~260°C				
ZAF08			SUS304	-30~80°C				
ZAF04			SUS440C	-30~260°C				
ZAF21			SUS304	-30~80°C				
ZAF22	树脂球头	超轻载	聚缩醛	—	—	SUS631J1	-30~80°C	
ZAF23						—	—	
ZAF24						—	—	
ZAF24						—	—	



❑ 未进行防松动处理。

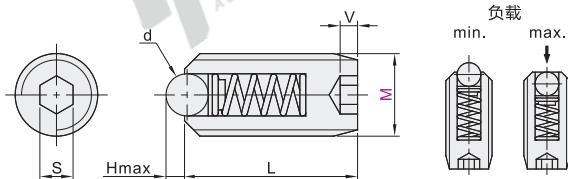

型号 代码	M	金属球头		树脂球头		L	V	S	负载(N)									
		d	H	d	H				超轻载		轻载(ZAF02)		轻载(ZAF22)		重载		超重载	
		min.	max.	min.	max.				min.	max.	min.	max.	min.	max.	min.	max.		
金属球头 树脂球头 ZAF01 ZAF02 ZAF03 ZAF04	3	1.5	0.7	—	—	7	1	1.5	0.3	0.64	1	2	—	—	1.5	2.9	2.2	5
	4	2	0.8	2.4	0.8	9	1.5	2	0.5	1.7	1.8	5	1.9	5	3.8	9.9	2.5	12.5
	5	2.5	0.95	3.2	0.95	12	2	2.5	0.9	3.22	3.2	9.9	2.8	9.9	4.8	19.7	11.2	24.1
	6	3	1.3	4	1.3	13	2.5	3	1.5	4.95	5	15.4	4.8	14.8	9.7	29.5	17.7	33.4
	8	5	1.8	4	1.8	15	3	4	2.3	6.46	5.4	19.2	6.8	19.7	12.6	39.3	21.4	45.3
	10	6	2.2	4.8	2.2	16	3	5	2.9	8.2	8.8	24.2	8.7	24.6	18.5	49.1	23.5	60.7
	12	8	2.8	7.1	2.8	20	3	6	3.4	9.78	10.4	29.4	9.7	29.5	19.5	58.9	24.1	63.7
	16	10	4	9.5	4	25	3	8	5.6	15.9	14.8	49	15.6	49.1	29.3	98.1	43.6	116.3

❑ 树脂球头无M3规格。

kgf=N×0.101972

型号 代码	M	d	H	L	V	S	负载(N)	
							超轻载	重载
ZAF06	4	2.38	0.8	10	1.5	2	1	3
	5	3	1	12	2	2.5	2	4
	6	3.5	1.2	12	2.5	3	3	5
	8	5	1.6	16	4	4	7	7

kgf=N×0.101972

型号 代码	M	d	H	L	V	S	负载(N)	
							轻载	重载
ZAF07	3	1.5	0.5	8	1	1.5	1.5	3
	4	2.38	0.8	10	1.5	2	2	5
	5	3	1	12	2	2.5	3	10
	6	3.5	1.2	12	2.5	3	5	15
	8	5	1.6	16	4	7	20	20
	10	6	2	16	5	9	25	25
	12	8	2.6	20	6	10	30	30
	16	10	3.3	25	8	15	50	50

kgf=N×0.101972

型号 代码	M	d	H	L	V	S	负载(N)	
							轻载	重载
ZAF08	3	1.5	0.5	8	1	1.5	2	5
	4	2.38	0.8	10	1.5	2	3	20
	5	3	1	12	2	2.5	4	30
	6	3.5	1.2	12	2.5	3	5	50
	8	5	1.6	16	4	6	10	60
	12	8	2.6	20	6	12	100	100

kgf=N×0.101972



型号	代码	M	d
ZAF01	4	2	1.5
ZAF01	5	2.5	2

请按图示订货 ZAF01—M4



● 优惠价
数量 1~9 10~
价格 100% 另行报价

未税价(元)



交货期
5

❑ ZAF04/06/07
ZAF08/21/24




交货期
1

❑ 其余

❑ 不锈钢短型

代码	类型	载荷	主体材质		球头		弹簧材质	使用温度
			材质	硬度	材质	硬度		
ZAF31	不锈钢短型	金属球头	超重载	SUS304	SUS304	56HRC~	SUS304	-30~80°C

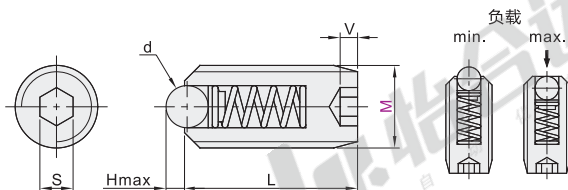

型号 代码	M	d	H	L	V	S	负载(N)	
							min.	max.
ZAF31	3	1.5	0.5	6	1	1.5	2	5
	4	2.38	0.8	6	1.5	2	3	20
	5	3	1	8	2	2.5	4	20
	6	3.5	1.2	8	2.5	3	5	30
	8	5	1.6	10	4	6	40	40

kgf=N×0.101972



型号	代码	M	d
ZAF31	4	2.38	1.5
ZAF31	5	3	2

请按图示订货 ZAF31—M4



● 优惠价
数量 1~9 10~
价格 100% 另行报价

未税价(元)



交货期
5