


带肩铰链销 ◀ 标准型

代码	类型	材质		硬度	表面处理	
		国标	相当			
MIA11	标准型 L尺寸指定型	45	S45C	—	发黑	
MIA12				40~45HRC		
MIA13				—	无电解镀锌	
MIA14				40~45HRC		
MIA15				40~45HRC 镀层硬度850HV~	镀硬铬,镀层厚度3~5μm	
MIA21				0Cr18Ni9 SUS304		
MIA31				—	48~53HRC	—
MIA32				9Cr18 SUS440C	40~45HRC 镀层硬度850HV~	



适用标准: GB/T 882-2008

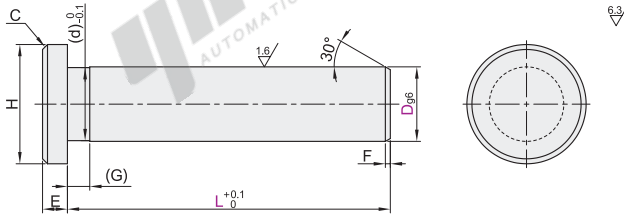

视图标准: 第一视角

代码	型号		L 最小单位0.1	(d)	E	H	C	F	(G)
	D _{g6}								
MIA11 MIA12 MIA13 MIA14 MIA15 MIA21 MIA31 MIA32	3	-0.002 -0.008	5.0~60.0	2.9	1	5	0.5	1	
	4	-0.004 -0.012	10.0~60.0	3.9	1.6	6			
	5	-0.005 -0.014	10.0~110.0	4.9	2	8			
	6	-0.005 -0.014	10.0~110.0	5.8	3	10			
	8	-0.005 -0.014	15.0~110.0	7.8	3	14			
	10	-0.005 -0.014	15.0~110.0	9.8	3	18			
	12	-0.006 -0.017	15.0~220.0	11.8	4	20			
	14	-0.006 -0.017	15.0~220.0	13.8	4	22			1.5
	16	-0.006 -0.017	15.0~220.0	15.8	4.5	25	1.6	3	
	18	-0.006 -0.017	15.0~220.0	17.8	5	28			
	20	-0.006 -0.017	20.0~220.0	19.8	5	30			
	22	-0.007 -0.020	20.0~220.0	21.8	5.5	33			
	24	-0.007 -0.020	20.0~220.0	23.8	6	36			
	27	-0.007 -0.020	20.0~220.0	26.8	6	40			
	30	-0.009 -0.025	30.0~220.0	29.8	8	44			
	33	-0.009 -0.025	30.0~220.0	32.7	8	47	2	4	
	36	-0.009 -0.025	30.0~220.0	35.7	8	50			
	40	-0.009 -0.025	30.0~220.0	39.7	8	55			2
	45	-0.009 -0.025	30.0~220.0	44.7	9	60			
	50	-0.009 -0.025	30.0~220.0	49.7	9	66			

悬臂铰链销

A5



代码	D	L
MIA11	3	5.0~60.0
MIA12	4	5.0~60.0

MIA11 — D3 — L12



未税价(元)

数量	1~9	10~
价格	100%	另行报价



MIA11/13/21



MIA31



MIA12/14/15/32

