


# 深沟球轴承

## ◀ 双面带防尘盖式

C&U



品牌	轴承精度	轴承游隙	后置代码	轴承材质	
				国标	相当
C&U	P0	标准游隙(CN/C0)	ZZ(双面带防尘盖式)	GCr15	SUJ2

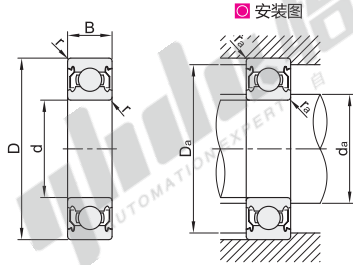

视角标准：第一视角

型号	主要尺寸(mm)				基本额定载荷(KN)		极限转速 (rpm)	安装相关尺寸(mm)				重量 (g) 参考	
	d	D	B	r(min)	Cr(动)	Cor(静)		da(min)	da(max)	Da(max)	ra(max)		
683ZZ-C&U	3	7	3	0.1	0.39	0.13	68000	3.9	4.1	5.8	0.1	0.33	
693ZZ-C&U		8			0.55	0.18	63000	4.4	6.8	0.61			
623ZZ-C&U		10			0.64	0.22	58000	4.2	8.8	1.6			
684ZZ-C&U	4	9	4	0.15	0.71	0.28	57000	5	5.2	7.8	0.1	0.76	
694ZZ-C&U		11			0.96	0.35	52000	5.2	6.4	9.8		2	
604ZZ-C&U		12			0.96	0.35	51000	5.6	6.6	10.4		2.3	
624ZZ-C&U	5	13	5	0.2	1.34	0.52	49000	6.2	6.2	11.4	0.2	3.5	
634ZZ-C&U		16			2.81	1.06	44000	6	7.6	14		0.3	5.1
685ZZ-C&U		11			0.72	0.28	43000	6.2	6.8	9.8		0.15	1.1
695ZZ-C&U	6	13	4	0.2	1.07	0.42	47000	7.6	6.9	11.4	0.2	2.4	
605ZZ-C&U		14			1.08	0.44	46000	6.6	7.4	12.4		0.2	3.5
625ZZ-C&U		16			1.34	0.52	44000	7	7.6	14		0.3	4.8
635ZZ-C&U	7	19	6	0.3	2.81	1.06	40000	8.2	9.5	17	0.3	8	
686ZZ-C&U		13			1.08	0.44	46000	7	7.2	11.8		0.15	1.9
696ZZ-C&U		15			1.47	0.6	44000	7.6	7.8	13.4		0.2	3.8
606ZZ-C&U	8	17	6	0.2	2.27	0.84	42000	9	8.6	15	0.3	6	
626ZZ-C&U		19			2.24	0.91	40000	8	9.5	17		0.3	8.1
687ZZ-C&U		14			1.18	0.51	44000	8.2	8.7	12.8		0.15	2.1
697ZZ-C&U	9	17	5	0.15	1.61	0.72	41000	10	10	15	0.3	5.2	
607ZZ-C&U		19			2.22	0.90	40000	9	10.4	17		0.3	8
627ZZ-C&U		22			3.30	1.37	37000	9	12.2	20		0.3	13
688ZZ-C&U	10	16	5	0.2	1.61	0.71	41000	10.6	10	14.4	0.2	3.1	
698ZZ-C&U		19			2.62	1.06	39000	10	10.6	17		0.3	7.3
608ZZ-C&U		22			3.30	1.37	37000	10	12.2	20		0.3	12
628ZZ-C&U	11	24	8	0.3	3.34	1.42	36000	10.6	12.1	22	0.2	17	
689ZZ-C&U		17			1.35	0.66	39000	10.6	10.7	15.4		0.2	3.2
699ZZ-C&U		20			2.48	1.37	38000	11	11.6	18		0.3	8.2
609ZZ-C&U	12	24	7	0.3	3.30	1.45	36000	11	13.1	22	0.3	14	
629ZZ-C&U		26			4.58	1.97	35000	13	13.9	22		0.3	20
61700ZZ-C&U		15			0.86	0.44	12000	10.8	—	14.2		0.1	2
61800ZZ-C&U	13	19	5	0.1	1.83	0.93	38000	12	12.5	17	0.3	5	
61900ZZ-C&U		22			2.7	1.27	36000	12	13	20		0.3	9
6000ZZ-C&U		26			4.55	1.97	34000	12	13.5	24		0.3	18
6200ZZ-C&U	14	30	9	0.3	5.1	2.39	30000	14	16	26	0.6	32	
6300ZZ-C&U		35			8.1	3.45	27000	14	17	31		0.6	53
61701ZZ-C&U		18			1.1	0.7	9500	13.6	13.8	16.4		0.2	2
61801ZZ-C&U	15	21	5	0.2	1.92	1.04	35000	14	14.5	19	0.3	6	
61901ZZ-C&U		24			2.89	1.46	32000	14	15	22		0.3	11
16001ZZ-C&U		28			5.1	2.37	30000	14	—	26		0.3	19
6001ZZ-C&U	16	8	7	0.3	—	—	—	—	—	—	0.3	22	
6201ZZ-C&U		32			6.82	3.06	26000	16	16	28		0.6	37
6301ZZ-C&U		37			9.7	4.2	24000	17	18.5	32		1	60
61702ZZ-C&U	17	21	4	0.2	0.94	0.58	7600	16.6	16.8	19.4	0.2	3	
61802ZZ-C&U		24			2.1	1.25	31000	17	17.5	22		0.3	7
61902ZZ-C&U		28			4.3	2.3	28000	17	17.5	26		0.3	16
16002ZZ-C&U	18	32	8	0.3	5.6	2.84	26000	17	—	30	0.3	25	
6002ZZ-C&U		35			7.6	3.7	23000	19	19	30		0.3	30
6202ZZ-C&U		35			7.6	3.7	23000	19	19	30		0.3	30
6302ZZ-C&U	19	42	13	1	11.4	5.43	21000	20	20	37	1	82	
61703ZZ-C&U		23			1	0.66	6700	18.6	18.8	21.4		0.2	3
61803ZZ-C&U		24			2.1	1.25	31000	17	17.5	22		0.3	7
61903ZZ-C&U	20	26	5	0.3	2.2	1.5	28000	19	19.5	24	0.3	8	
61903ZZ-C&U		30			4.6	2.6	26000	19	20	28		0.3	18
16003ZZ-C&U		35			6	3.25	24000	19	—	33		0.3	32
6003ZZ-C&U	21	10	8	0.3	—	—	—	—	—	—	0.3	39	
6203ZZ-C&U		40			9.57	4.8	21000	21	21	36		0.6	66
6303ZZ-C&U		47			13.6	6.6	19000	22	25	42		1	115
6403ZZ-C&U	22	62	17	1.1	28.8	10.6	16000	23.5	—	55.5	1	270	
6704ZZ-C&U		27			1.04	0.73	5700	21.6	22.3	25.4		0.2	5
61804ZZ-C&U		32			3.5	2.2	25000	22	22.5	30		0.3	19
61904ZZ-C&U	23	37	9	0.3	6.4	3.7	23000	22	24	35	0.3	36	
6004ZZ-C&U		42			9.38	5.03	21000	24	26	38		0.6	69
6204ZZ-C&U		47			12.8	6.6	18000	25	26	42		1	106
6304ZZ-C&U	24	52	15	1.1	15.9	7.8	17000	26.5	28.5	45.5	1	144	
60/22ZZ-C&U		44			9.4	5.05	20000	26	26.5	40		0.6	74
62/22ZZ-C&U		50			12.9	6.8	17000	27	29.5	45		1	117

# 深沟球轴承

## ◀ 双面带防尘盖式

型号	主要尺寸(mm)				基本额定载荷(KN)		极限转速 (rpm)	安装相关尺寸(mm)				重量(g) 参考	
	d	D	B	r(min)	Cr(动)	Cor(静)		da(min)	da(max)	Da(max)	ra(max)		
6705ZZ-C&U	25	32	4	0.2	1.89	1.5	4600	26.6	27.3	30.4	0.2	5	
61805ZZ-C&U		37	7		4.3	2.95	21000		28	35		22	
61905ZZ-C&U		42	9	0.3	7.02	4.53	19000	27	29	40	0.3	42	
16005ZZ-C&U		8	8		7	4.6				45		60	
6005ZZ-C&U			12	0.6	10.07	5.82	18000	29	30	43	0.6	80	
6205ZZ-C&U		15	1	14	7.88	15000	30	32	47		128		
6305ZZ-C&U		17	1.1	20.6	11.2	14000	31.5	35	55.5	1	232		
60/28ZZ-C&U		28	52	12	0.6	12.5	7.4	16000	32	34	48	0.6	98
62/28ZZ-C&U			58	16	1	17.9	9.75	14000	33	35.5	53	1	171
6706ZZ-C&U		30	37	4	0.2	1.14	0.95	3800	31.6	32.3	35.4	0.2	6
61806ZZ-C&U	42		7		4.96	3.62	18000		33	40		26	
61906ZZ-C&U	47		9	0.3	7.24	5	17000	32	34	45	0.3	48	
16006ZZ-C&U	55		55		9.2	6.3	15000			53		91	
6006ZZ-C&U			13	1	13.2	8.27		35	37	50		116	
6206ZZ-C&U	16		1	19.5	11.3	13000		39	57		199		
6306ZZ-C&U	19		1.1	26.7	15	12000	36.5	43	65.5	1	360		
62/32ZZ-C&U	32		65	17	1	20.7	11.6	12000	37	40	60		226
61807ZZ-C&U			47	7	0.3	4.2	3.5	16000	37	38	45	0.3	29
61907ZZ-C&U	35		55	10	0.6	9.6	6.8	15000	39	40	51	0.6	74
6007ZZ-C&U		62	14	1	15.9	10.3	14000	40	42	57	1	155	
6207ZZ-C&U	17	1.1	25.7	15.3	11000	41.5	45	65.5		288			
6307ZZ-C&U	21	1.5	33.5	19.2	10000	43	47	72	1.5	457			
61908ZZ-C&U	40	62	12	0.6	13.7	9.9	13000	44	45	58	0.6	110	
6008ZZ-C&U		68	15	1	16.8	11.5	12000	45	47	63	1	190	
6208ZZ-C&U		80	18	1.1	30.8	19.8	10000	46.5	51	73.5		366	
6308ZZ-C&U		90	23	1.5	40.7	24	9200	48	54	82	1.5	630	
61809ZZ-C&U		58	7	0.3	5.35	4.95		47	48	56	0.3	38	
61909ZZ-C&U			12	0.6	14.1	10.9	12000		51	64		128	
16009ZZ-C&U		75	75	10		15.6	12.2	11000	49		71	0.6	171
6009ZZ-C&U			16	1	19.9	14		50	52.5	70	1	237	
6209ZZ-C&U		19	1.1	31.2	20.3	9200	51.5	55.5	78.5		398		
6309ZZ-C&U		25	1.5	52.8	31.8	8200	53	61.5	92	1.5	814		
61810ZZ-C&U	65	7	0.3	6.58	6.08		52	54	63	0.3	50		
61910ZZ-C&U		12	0.6	16.1	13.1		54	55.5	68	0.6	135		
16010ZZ-C&U	80	80		21.8	16.6	10000			76		175		
6010ZZ-C&U		16	1	21.8	16.6		55	57.5	75	1	261		
6210ZZ-C&U	20	1.1	35	23.2	8300	56.5	60	83.5		454			
6310ZZ-C&U	27	2	62	38.5	7500	59	68.5	101	2	1060			
61811ZZ-C&U	72	9	0.3	9.1	8.5	10000	57	59	70	0.3	83		
61911ZZ-C&U		13	1	15.96	13.25	9600	60	61.5	75	1	180		
6011ZZ-C&U	90	18	1.1	30.9	22.4	9000	61.5	64	83.5		388		
6211ZZ-C&U		21	1.5	43.4	29.2	7600	63	67	92	1.5	601		
6311ZZ-C&U	29	2	71.5	44.6	6800	64	74	111	2	1370			
61812ZZ-C&U	78	10	0.3	9.1	8.7	9400	62	64.5	76	0.3	106		
61912ZZ-C&U		13	1	28.7	17.2	8900	65	66.5	80		193		
6012ZZ-C&U	95	18	1.1	30.7	22.7	8300	66.5	69	88.5	1	414		
6212ZZ-C&U		22	1.5	52.4	35.9	7000	68	75	102	1.5	783		
6312ZZ-C&U	31	2.1	81.8	51.8	6300	71	80.5	119	2	1730			
61813ZZ-C&U	85	10	0.6	11.9	11.5	8700	69	70	81	0.6	128		
61913ZZ-C&U		13	1	17.4	16.1	8200	70	71.5	85	1	206		
16013ZZ-C&U	100	11	0.6	20.5	18.7		69		96	0.6	307		
6013ZZ-C&U		18	1.1	29.2	23.5	7700	71.5	74	93.5	1	421		
6213ZZ-C&U	23	1.5	57.2	40	6500	73	80.5	112	1.5	990			
6313ZZ-C&U	33	2.1	92.7	59.8	5800	76	86	129	2	2080			
61814ZZ-C&U	90	10	0.6	12.2	11.9	8100	74	75.5	86	0.6	137		
61914ZZ-C&U		16	1	23.7	21.1	7700	75	77.5	95		334		
6014ZZ-C&U	110	20	1.1	38.6	30.4	7100	76.5	80.5	104	1	604		
6214ZZ-C&U		24	1.5	62.2	44	6000	78	85	117	1.5	1070		
6314ZZ-C&U	35	2.1	104.1	68	5400	81	92.5	139	2	2520			
61815ZZ-C&U	95	10	0.6	12.5	12.8	7600	79	80	91	0.6	145		
6215ZZ-C&U		130	25	1.5	66.2	49.3	5600	83	90.5	122	1.5	1180	
6315ZZ-C&U	37	2.1	114	76.5	5000	86	99	149	2	3020			
61916ZZ-C&U	110	16	1	25	23.9	6700	85	88	105		373		
6016ZZ-C&U		22	1.1	47.5	39.8	6200	86.5	91.5	119	1	854		
6216ZZ-C&U	26	2	72.7	53	5300	89	95.5	131		1400			
6316ZZ-C&U	39	2.1	90.4	89.6	4700	91	105	159		3590			
61818ZZ-C&U	115	13	1	19	19.7	6300	95	96	110		285		
61918ZZ-C&U		18	1.1	32.8	31.5	6000	96.5	99	119	1	554		
6018ZZ-C&U	140	24	1.5	61.2	50.6	5600	98	102	132	1.5	1020		
6218ZZ-C&U		30	2	96	71.5	4700	99	109	151	2	2150		
6318ZZ-C&U	43	3	142.6	107.2	4200	103	118	177	2.5	4910			
61819ZZ-C&U	120	13	1	20.8	19.8	5900	100	101	115		300		
61919ZZ-C&U		18	1.1	33.7	33.4	5700	102	104	124	1	579		
6019ZZ-C&U	145	24	1.5	60.8	51	5300	103	109	137	1.5	1080		
6219ZZ-C&U		32	2.1	109	82	4400	106	116	159	2	2620		
6319ZZ-C&U	45	3	156.6	121.8	3900		125	187	2.5	5670			
6020ZZ-C&U	150	24	1.5	60.2	54.2	5000	108	110	142	1.5	1150		
6220ZZ-C&U		34	2.1	122	92.7	4200	111	122	169	2	3140		
6320ZZ-C&U	47	3	173	140.2	3700	113	133	202	2.5	7000			



型号  
6320ZZ-C&U



● 优惠价  
数量 1~9 10~  
价格 100% 另行报价

交货期  
7