


经济型深沟球轴承

◀ 无防尘盖式



- ① 出厂前未封入润滑脂，请在使用前封入。
- ② 经济型适合中低转速、低载荷。
- ③ 不承诺品牌。

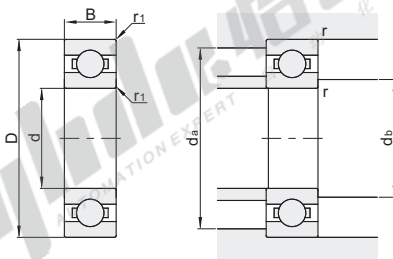

● 轴承类型代码6

代码	轴承型号	d	D	B	r1 (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量 (g) (参考)
						Cr(动) KN	Cor(静) KN		db		da (max)	r (max)	
BAR...-E E-BAR06		10	15	3	0.2	0.85	0.43	15000	10.4	11.21	14.2	0.2	5
			19	5		1.83	0.925	34000		12.5	17		
			22	6	0.3	2.7	1.27	32000	12	13	20	0.3	9
			26	8		4.55	1.96	30000		13.5	24		19
			30	9	0.6	5.1	2.39	24000		16	26	0.6	32
			35	11	1.6	8.1	3.45	22000	14	16.5	31		52
		12	18	4	0.2	0.92	0.53	13000	12.4	13.86	16.7	0.2	3
			21	5		1.92	1.04	32000		14.5	19		6
			24	6	0.3	2.89	1.46	30000	14	15	22	0.3	11
			28	8		5.1	2.39	28000		16	26		21
			32	10	0.6	6.1	2.75	22000	16	17	28	0.6	37
			37	12	1	9.7	4.2	20000	17	18	32	1	60
		15	21	4	0.2	0.93	0.58	11000	15.4	16.86	19.7	0.2	4
			24	5		2.08	1.26	28000		17.5	22		7
			28	7	0.3	3.65	2	26000	17		26	0.3	16
			32	9		5.6	2.83	24000		19	30		30
			35	11	0.6	7.75	3.6	20000	19	20	31	0.6	45
			42	13	1	11.4	5.45	17000	20	22.5	37	1	83
		17	26	5		2.23	1.46	26000		19.5	24		8
			30	7	0.3	4.65	2.58	24000	19	20	28	0.3	18
			35	10		6.8	3.35	22000		21	33		39
			40	12	0.6	9.6	4.6	17000	21	23	36	0.6	66
			47	14	1	13.6	6.65	15000	22	25.5	42	1	113
			62	17	1.1	22.7	10.8	14000	24	—	55		270
		20	27	4	0.2	1.4	0.72	8500	20.4	22.36	25.5	0.2	6
			32	7	0.3	4	2.47	22000		22.5	30	0.3	19
			37	9		6.4	3.7	19000	22	24	35		36
			42	12	0.6	9.4	5.05	18000		26	38	0.6	69
			47	14	1	12.8	6.65	15000	25		42		106
			52	15	1.1	15.9	7.9	14000	26.5	28	45.5	1	145
		25	72	19		28.5	13.9	12000		—	65		400
			37	7	0.3	4.3	2.95	18000	27	28	35	0.3	22
			42	9		7.05	4.55	16000		29	40		42
			47	12	0.6	10.1	5.85	15000	29	30.5	43	0.6	80
			52	15	1	14	7.85	13000	30	32	47	1	128
			62	17	1.1	20.6	11.2	11000	31.5	36	55.5		235
			80	21	1.5	34.5	17.5	10000	33.5	—	71.5	1.5	530
		30	42	7	0.3	4.7	3.65	15000	32	33	40	0.3	26
			47	9		7.25	5	14000		34	45		48
			55	13	1	13.2	8.3	13000	35	37	50	1	116
			62	16		19.5	11.3	11000		39	57		199
			72	19	1.1	26.7	15	9500	36.5	42.5	65.5	1	345
			90	23	1.5	43.5	23.9	8800	38.5	—	81.5	1.5	735
		35	47	7	0.3	4.9	4.05	14000	37	38	45	0.3	29
			55	10	0.6	9.55	6.85	12000	39	40	51	0.6	74
			62	14	1	16	10.3	11000	40	42	57		155
			72	17	1.1	25.7	15.3	9500	41.5	45	65.5	1	288
			80	21		33.5	19.2	8500	43	47	72	1.5	464
			100	25	1.5	55	31	7800	43.5	—	91.5		952
		40	52	7	0.3	5.1	4.4	12000	42	43	50	0.3	33
			62	12	0.6	12.2	8.9	11000	44	45	58	0.6	110
			68	15	1	16.8	11.5	10000	45	47	63		190
			80	18	1.1	29.1	17.8	8500	46.5	51	73.5	1	366
			90	23	1.5	40.5	24	7500	48	53	82	1.5	636
			110	27	2	63.5	36.5	7000	50	—	100	2	1230
		45	68	12	0.6	14.1	10.9	9500	49	50	64	0.6	126
			75	16	1	20.9	15.2	9000	50	53.5	70	1	241
			85	19	1.1	31.5	20.4	7500	51.5	55.5	78.5		420
			100	25	1.5	53	32	6700	53	61.5	92	1.5	829
			120	29	2	77	45	6300	55	—	110	2	1530
		50	72	12	0.6	14.5	11.7	9000	54	55	68	0.6	135
			80	16	1	21.8	16.6	8500	55	57.5	75		261
			90	20	1.1	35	23.2	7100	56.5	60	83.5	1	454
			110	27	2	62	38.5	6000	59	68	101	2	1060
			130	31	2.1	83	49.5	5700	62	—	118		1880

经济型深沟球轴承

◀ 无防尘盖式

● 轴承类型代码6

型号		d	D	B	r ₁ (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量 (g) (参考)
代码	轴承型号					Cr(动) KN	Cor(静) KN		d _b		d _a	r (max)	
									(min)	(max)	(max)		
	6811		72	9	0.3	8.8	8.5	8500	57	59	70	0.3	81
	6911		80	13	1	16	13.3	8000	60	61.5	75		189
	6011		90	18	1.1	28.3	21.2	7500	61.5	64	83.5	1	381
	6211		100	21	1.5	43.5	29.3	6300	63	66.5	92	1.5	619
	6311		120	29	2	71.5	44.5	5600	64	72.5	111	2	1370
	6411		140	33	2.1	89	54	5200	67	—	128		2290
	6812		78	10	0.3	11.5	10.9	8000	62	64	76	0.3	103
	6912		85	13	1	19.4	16.3	7500	65	66	80		192
	6012		95	18	1.1	29.5	23.2	7100	66.5	69	88.5	1	412
	6212		110	22	1.5	52.5	36	5600	68	74.5	102	1.5	783
	6312		130	31	2.1	82	52	5300	71	79	119	2	1720
	6412		150	35	2.1	102	64.5	4800	72	—	138		2770
	6813		85	10	0.6	11.9	12.1	7500	69	69	81	0.6	128
	6913		90	13	1	17.4	16.1	7100	70	71.5	85		218
	6013		100	18	1.1	30.5	25.2	6700	71.5	73	93.5	1	439
	6213		120	23	1.5	57.5	40	5300	73	80	112	1.5	1000
	6313		140	33	2.1	92.5	60	4800	76	85.5	129	2	2110
	6413		160	37	2.1	111	72.5	4400	77	—	148		3300
	6814		90	10	0.6	12.1	12.7	6700	74	74.5	86	0.6	134
	6914		100	16	1	23.7	21.2	6300	75	77.5	95		349
	6014		110	20	1.1	38	31	6000	76.5	80.5	103.5	1	608
	6214		125	24	1.5	62	44	5000	78	84	117	1.5	1090
	6314		150	35	2.1	104	68	4500	81	92	139	2	2570
	6414		180	42	3	128	89.5	4100	84	—	166	2.5	4830
	6815		95	10	0.6	12.5	13.9	6300	79	79.5	91	0.6	149
	6915		105	16	1	24.4	22.6	6000	80	82	100		364
	6015		115	20	1.1	39.5	33.5	5600	81.5	85.5	108.5	1	649
	6215		130	25	1.5	66	49.5	4800	83	90	122	1.5	1190
	6315		160	37	2.1	113	77	4300	86	98.5	149	2	3080
	6415		190	45	3	138	99	3800	89	—	176	2.5	5720
	6816		100	10	0.6	12.7	14.5	6000	84	84.5	96	0.6	151
	6916		110	16	1	25	24	5600	85	87.5	105		391
	6016		125	22	1.1	47.5	40	5300	86.5	91	118.5	1	872
	6216		140	26	2	72.5	53	4500	89	95.5	131	2	1420
	6316		170	39	2.1	123	86.5	4000	91	104.5	159		3670
	6416		200	48	3	164	125	3600	94	—	186	2.5	6760
	6817		110	13	1	18.7	20	5600	90	90.5	105		263
	6917		120	18	1	32	29.6	5300	91.5	94.5	113.5	1	550
	6017		130	22	1.1	49.5	43	5000	94	96	123.5		918
	6217		150	28	2	84	62	4300	94	102	141	2	1760
	6317		180	41	3	133	97	3800	98	110.5	167	2.5	4280
	6417		210	52	4	165	128	3400	103	—	192	3	7950
	6818		115	13	1	19	21	5300	95	95.5	110		276
	6918		125	18	1.1	33	31.5	5000	96.5	98.5	118.5	1	585
	6018		140	24	1.5	58	50	4800	98	103	132	1.5	1190
	6218		160	30	2	96	71.5	4000	99	107.5	151	2	2180
	6318		190	43	3	143	107	3600	103	117	177	2.5	4980
	6819		120	13	1	19.3	22	5000	100	101.5	115		297
	6919		130	18	1.1	33.5	33.5	4800	101.5	103.5	123.5	1	601
	6019		145	24	1.5	60.5	54	4500	103	108.5	137	1.5	1230
	6219		170	32	2.1	109	82	3800	106	114	159	2	2640
	6319		200	45	3	153	119	3000	108	123.5	187	2.5	5760
	6820		125	13	1	19.6	23	4800	105	105.5	120		310
	6920		140	20	1.1	43	42	4500	106.5	111	133.5	1	828
	6020		150	24	1.5	60	54	4300	108	112.5	142	1.5	1290
	6220		180	34	2.1	122	93	3600	111	121.5	169	2	3170
	6320		215	47	3	173	141	2800	113	133	202	2.5	7040
	6420		250	58	4	206	175	2900	118	—	232	3	15000
	6821		130	13	1	19.8	23.9	4800	110	110.5	125		324
	6921		145	20	1.1	42.5	42	4300	111.5	116	138.5	1	856
	6021		160	26	2	72.5	66	4000	114	120	151		1580
	6221		190	36	2.1	133	105	3400	116	127.5	179	2	3790
	6321		225	49	3	184	154	2600	118	138	212	2.5	8090
	6822		140	16	1	28.1	32.5	4300	115	117	135		497
	6922		150	20	1.1	43.5	44.5	4300	116.5	121	143.5	1	893
	6022		170	28	2	85	73	3800	119	124.5	161		1940
	6222		200	38	2.1	144	117	2800	121	134	189	2	4450
	6322		240	50	3	205	179	2400	123	147	227	2.5	9510
	6824		150	16	1	28.9	35.5	4000	125	127	145		537
	6924		165	22	1.1	53	54	3800	126.5	132	158.5	1	1210
	6024		180	28	2	88	80	3600	129	134.5	171		2080
	6224		215	40	2.1	155	131	2600	131	146	204	2	5290
	6324		260	55	3	207	185	2200	133	161	247	2.5	12500
	6826		165	18	1.1	37	44	3600	136.5	138	158.5	1	758
	6926		180	24	1.5	65	67.5	3400	138	144	172	1.5	1570
	6026		200	33	2	106	101	3000	139	148.5	191	2	3260
	6226		230	40	3	167	146	2400	143	157	217	2.5	5960
	6326		280	58	4	229	214	2200	146	175	264	3	15200
	6828		175	18	1.1	38.5	48	3400	146.5	148.5	168.5	1	832
	6928		190	24	1.5	66.5	72	3200	148	153.5	182	1.5	1670
	6028		210	33	2	110	109	2800	149	158.5	201	2	3480
	6228		250	42	3	166	150	2200	153	171.5	237	2.5	7680
	6328		300	62	4	253	246	2000	156	187	284	3	18500
	6830		190	20	1.1	47.5	58.5	3200	156.5	160	183.5	1	1150
	6930		210	28	2	85	90.5	2600	159	166	201		3010
	6030		225	35	2.1	126	126	2600	161	170	214	2	4240

1Kg=9.81N

经济型深沟球轴承

◀ 无防尘盖式

■ 轴承类型代码6

型号		d	D	B	r ₁ (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量 (g) (参考)
代码	轴承型号					Cr(动) KN	Cor(静) KN		d _b		d _a (max)	r (max)	
BAR...-E	6230	150	270	45	3	176	168	2000	163	186	257	2.5	10000
	6330		320	65	4	274	284	1800	166	203	304	3	22700
	6832		200	20	1.1	48.5	61	2600	166.5	170.5	193.5	1	1230
	6932	160	220	28	2	87	96	2400	169	176	211	2	2710
	6032		240	38	2.1	137	135	2400	171	181.5	229		5150
	6232		290	48	3	185	186	1900	173	202	277	2.5	12800
	6332	170	340	68	4	278	287	1700	176	215.5	324	3	26200
	6834		215	22	1.1	60	75	2600	176.5	182	208.5	1	1860
	6934		230	28	2	86	97	2400	179	186	221	2	3340
	6034	260	42	2.1	161	161	2200	181	194.5	249	6890		
	6234	180	310	52	4	212	224	1800	186	215	294	3	15800
	6334		360	72	4	325	355	1600		—	344		36600
	6836		225	22	1.1	60.5	78.5	2400	186.5	192	218.5	1	1980
	6036	190	280	46	2.1	180	185	2000	191	208	269	2	8880
	6236		320	52	4	227	241	1700	196	223	304	3	15900
	6038		290	46	2.1	188	201	2000	201	218	279	2	9390
	6238	200	340	55	4	255	282	1600	206	236	324	3	22300
	6338		400	78	5	355	415	1400	210	—	380	4	49700
	6940		280	38	2.1	143	158	2000	211	222	269	2	7280
	6040	310	51	207		226	1900	231.5		299	12000		
	6240	220	360	58	4	269	310	1500	216	252	344	3	26700
	6340		420	80	5	380	445	1300	220	—	400	4	55300
	6844		270	24	1.5	76.5	107	1900	228	233.5	262	1.5	2900
	6044	240	340	56	3	235	271	1700	233	254.5	327	2.5	18600
	6244		400	65	4	310	375	1300	236	—	384	3	37400
	6948		320	38	2.1	154	190	1700	251	262	309	2	8490
	6952	360	46	204		255	1500	271	—	349	14000		
	6052	260	400	65	4	291	375	1400	276	—	384	3	29400
	6856		350	33	2	133	191	1500	289	—	341	2	7200
	6056		420	65	4	300	410	1300	296	—	404	3	31200
	6960	300	56	3	269	370	313		—	407	2.5	23900	
	6864	320	400	38	2.1	168	244	1200	331	—	389	2	10800
	6964		440	56		3	266	375	333	—	427	2.5	25300
	6072		360	540	82	5	460	720	950	380	—	520	4
6076	380	560	455	725		900	400	—	540	68000			

1Kg=9.81N

■ 轴承类型代码16

型号		d	D	B	r ₁ (min)	基本额定负载(KN)		容许转速 rpm(参考)	安装尺寸			重量(g) (参考)
代码	轴承型号					Cr(动)	Cor(静)		d _b (min)	d _a (max)	r(max)	
E-BAR06	16001	12	28	7	0.3	5.1	2.37	32000	14	26		19
	16002	15	32	8		5.6	2.83	28000	17	30		27
	16003	17	35	8		6	3.25	26000	19	33		33
	16004	20	42	8		7.9	4.45	20000	22	40		48
	16005	25	47	9	0.6	8.85	5.6	18000	27	45		59
	16006	30	55	9		11.2	7.35	15000	32	53		87
	16007	35	62	10		11.7	8.2	13000	37	60		107
	16008	40	68	10		12.6	9.65	12000	42	66		130
	16009	45	75	11	1	14.9	11.4	11000	49	71		167
	16010	50	80	11		15.4	12.4	10000	54	76		175
	16011	55	90	11		19.4	16.3	9000	59	86		257
	16012	60	95	11		20	17.5	8500	64	91		281
	16013	65	100	13	1.1	20.5	18.7	8000	69	96		300
	16014	70	110	13		26.8	23.6	7100	74	106		441
	16015	75	115	14		27.6	25.3	6700	79	111		463
	16016	80	125	14		32	29.6	6300	84	121		621
	16017	85	130	16	1.5	33	31.5	6000	89	126		652
	16018	90	140	16		41.5	39.5	5600	95	135		873
	16019	95	145	16		43	42	5300	100	140		904
	16020	100	150	18		42.5	42	5300	105	145		945
	16021	105	160	18	2	52	50.5	4800	110	155		1240
	16022	110	170	19		57.5	56.5	4500	115	165		1510
	16024	120	180	19		56.5	57.5	4300	125	175		1600
	16026	130	200	22		75.5	77.5	3600	136.5	193.5		2400
	16028	140	210	24	2.1	77.5	82.5	3400	146.5	203.5		2840
	16030	150	225	24		84	91	3000	156.5	218.5		3620
	16032	160	240	25		99	108	2800	168	232		4200
	16034	170	260	28		114	126	2600	178	252		5710
	16036	180	280	31	2	145	157	2400	189	271		7500
	16038	190	290	31		149	168	2400	199	281		7780
	16040	200	310	34		161	180	2200	209	301		10000
	16044	220	340	37		180	217	1600	231	329		13100

1Kg=9.81N



请按图示订货

型号	代码	轴承型号	d
BAR...-E	6700	6800	10

BAR6700-E

型号	代码	轴承型号	d
E-BAR06	16001	16002	15

E-BAR06-16001



未税价(元)

优惠价	数量	1~9	10~
价格	100%	另行报价	

交货期	5
-----	---