


# 双向推力球轴承

## ← 平底座圈型

品牌	轴承类型 代码	轴承精度	轴承材质	
			国标	相当
HRB	5	P0	GCr15	SUJ2

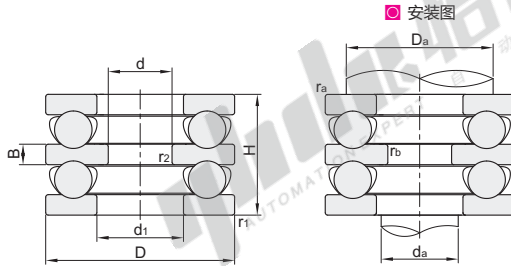

视角标准：第一视角

型号	d	d1 (min)	D	H	B	r1 (min)	r2 (min)	额定载荷(KN)		额定转速(r/min)		安装尺寸				重量(kg) 参考
								Ca(动)	Coa(静)	脂润滑	油润滑	da(min)	Da(max)	ra(max)	rb(max)	
52204-HRB	15	22	40	26	6	0.6	0.3	21.1	23.9	4500	6000	20	28	0.6	0.3	0.14
52205-HRB	20	27	47	28	7			27.7	36.3	4000	5300	25	34			0.21
52206-HRB	25	32	52	29	8	0.6	0.3	29.3	43.8	3600	4800	30	39	0.6	0.3	0.25
52207-HRB	30	37	62	34				39.1	58.6	3000	4000	35	46			0.4
52208-HRB	30	42	68	36	9	0.6	0.3	47	74.1	2800	3800	40	51	0.6	0.3	0.53
52307-HRB	37	44		44	55.4			73.9	2400	3400	35	48	0.68			
52212-HRB	50	62	95	46	10	1	0.6	70.6	133	1900	2800	60	74	0.6	0.3	1.2
52214-HRB	55	72	105	47				76	162	1800	2600	70	88			1.44
52215-HRB	60	77	110	48	12	1	0.6	77.1	172	1700	2400	75	89	1	0.3	1.55
52216-HRB	65	82	115					86.4	193	80	94	1.64				
52217-HRB	70	88	125	55	12	1	0.6	97.9	229	1600	2200	85	101	1	0.3	2.4
52218-HRB	75	93	135	62	14			125	277	1500	2000	90	108			3.2
52220-HRB	85	103	150	67	15	1.1	0.6	155	341	1300	1800	100	125	0.6	0.3	4.2
52222-HRB	95	113	160	131	393			2800	3700	110	130	4.51				

1Kgf=9.81N



型号  
52204-HRB

请按图示订货



未税价(元)

优惠价

数量	1~19	20~
价格	100%	另行报价



交货期

7