

# 单膜片/双膜片

高刚性 铝合金/碳钢

# 膜片免键式联轴器



代码	类型	材质		表面处理	附件
		主体	膜片	主体	
DBL01	免键式	单膜片	铝合金	阳极氧化	外六角螺栓
DBL02			S45C	发黑	
DBL06	双膜片	铝合金	不锈钢	阳极氧化	
DBL07			S45C	发黑	



① 当主体材质是铝合金时，部分产品表面处理为镀珍珠镍，具体请咨询我司工作人员。

单膜片  
DBL01  
DBL02

双膜片  
DBL06  
DBL07

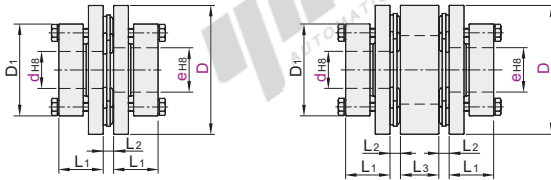

② 偏心、偏角轴向位移如果同时出现多种偏差时，则各种偏差值为容许值的1/2。



型号		d-e										d/e	L1	L2	L3	D1	P.C.D	M	锁紧扭矩 (N·m)					
铝合金 DBL01 DBL06 S45C DBL02	40	d	10	12	14	15	16						10/12											
		e	10 12 14	12 14	14 15 16	15 16	16						14/15/16	18	3.4	10.2			M4	3.5				
铝合金 DBL01 DBL06	65	d	15	16	17	18	19	20	22	24	25	30	35						15					
		e	15 16 17	16 17 18	17 18 19	18 19 20	19 20 22	20 22 24	22 24 25	24 25 30	25 30 35	30 35	35							M5				
			18 19 20	19 20 22	20 22 24	22 24 25	24 25 30	30 35	35															
			22 24 25	24 25 30	25 30 35	30 35	35																	
			30																					
S45C DBL02 DBL07	65	e	15 16 17	16 17 18	17 18 19	18 19 20	19 20 22	20 22 24	22 24 25	24 25 30	25 30 35	30 35	35	24 25	25 30	30 35								
			18 19 20	19 20 22	20 22 24	22 24 25	24 25 30	30 35	35															
铝合金 DBL01 DBL06	87	d	25	30								25												
		e	25 30	30															M6	13.7				
S45C DBL02 DBL07	87	d	25	30	35	38	40	45						25										
		e	25 30 35	30 35 38	35 38	38 40 45	40 45	45																
			38 40	40 45	40 45																			
			30																					

型号		d/e	额定扭矩 (N·m)	容许安装偏差		静态扭转刚性 (N·m/rad)	最高转速 (r/min)	惯性力矩 (kg·m <sup>2</sup> )	重量 (g)		
代码	D			角向(°)	径向(mm)	轴向(mm)					
DBL01	40	10~16	6	1	—	±0.25	15000	10000	1.96×10 <sup>-5</sup>	88	
DBL02			8			±0.5			6300	5.48×10 <sup>-5</sup>	246
DBL06			6			±0.5			6300	2.65×10 <sup>-5</sup>	117
DBL01	65	15~19	20	0.6	—	±0.3	98000	8000	1.61×10 <sup>-4</sup>	248	
DBL06			40			±0.6			47000	2.33×10 <sup>-4</sup>	351
DBL02			60			±0.3			120000	4.53×10 <sup>-4</sup>	695
DBL07			80			±0.6			58000	6.53×10 <sup>-4</sup>	984
DBL01	87	25	200	0.6	—	±0.5	330000	6000	1.68×10 <sup>-3</sup>	1600	
DBL06			250			±1.0			140000	2.49×10 <sup>-3</sup>	2300
DBL02			250			±0.5			330000	1.68×10 <sup>-3</sup>	1600
DBL07			250			±1.0			140000	2.49×10 <sup>-3</sup>	2300

③ 惯性力矩和重量为最大孔径时的值。



型号		d-e
代码	D	
DBL01	65	d 15 16 17 18 20 22 24
DBL06		e 15 16 17 18 20 22 24



优惠价	
数量	价格
1~9	100%
10~	另行报价



DBL01—D65—d15—e16

联万  
轴器

F1