





标准型	带内六角孔型	代码	材质	表面处理
E-MIM01	E-MIP01		40Cr	发黑
E-MIM03	E-MIP03		SCr440	无电镀镍
E-MIM07	E-MIP07		0Cr18Ni9	SUS304
E-MIM11	E-MIP11			



- ① 如对防锈有要求请选用不锈钢或电镀产品。
② 此经济型产品不建议与轴承配合使用。

标准型
E-MIM01/03/07/11

带内六角孔型
E-MIP01/03/07/11

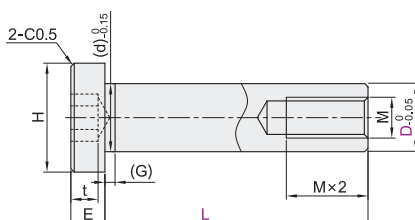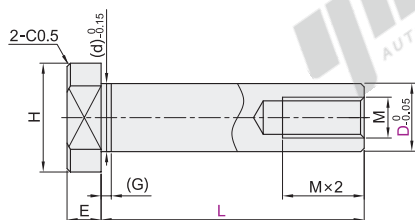

① 直径(d)_{0.015}为参考尺寸。

标准型


型号	D	L	H	W	(d)	(G)	E	M
代码	D	最小单位0.1						
(SCr440)	6	15.0~110.0	10	8	5.8			M3
	8	20.0~110.0	13	10	7.8			M5
	10	20.0~110.0	16	13	9.8			M6
	12	20.0~220.0	18	14	11.8			M8
	13	25.0~220.0			12.8			M10
	14	25.0~220.0			13.8			M12
(SUS304)	15		24	21	14.8	1.5	5	M16
	16				15.8			M10
	17	30.0~220.0			16.8			M12
	18				17.8			M16
	20		27	23	19.8			M12
	22	35.0~220.0			21.8			M16
E-MIM11	25		30	27	24.8			M16

带内六角孔型

型号	D	L	H	E	S	t	(d)	(G)	M
代码	D	最小单位0.1							
(SCr440)	6	15.0~110.0	10		3	2	5.8		M3
	8	20.0~110.0	13		5	3	7.8		M5
	10	25.0~110.0	16				9.8		M6
	12	25.0~220.0	18		6	4	11.8		M8
	13						12.8		M10
	14	30.0~220.0					13.8		M12
(SUS304)	15		24	5			14.8	1.5	M16
	16				8	5	15.8		M10
	17	35.0~220.0					16.8		M12
	18						17.8		M16
	20		27		10	6	19.8		M12
	22	40.0~220.0					21.8		M16
E-MIP11	25	55.0~220.0	30		12	8	24.8		M16



代码	技术说明
LC	变更L尺寸公差 选型方法 LC ① 变更L尺寸公差为±0.04
HA	增加肩部止动面 选型方法 HA ① D=6~8, HA=H/2-1 D=10~25, HA=H/2-2

代码	技术说明																					
MC()	变更螺纹直径 	选型方法 MC2.6 <table><tr><th>D</th><th>MC</th><th>D</th><th>MC</th></tr><tr><td>6</td><td>2.6</td><td>16~18</td><td>6 8</td></tr><tr><td>8</td><td>3 4</td><td>20~22</td><td>8 10</td></tr><tr><td>10~12</td><td>4 5</td><td>25</td><td>10 12</td></tr><tr><td>13~15</td><td>5 6</td><td></td><td></td></tr></table>	D	MC	D	MC	6	2.6	16~18	6 8	8	3 4	20~22	8 10	10~12	4 5	25	10 12	13~15	5 6		
D	MC	D	MC																			
6	2.6	16~18	6 8																			
8	3 4	20~22	8 10																			
10~12	4 5	25	10 12																			
13~15	5 6																					
EE()	变更肩部厚度 	选型方法 EE3 ① 最小单位0.5 ② EE=2~5 ③ 带内六角孔型不适用。																				



标准型	可选项加工
型号 代码 D 最小单位0.1 E-MIM01 6 15.0~110.0 E-MIM03 8 20.0~110.0 E-MIM07 10 20.0~110.0 E-MIM03-D6-L50	型号 代码 D 最小单位0.1 E-MIM01 6 15.0~110.0 E-MIM03 8 20.0~110.0 E-MIM07 10 20.0~110.0 E-MIM03-D6-L50-LC



优惠价
数量 1~49 50~
价格 100% 另行报价



交货期
2



交货期
3

① 无表面处理

② 有表面处理