

欧标40槽宽8.2系列铝合金型材


◀ 边长40/60mm

代码	材质	表面处理
AOB03		黑色氧化
AOB05	A6063-T5	黑色氧化
AMS05		喷砂氧化


- ❗ 切断面未进行氧化处理。
- ❗ 最大使用长度：5800~5850mm；
整条标准长度：6000~6020mm。
- ❗ 可定制表面处理。




📏 L长度公差




📐 槽口详图

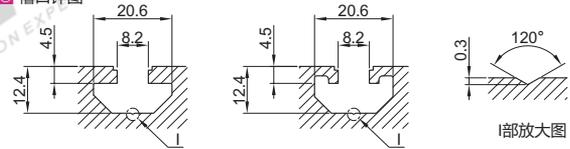


AOB05-4040




AOB05-4040C




AOB03-4040E
AOB05-4040E




AOB05-4040F




AOB03-4040J
AOB05-4040J




AOB05-4040A




AOB05-4040B




AOB05-4040H




AOB05-4040T




AOB05-4040R




AOB03-4040RE
AOB05-4040RE




AOB05-4040XE




AOB05-4430




AOB05-4445




AOB05-4460




AOB05-4040HC
折叠门型材




AMS05-OB40-E




AOB05-4060




AOB05-4060A




AOB05-4080




AOB05-4080C

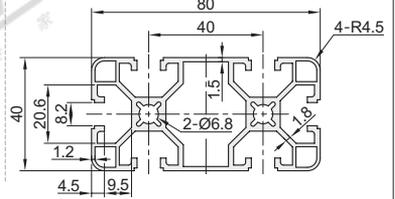


AOB03-4080E
AOB05-4080E




AOB05-4080F

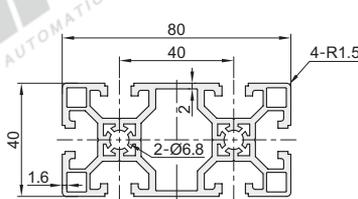


AOB03-4080J
AOB05-4080J

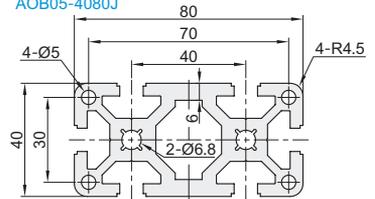


AOB05-4080A

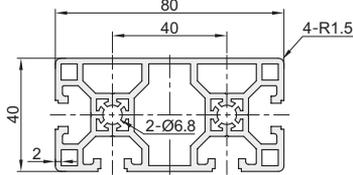


AOB05-4080FA

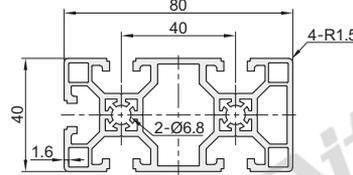


AOB05-4080B

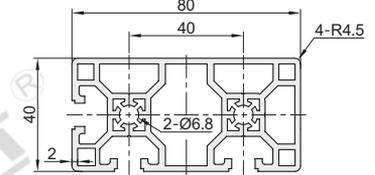


AOB05-4080H

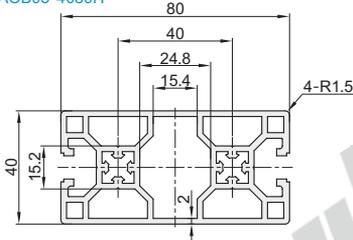


AOB05-40120E

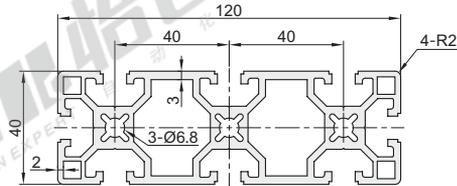


AOB05-40160

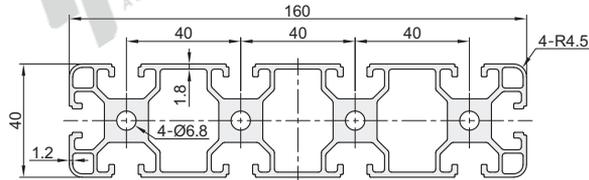


AOB05-40160E

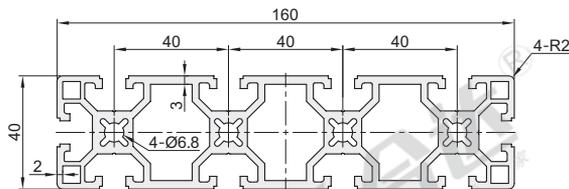

AOB05-40200E

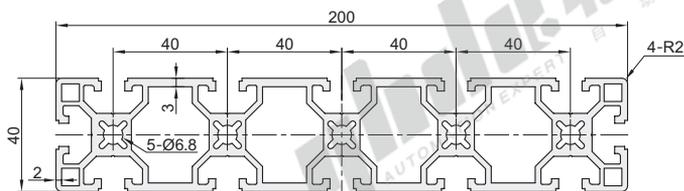


AOB05-8840

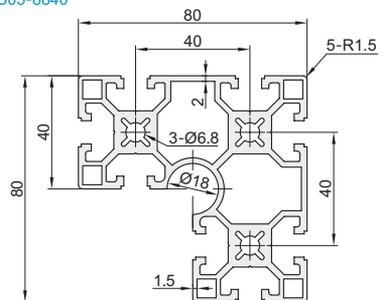


欧标40槽宽8.2系列铝合金型材

◀ 边长80/120mm


AOB05-8840R




AOB05-8840RE




AOB05-8840RF

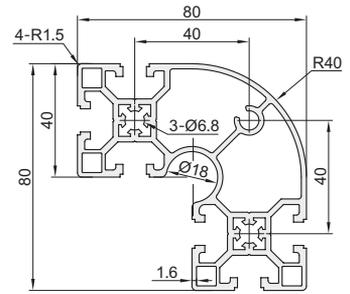


AOB05-8080

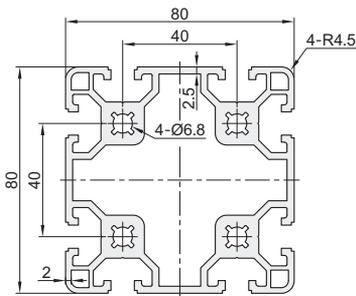


AOB05-8080A

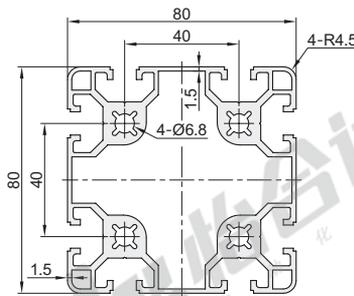


AOB03-8080E
AOB05-8080E

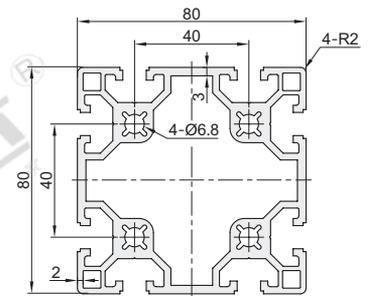


AOB05-8080F

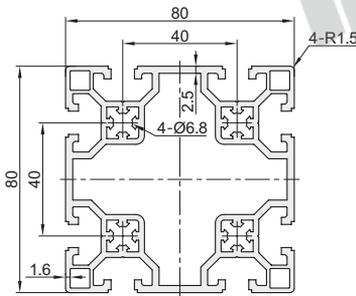


AOB05-8080FA

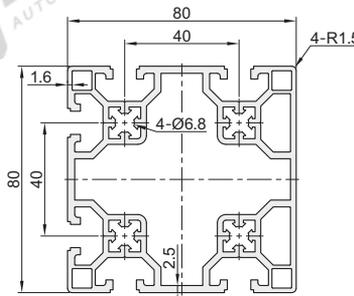


AOB05-8080J

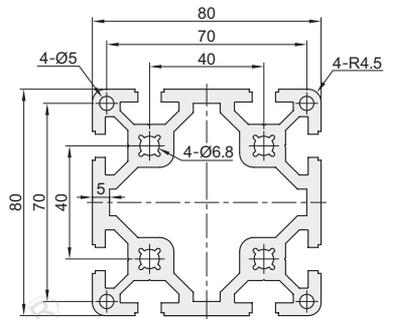


AOB05-8080XE




AOB05-80120E

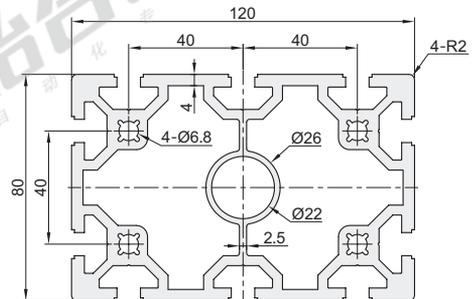


AOB05-80160E

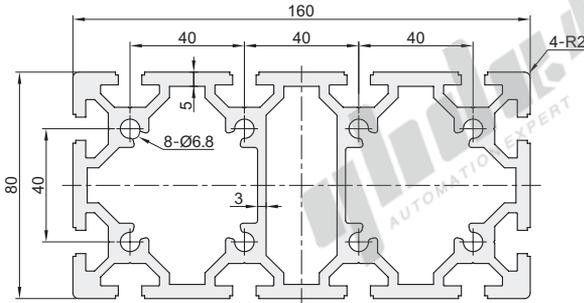


AOB05-120120E

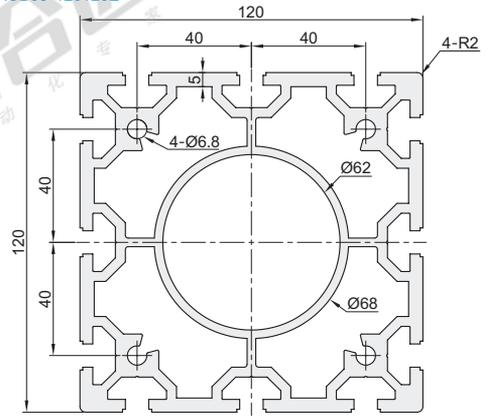


AOB05-120120G

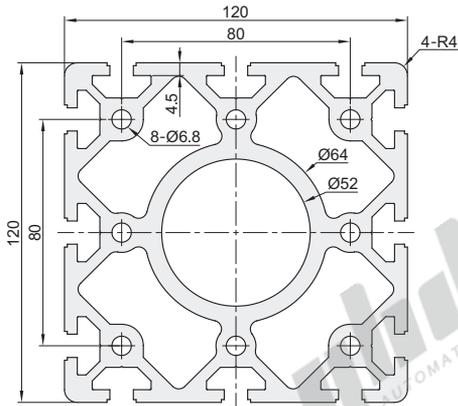

AOB05-160160E

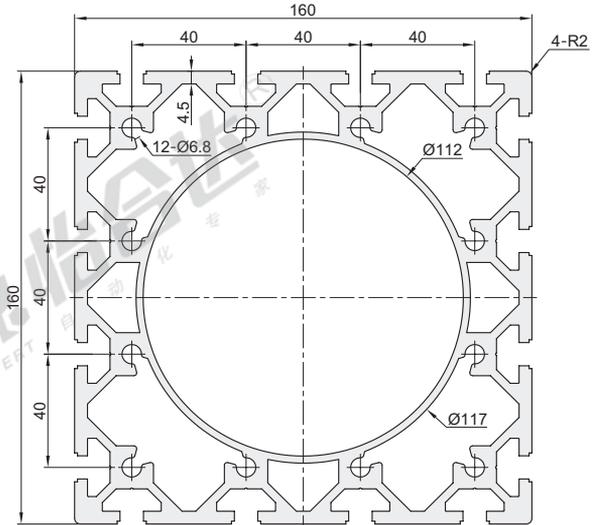


AOB05-200200E

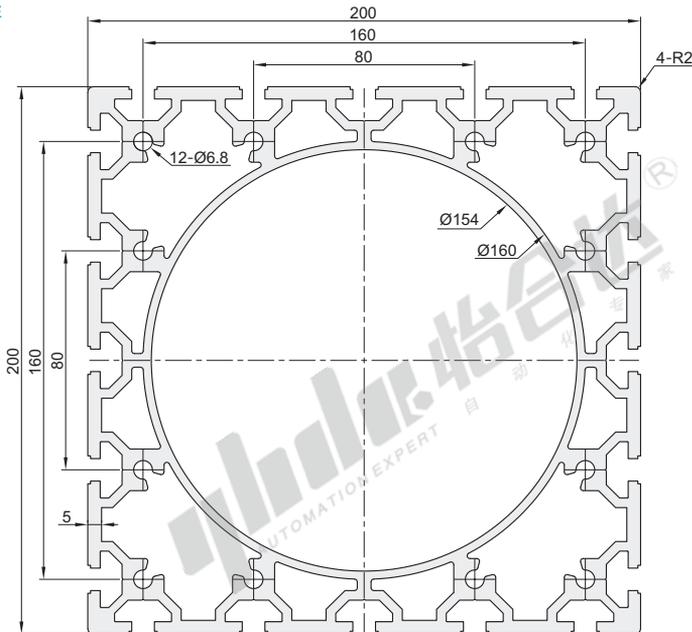

欧标40槽宽8.2系列铝合金型材

◀ 边长200mm

AOB05-80200E

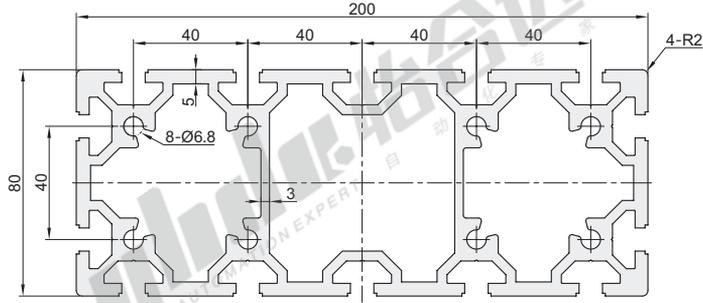

型号	L	截面尺寸	每米重量Kg/m	截面积	截面惯性矩		抗弯截面模数	
代码	规格	最小单位0.5	(理论值)	(mm ²)	I_x	I_y	W_{xmax} (mm ³)	W_{ymax} (mm ³)
AOB03	4040E		1.68	608.10	9.22×10^4	9.22×10^4	4609.80	4609.80
	4040J		2.06	747.69	11.47×10^4	11.47×10^4	5733.10	5733.10
	4040RE		1.50	543.40	7.24×10^4	7.24×10^4	3360.99	3360.99
	4080E		3.01	1094.38	17.79×10^4	66.91×10^4	8893.20	16727.53
	4080J		4.01	1457.63	23.85×10^4	83.36×10^4	11922.55	20838.83
	8080E		4.52	1642.72	119.09×10^4	119.09×10^4	29771.48	29771.48
AOB05	4040		1.65	597.70	8.82×10^4	8.82×10^4	4411.05	4411.05
	4040C		1.19	432.73	6.67×10^4	6.67×10^4	3333.30	3333.30
	4040E		1.68	608.10	9.22×10^4	9.22×10^4	4609.80	4609.80
	4040F		1.48	535.91	8.28×10^4	8.28×10^4	4139.80	4139.80
	4040J		2.06	747.69	11.47×10^4	11.47×10^4	5733.10	5733.10
	4040A		1.62	588.53	8.70×10^4	8.70×10^4	4305.22	4349.35
	4040B		1.64	596.60	8.87×10^4	8.87×10^4	4395.26	4395.26
	4040H		1.60	579.36	8.58×10^4	8.58×10^4	4288.16	4288.16
	4040T		1.60	581.18	8.52×10^4	8.76×10^4	4261.69	4354.76
	4430		1.66	604.06	8.70×10^4	9.17×10^4	3233.92	3492.17
	4445		1.66	603.12	8.75×10^4	9.14×10^4	3126.54	3406.69
	4460		1.67	604.57	8.83×10^4	9.14×10^4	3239.80	3527.88
	4040R		1.50	544.45	7.14×10^4	7.14×10^4	3323.41	3320.92
	4040RE		1.50	543.40	7.24×10^4	7.24×10^4	3360.99	3360.99
	4040XE		1.41	512.62	6.41×10^4	6.41×10^4	2832.74	2832.74
	4060		2.35	855.48	12.72×10^4	26.03×10^4	6357.23	8676.37
	4060A		2.26	822.79	12.58×10^4	25.72×10^4	6235.98	8572.20
	4080		2.99	1085.80	17.45×10^4	65.52×10^4	8722.75	16380.50
	4080C		2.09	760.52	12.80×10^4	47.98×10^4	6399.25	11993.75
	4080E		3.01	1094.38	17.79×10^4	66.91×10^4	8893.20	16727.53
	4080F		2.64	959.18	15.94×10^4	59.55×10^4	7970.60	14887.15
	4080J		4.01	1457.63	23.85×10^4	83.36×10^4	11922.55	20838.83
	4080A		2.70	980.91	17.28×10^4	65.80×10^4	8579.05	16450.77
	4080FA		2.65	960.95	15.89×10^4	60.08×10^4	7944.73	15019.74
	4080B		2.71	982.65	17.22×10^4	66.33×10^4	8553.20	16539.01
	4080H		2.71	984.38	17.651×10^4	65.837×10^4	8825.69	16459.29
	8840		4.00	1453.23	82.20×10^4	82.20×10^4	17810.51	17810.51
	8840R		3.50	1273.25	72.07×10^4	72.07×10^4	16722.25	16772.25
	8840RE		3.57	1298.44	74.69×10^4	74.69×10^4	17466.95	17466.95
	8840RF		3.10	1126.28	65.85×10^4	66.08×10^4	15397.37	15452.46
	8080		4.75	1727.15	119.20×10^4	119.19×10^4	29799.03	29798.58
	8080A		4.08	1482.51	102.13×10^4	102.13×10^4	25532.05	25532.05
	8080E		4.52	1642.72	119.09×10^4	119.09×10^4	29771.48	29771.48
	8080F		4.16	1511.46	108.20×10^4	108.19×10^4	27047.68	27047.68
	8080FA		4.15	1507.71	108.21×10^4	108.21×10^4	27053.94	27053.23
	8080J		6.35	2306.57	159.74×10^4	159.98×10^4	39934.13	39934.13
	8080XE		4.18	1520.24	94.14×10^4	94.14×10^4	21222.00	21222.00
	40120E		4.15	1508.71	26.32×10^4	206.40×10^4	13157.97	34399.97
	40160		4.87	1769.62	26.20×10^4	411.52×10^4	13098.94	51440.23
	40160E		5.41	1965.01	34.90×10^4	467.82×10^4	17451.65	58477.78
	40200E		6.36	2312.88	42.35×10^4	863.63×10^4	21173.95	86363.44
	80120E		7.89	2863.59	223.44×10^4	467.28×10^4	55859.83	77880.10
	80160E		10.29	3739.33	303.04×10^4	1004.90×10^4	75759.18	125611.98
	80200E		12.07	4389.65	396.23×10^4	1877.10×10^4	92306.33	187710.33
120120E		11.03	4011.31	677.34×10^4	677.34×10^4	112889.20	112889.20	
120120G		14.23	5174.84	762.41×10^4	762.41×10^4	127068.48	127068.48	
160160E		16.08	5846.12	1870.81×10^4	1870.81×10^4	233851.01	233851.01	
200200E		21.72	7896.30	4058.42×10^4	4058.42×10^4	405842.00	405842.00	
4040HC		40x40	1.56	565.83	8.17×10^4	9.11×10^4	3879.56	4553.3
AMS05	OB40-E	40x41.5	1.67	605.88	8.35×10^4	8.29×10^4	4105.00	4145.01

☑ 可选加工

☑ 端面螺孔加工



请按图示订货

型号	L	截面尺寸
代码 规格	最小单位0.5	
AOB03 4040E	50<6000	40x40
AOB03-4040E-L550		

型号	L	截面尺寸	可选加工代码
代码 规格	最小单位0.5		
AOB03 4040E	50<6000		LM DM
AOB03-4040E-L550-RM			DM



可选加工

代码	技术说明
	变更通孔为螺孔
	选型方法 LM/RM/DM
LM(左端面)	
RM(右端面)	
DM(双端面)	

① Ø6.8通孔变更为螺孔M8深20.

② 可选加工见P603-608.