


# 活塞杆泛塞封

代码	材质			颜色	用途	工况条件				使用温度范围	使用介质
	主体	弹簧				最高压力(MPa)		最高速度(m/s)			
						动态	静态	往复	旋转		
XTS01	聚四氟乙烯+碳纤维	SUS301	黑色	轴/孔用中低速旋转密封	45	60	15	1	-40~260°C	水、蒸汽、油、原油、普通化学品、石油化学品	



密封圈  
C5

安装图例(开放式沟槽)

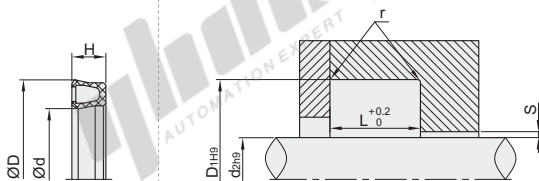

视角标准：第一视角

型号		产品尺寸			安装尺寸									
代码	规格	d	D	H	d <sub>2</sub> 轴径	D <sub>1</sub> 沟槽底径	L 槽宽	r (max)	S径向间隙(max)					
								<2MPa <10MPa <20MPa <40MPa						
XTS01		01	2.6 6.2		3	5.9								
		02	3.6 7.2		4	6.9								
		03	4.6 8.2	2.2	5	7.9	2.4		0.2	0.1	0.08	0.05		
		04	5.6 9.2		6	8.9								
		05	7.6 11.2		8	10.9								
		06	9.2 15.2		10	14.5		0.4						
		07	11.2 17.2		12	16.5								
		08	13.2 19.2	3.4	14	18.5	3.6		0.25	0.15	0.1	0.07		
		09	14.2 20.2		15	19.5								
		10	15.2 21.2		16	20.5								
		11	17.2 23.2		18	22.5								
		12	19.2 27		20	26.2								
		13	21.2 29		22	28.2								
		14	24.2 32		25	31.2								
		15	25.2 33		26	32.2								
		16	26.2 34		27	33.2								
XTS01		17	27.2 35	4.3	28	34.2	4.8	0.6	0.35	0.2	0.15	0.08		
		18	29.2 37		30	36.2								
		19	31.2 39		32	38.2								
		20	32.2 40		33	39.2								
		21	33.2 41		34	40.2								
		22	34.2 42		35	41.2								
		23	35.2 43		36	42.2								
		24	39 50.4		40	49.4								
		25	41 52.4		42	51.4								
		26	44 55.4		45	54.4								
		27	47 58.4		48	57.4								
		28	49 60.4	6.8	50	59.4	7.1	0.8	0.5	0.25	0.2	0.1		
		29	51 62.4		52	61.4								
		30	54 65.4		55	64.4								
		31	55 66.4		56	65.4								
		32	59 70.4		60	69.4								
		33	62 73.4		63	72.4								
XTS01		34	64 75.4		65	74.4								
		35	69 80.4		70	79.4								
		36	74 85.4		75	84.4								
		37	79 90.4		80	89.4								
		38	84 95.4		85	94.4								
		39	89 100.4	6.8	90	99.4	7.1	0.8	0.5	0.25	0.2	0.1		
		40	94 105.4		95	104.4								
		41	99 110.4		100	109.4								
		42	104 115.4		105	114.4								
		43	109 120.4		110	119.4								
		44	114 125.4		115	124.4								
		45	118 134		120	132.2								
		46	123 139		125	137.2								
		47	128 144		130	142.2								
		48	133 149		135	147.2								
		49	138 154		140	152.2								
XTS01		50	148 164		150	162.2								
		51	158 174		160	172.2								
		52	168 184		170	182.2								
		53	178 194		180	192.2								
		54	188 204		190	202.2								
		55	198 214	9.2	200	212.2	9.5	0.8	0.6	0.3	0.25	0.12		
		56	208 224		210	222.2								
		57	218 234		220	232.2								
		58	228 244		230	242.2								
		59	238 254		240	252.2								
		60	248 264		250	262.2								
		61	278 294		280	292.2								
		62	298 314		300	312.2								
		63	318 334		320	332.2								
		64	348 364		350	362.2								
		65	358 374		360	372.2								
		66	398 414		400	412.2								

请按图示订货

型号	
代码	规格
XTS01	01
(02)	

XTS01-02

未税价(元)

优惠价		
数量	1~7	8~
价格	100%	另行报价

交货期  
7

